LOWER SAN DIEGO RIVER WATER QUALITY

WY24 Water Quality Monitoring Report Appendices A-I



Winter Ludwigia growth at lower Walmart Pond (WQM Site 13E)

Water Quality Monitoring Data and Supporting Information

John C. Kennedy, PE

October, 2024

LOWER SAN DIEGO RIVER WY24 WATER QUALITY REPORT APPENDICES A-I

Table of Contents

	Pa	ige No
A.	RiverWatch Water Quality Monitoring Program	_
	Table A.1 LSDR Sections, Reaches and Monitoring Sites	
	Table A.2 - LSDR WQM Site Parameters	
	Table A.3 - LSDR Water Quality Monitoring Locations	
	Figure A.1 - Lower San Diego River Catchment Area and WQM Sites	
B.	SD River Hydrology in Relation to Water Quality	8-11
	Table B.1 - Lower SDR Average Daily Flows (WY05-WY24)	
	Table B.2 - Rainfall and Long-Term Streamflow (1914-2024)	
	Table B.3 - Annual Rainfall and Average Daily Flows (WY05-WY24)	
	Charts B.1 - B.3 - LSDRiver Hydrologic Data	
C.	Monthly WQM Site Data for WY23/WY24	12-22
	Table C.1 West, Mid & East Section Water Temperature Data	
	Table C.2 West, Mid & East Section pH Data	
	Table C.3 West, Mid & East Section Specific Conductance Data	
	Table C.4 West, Mid & East Section Dissolved Oxygen Concentration Data	
	Table C.5 West, Mid & East Section DO Percent of Saturation Data	
	Table C.6 Nutrient (NO3 and PO4) Data at Selected Sites	
D.	Water Quality Index Values	23-26
	Table D.1 WY23/24 WQI Values by Monitoring Site - West Section	
	Table D.2 WY23/24 WQI Values by Monitoring Site - Mid & East Sections	
	Chart D.1 LSDR Running Average WQI by Reach (WY05-WY24)	
	Chart D.2 LSDR Streamflow and WQI Running Averages (WY05-WY24)	
	Chart D.3 LSDR Temporal WQI Profiles and Streamflow	
	Chart D.4 LSDR Spacial WQI Profiles	
E.	WQM Summary Sheets (WQM Metrics for WY20 -WY24)	32-36
	Table E.1 RiverWatch WQM Data Summary for WY20	
	Table E.2 RiverWatch WQM Data Summary for WY21	
	Table E.3 RiverWatch WQM Data Summary for WY22	
	Table E.4 RiverWatch WQM Data Summary for WY23	
	Table E.5 RiverWatch WQM Data Summary for WY24	
F. '	Variance and Trends in Runnung Average WQM Metrics (WY05-WY24)	37-38
	Chart F.1 Variance and Trends in Running Average Water Temperature	
	Chart F.2 Variance and Trends in Running Average Specific Conductance	
	Chart F.3 Variance and Trends in Running Average pH	
	Chart F.4 Variance and Trends in Running Average Dissolved Oxygen	
	Chart F.5 Variance and Trends in Running Average WQIndex	
	Chart F.6 Variance and Trends in Running Average WQM Metrics	
	San Diego RiverWatch Program Monitoring Team Members	
H.	Glossary of Abbreviations, Terms and Equations	
T.	References	29-31

Appendix A RiverWatch Water Quality Monitoring Program

Appendix A provides an overview of SDRPF's RiverWatch water quality monitoring (WQM) program teams that have been engaged in collecting and assessing basic data pertaining to the Lower San Diego River (LSDR) watercourse on a continuous, monthly basis since Sept. 2004.

Monitoring Period & Coverage: Monthly monitoring over past 19 years (Oct. 2004 – Sept. 2023) covering the main course of the San Diego River and tributary streams extending some 18 miles downstream from Lakeside (elev. 340 ft amsl) to the Estuary (elev. 5 ft amsl) just below the I-5/Pacific Hwy. overpasses nearly 3 miles inland from the river's mouth at the Pacific Ocean. The lower river watershed and monitoring sites are shown on **Figure A.1**.

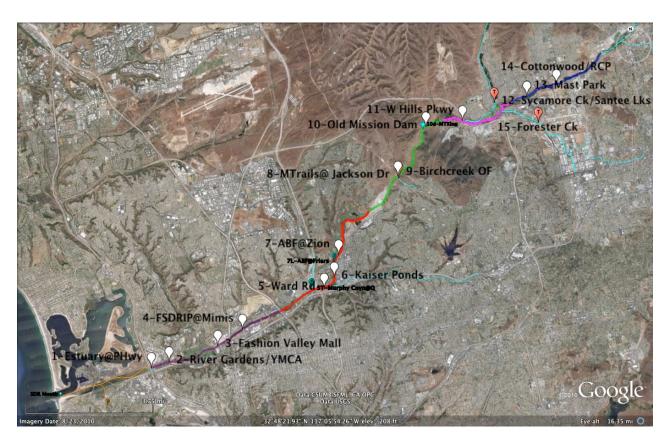


Figure A.1 - Lower San Diego River Drainage Area and WQM Sites

Color Code for LSDR reaches on figure above: Estuary (orange), LMV (purple), UMV (red), MG (dark green), LSB (violet), USB (dark blue), Lakeside (light green), key tributaries (light blue). Figure details can be downloaded through Google Earth from SDRPF website/River Monitoring page: file <Fig1.1WQMR.kmz>

Monitoring Sites: 17 total - 14 on main course (Mission Valley Section - sites 1-7, Mission Gorge Section - sites 8-10, Santee Basin Section - sites 11-15) plus three key tributary stream sites are listed in **Table A.1.**

SDRPF - RiverWatch 3 October 2024

Table A.1 LSDR Sections, Reaches and WQ Monitoring Sites

Section/Reach/Tributary	Site #s	Comments
Estuary entrance	1E/1W	Tidal influence at transition from estuary to river
Lower Mission Valley (LMV)	2E/W, 3	3-mile reach of lower river from I-5 to SR163
Mid-Mission Valley (MMV)	4, 5	2-mile reach extending from SR163 to I805
Upper Mission Valley (UMV)	6, 7	3-mile stretch from I-805 to Princess View Dr
West Sites - Mission Valley Section	(1-7)	8-mile western portion through Mission Valley
Mission Gorge (MG) Mid-Section	(8,9T,10)	5-mile midsection, Princess View Dr to Hollis Lk
Lower Santee Basin (LSB)	11,12T,15T	2-mile reach from Hollis Lk to Carlton Hills Blvd
Upper Santee Basin (USB)	13E/W, 14	3-mile reach from Carlton Hills Blvd to SR67
Santee Basin (SB) Section	(11-15T)	5-mile eastern portion from Mission Trails Regional Park to Lakeside (SR67)
East Sites - MG and SB	(8 -15T)	10-mile upper portions incl. MG and Santee Basin
	LSDR '	Tributaries:
Murphy Canyon/Qualcom a)	{5} a)	Enters LSDR southwest of Aztec Stadium
Jackson Dr/Birchcreek Outfall b)	9T	Enters LSDR at SD River/Aqueduct trail crossing (Suycott Wash)
Santee Lakes/E. Sycamore Cnyn Ck	12T	Enters LSDR at Carlton Oaks CC golfcourse (u/s)
Forester Creek c)	15T	Enters LSDR at W. Hills Pkwy. (u/s of Site 11)
Lower SDR Watershed (LSDR)	(1-15T)	Weighted average of all 5 reaches / all 3 sections

⁽a) Monthly monitoring discontinued in WY07; nearby Ward Rd bridge site (oriignally #6) renumbered as 5.

WQ Parameters: Seven key parameters are measured and recorded: Temp, pH, SpC, DO, DO%Sat, two nutrients; nitrogen (NO₃) and phosphrous (PO₄), plus subjective field observations regarding environs and general water characteristics, as listed in **Table A.2**. Nutrient testing is carried out at six river sites; two in West (2, 6) and four in East (11, 13W, 14, 15T). These monitoring data are used in performing statistical analyses regarding each identified reach and section of the river. The number of datum for each physical-chemical parameter monitored at each site compiled over the 20-year period exceeds several hundred providing a firm statistical basis in performing analyses. Two additional parameters compiled at several sites by other entities include streamflow derived from USGS (Poway Office) gauging station data and coliform counts from the SDCoastKeeper database. Both data sets have been used for purposes of computing the LSDR water quality index.

Protocol: Eastern Sites – (Santee Basin & Mission Gorge sections). Nine sites located within the three upper reaches (MG, LSB, USB) are typically monitored the 3rd Fri. of every month by the RiverWatch East Team. Western Sites – (Mission Valley section). Seven sites within the three

SDRPF - RiverWatch 4 October 2024

⁽b) Monthly monitoring initiated in 2008; site also termed Jackson Dr. Outfall (OF) is along the SDR Xing trail.

⁽c) Monthly monitoring initiated in 2007 with adjusted site locations in 2009 and 2015 during channel improvements, reverted back to near original location at Mission Gorge Rd. Bridge in 2018.

lower reaches (LMV, MMV, UMV) of the watershed are typically monitored by the RiverWatch West Team preceding or immediately following east site monitoring.

Table A.2 - LSDR Water Quality Monitoring Parameters

Table A.2 - Lobit Water Quality Worldoning Larameters								
WQ Parameter	unit	Comments						
Λ	Aeasured mor	nthly at all sites:						
1. Temperature (Water Temp)	°C	Basic characteristic and WQ driver (see Table C.1)						
2. pH	-	Degree of acidity (<7.0) or alkalinity (>7.0) (see Table C.3)						
3. Specific Conductivity (SpC)	mS/cm	Measure of ionic content or dissolved solids (see Table C.2)						
4. Dissolved Oxygen (DO)	mg/L	Good indicator of relative water quality (see Table C.4)						
5. Percent of DO Saturation (DO%Sat)	%	Good indicator of general water quality (see Table C.5)						
Sampled/tested n	ionthly at sel	lected sites: (typically 3-5 East & 2 West)						
6. Nitrate (NO ₃ -N) mg/L Basic nutrient for biological activity (see Table C-6)								
7. Phosphate (PO ₄ -P)	mg/L	Key nutrient for biological activity; in excess, can be limiting						
8. Turbidity	NTU	General indicator of amount of suspended/settleble solids						
9. Barometric Pressure	mBars	Atomosphiric (air) pressure that along with water temperature affects dissolved oxygen levels/other readings.						
Enviro	onmental Ob	servations recorded at all sites:						
activity (aquatic, avian, terrestrial), exp	ansion of inv	a, odors, etc.), trash/debris, homeless encampments, biological asive species, erosion, scouring, other noteworthy comments re: al note as to invasive aquatic plant growth on water surface.						
General WQ Conditi	ons observed	at all sites: (numerical coding added in 2010)						
Weather Condition, Presence of Algae,	Clarity, Color	; Odor, Flow, Foam, Litter, Odor, Oil and Grease (O&G), e						
Para	meters measu	rred by others at selected sites						
10. Streamflow	cfs	USGS gauging stations at Fashion Valley and Mast Rd. near Santee (see Table B.1)						
11. Coliform counts: (Escheria-coli, Enterococcus, Total Coliform bacteria)	MPN/ 100mL	SD CoastKeeper data taken at Fashion Valley Rd and Old Mission Historic Dam monitoring sites (see archives).						

Team Leaders (1-2) and citizen volunteers (2-6) typically meet at an appointed location, organize field equipment, transportation, drive to sites, measure physical-chemical water quality parameters using a YSI Sonde device, note special conditions/observations, collect samples for subsequent nutrient testing, return to a designated field site or office, perform (NO₃ & PO₄) tests, store samples for subsequent analyses as needed, clean/check-in/store field equipment and, if time, further discuss findings, observations/results.

SDRPF - RiverWatch 5 October 2024

Table A-3 - San Diego RiverWatch Water Quality Monitoring Site Locations

Site	Site Name	u/s mi.	Elev. ft.	Location		ordinates					
#	T			1. 07 II	Lat.	Long.					
		-		ending 2.5 miles upstream to SR163 (incl. sites 1							
1	Estuary E/W	2.96	6	between PCHwy & I-5 on encased sewer main	32.76131	-117.20373					
2	River Gardens E/W	3.50	11	W of YMCA, d/s of trolly at sewer/ped X-ing	32.7623	-117.1944					
3	Fashion Valley Mall W	5.08	22	below T&C foot bridge by FV Transit Center	32.76517	-117.16869					
MMV - Middle Reach Mission Valley: SR163 extending 3.1 miles upstream to I-15 (incl. sites 4,5)											
4	FSDRIP at Mimi's	5.98	36	d/s on Mission Center Rd. bridge W	32.76986	-117.15482					
5	Ward Rd Bridge	8.89	50	below trolly overpass at Camino. del Rio N	32.78024	-117.11029					
UMV	- Upper Reach E Mission Va	lley: I-	15 exte	ending 2.5 miles upstream to N end of Admiral B	aker Field	(Sites 6,7)					
6	Kaiser Ponds	9.46	56	E. of Mission SD de Acala at SD Mission Rd.	32.78406	-117.10419					
	Admiral Baker Field	9.98	58	L - Lower (below Friars Rd bridge)	32.79038	-117.10314					
7	ABF - Zion/Riverdale	10.2	62	Z - Terminus of Zion Ave at Riverdale St.	32.79304	-117.09984					
West	(MV) - Mission Valley Section	n: I-5 †	to Adn	niral Baker Field E (incl. sites 1-7) [LMV,MMV,U	MV]						
MG - Mission Gorge Reach: ABF-E extending 3.5 miles upstream to Old Mission Dam (incl. sites 8-10)											
8	Mission Trails @ Jackson D	13.82	159	SDCWA d/s of Suycott Crossing	32.82124	-117.06205					
9T	Jackson/Birchcreek OF	13.86	198	San Marcos stormdrain by River Xing Trail	32.82268	-117.06224					
10	Old Mission Dam W/E	15.65	265	Downstream side of Old Mission Dam	32.83977	-117.04332					
Mid-S	Section (MG) -Mission Gorge	Sectio	n: Qua	arry Area to Old Mission Dam (incl. sites 8-10)							
LSB -	Lower Reach Santee Basin: V	V Hills	s Pkwy	to Carlton Hills Bridge (incl sites 11,12T,15T)							
11	West Hills Pkwy	17.03	300	below West Hills Pkwy overpass at USGS sta.	32.83936	-117.02436					
12T	Carlton Oaks Dr/Santee L	18.23	320	W Sycamore Ck/Santee Lakes @ Carlton Oaks	32.84431	-117.00635					
15T	Forester Creek at Mission Gorge Rd (Rt 52/Prospect)	18.86	334	Primary tributary entering SDR just u/s of Site 11 past W.Hills Pkwy/Rt 52 at W end of CGC	32.83221	-116.98658					
USB -	Upper Reach Santee Basin: (Carltor	n Hills	Blvd extending 3 miles upstream to Riverford Ro	l (incl. site	s 13W/E,14					
13W	Mast Park West	18.35	328	below Carlton Hills Blvd. Bridge	32.4691	-116.97333					
13E	Mast Park East (Wallmart Ponds foot bridge)	18.50	330	Pedestrian bridge behind (N of) Walmart and trail at end of River Rock Ct.	32.84696	-116.97335					
14W	Cottonwood Ave/RCP	19.84	340	N. of Chubb Ln. d/s of old RCP plant culvert	32.84434	-116.98947					
14E	Magnolia Ave. bridge	19.9	342	Under Magnolia Bridge/west end of culverts	32.84424	-116.98950					
East (SB) - Santee Basin Section: W	est Hi	lls Parl	kway to Lakeside (Sites 11-15 above) [LSB+USB]							
LSDI				l: SD Estuary extending 18.5 miles to Lakesio MV+MMV+UMV+MG+LSB+USB]	de @ SR67	7					

Data Management: Water quality data recorded by team volunteers are regularly managed via a three-step process.

- 1. *Raw (source) data* each site, several of which have two monitoring locations (e.g. upstream/downstream of dam, riffle or crossing), date/time, measured WQ parameters, and non-quantifiable supporting observations and comments.
- 2. *Compiled (vetted/proofed) data* provided on website w/date, site location, parameter value and additional observations of general interest.
- 3. *Processed (formatted/aggregated) data* with statistical computations associated with LSDR sites, reaches, sections and tributaries for each WQ parameter of interest. Monthly and annual summary results presented on SDRPF website/RiverWatch Online Info. Center webpage.

Statistical Computations: Basic statistical values calculated from the data include

Mean – average of a series (sum of values divided by number of values)

Median – middle value of an ordered series (50% larger - 50% smaller)

Minimum – lowest or smallest value measured

Maximum - highest or greatest value measured

Range – Difference between maximum and minimum values

1st Quartile (Q1) – 25% of values smaller - 75% larger

 2^{nd} Quartile (Q2) – 50% of values larger - 50% smaller (same as median value)

3rd Quartile (Q3) – 75% of values smaller - 25% larger

Variance – sum of the squares of deviation from the mean or average value

Standard Deviation (SD) – square root of the Variance

Skew – third moment about the Mean divided by the Standard Deviation

Coefficient of Variance (CoV) – Variance divided by the Mean

Trendlines - Moving/running average values taken over 12-month period.

Riverwatch WQM Program Reporting: Monthly and annual reports regarding the quantifiable water quality data monitored and resultant metrics for the lower San Diego River watershed are prepared on a regular basis and posted to the SDRPF website (see https://www.sandiegoriver.org (click on <Our Work/Conserve/Healthy River, Healthy Communities/RiverWatch/Online Information Center>). Additionally the field data are compiled to a master database for both record keeping purposes and sharing with interested parties.

SDRPF - RiverWatch 7 October 2024

Appendix B Lower San Diego River Hydrology and Water Quality

Streamflow or river discharge, is the volume of water moving past a designated location over a fixed period of time. It constitutes one of the primary drivers of changes in water quality. Often expressed as cubic feet per second (cfs) or million gallons per day (mgd), flow is the amount of water moving off a watershed or catchment area into the watercourse, as affected by weather (e.g., increasing during after rainstorms and decreasing during dry spells) and continually changing throughout each season. River flow rapidly decreases during summer months when rainfall is minimal, evaporation rates high and riparian vegetation extracts water from adjacent lands. August and September, the last two months of summer (and the water year), are commonly, but not always, months of lowest flow. A function of both volume and velocity, streamflow has a major impact on living organisms, riparian habitat, benthic conditions and overall river water quality. Velocity of flow, typically increasing as volume increases, determines the kinds and types of organisms that live in an aquatic system and also affects the amount of silt and sediment transported. Fast moving water typically contains much higher DO concentration levels than sluggish flows, as its better aerated, whereas eutrophication most often occurs in reaches with very low velocity.

LSDR average daily flow (ADF) values as recorded at two USGS gauging stations in the lower watershed are expressed for the 20-yr monitoring period (Oct 2004 - Sept 2024) and over the past 60 years (1965-2024) of record in **Tables B.1** through **B.3**. WY24 ADF values by season and associated 20-yr norms are presented in **Table B.1**. Long term total annual rainfall and average annual streamflow are expressed in **Table B.2**. **Table B.3** provides annual rainfall and streamflow over the last two decades. Recent streamflow norms are roughly 20% less than long-term (60-yr) values in Mission Valley and 26% less for the Santee Basin. Average LSDR streamflow for WY24 is 47% greater than the current norm and 66% more than the long-term average.

In terms of total annual rainfall (TARF), as shown in **Table B.3**, WY05 has been the only "Very Wet" (TARF > 20") hydrologic year occuring over the last twenty annual cycles. On the other hand, there have been four water year's (07,13,14, and 21) that were all "Very Dry" (TARF <5"). WY24 total rainfall of 14 inches (350 mm) is 45% above the 20-yr norm of 9.54 inches (242 mm). The 20-yr ADF's for the East and West sections of the lower river are roughly 25% below longrange values while average daily flows for this year (WY24) were 60% above 20-yr norms and greater than the long-range (60-yr) values.

Monthly discharge data (min, max and average daily flow) for the two USGS gauging stations extending from Oct. 2004 through Sept. 2023 have been plotted on **Chart B.1.** Average daily flow (ADF) for the Lower San Diego River varies from less than 0.2 cfs (0.1 mgd) during the summer (dry) months to nearly 220 cfs (142 mgd) during several winter (wet) periods in the East (Santee Basin) and up to 390 cfs (252 mgd) in the West (Mission Valley) section. Running average ADF values, trending downward in WY12-WY14 began a slight increase in WY15, tempered by slight declines in WY18 and again in WY21&22. WY23&WY24 streamfow increased significantly to where running average values were / are considerably above norms.

SDRPF - RiverWatch 8 October 2024

Table B.1 - Lower SDR Average Daily Streamflow (WY24 and 20-yr Norms)

Location	West - Mis	sion Valley	East - San	itee Basin	LSI	OR (a)
Season	WY24	20yr Norm	WY24	20yr Norm	WY24	20yr Norm
Fall (Oct-Nov) ADF, cfs	27.1	15.2	18.4	9.8	22.0	12.0
Winter (Dec-Mar) ADF, cfs	33.3	74.7	17.0	40.5	21.5	54.8
Spring (April-May) ADF, cfs	31.1	22.2	22.1	12.8	25.9	16.8
Summer (June-Sept) ADF, cfs	19.7	3.3	9.6	1.9	12.8	2.5
Annual ADF (b), cfs	49.1	32.3	30.9	18.3	38.5	23.9
(Annual ADF, mgd)	(26.4)	(17.4)	(16.6)	(9.8)	(20.7)	(12.9)
Wet Season (Nov-April)	89.9	58.0	55.5	31.9	69.8	42.8
Dry Season (May-Oct)	6.1	5.4	5.3	3.2	6.0	3.8
River Discharge, AFY (c)	29,568	19,488	18,592	10,976	23,184	14,448

a) Lower San Diego River average daily flow represents mean hydrologic conditions based on averaging the two USGS gauging station streamflow values.

Table B.2 - Total Annual Rainfall (1914-2024) and Average Daily Streamflow

There o	# of	Perce	ent of	Tota	l Annual Rai	nfall ^(a)	Average Daily Streamflow, cfs			
Туре	Years	Total	Years	inches	mm	Avg.,	East (b)	West (c)	LSDR	
Very Wet	3	3%		>20"	>500	580/23"	68	113	92	
Wet	11	10%	32%	15-20	380-499	430/17"	48	81	66	
Above Norm	22	20%		12-15	300-379	340/13"	26	44	35	
Normal	40	36%	36%	8-12	200-299	250/10"	10	18	15	
Dry	28	25%	2201	5-8	125-199	160/6"	7	12	10	
Very Dry	8	7%	32%	<5"	<125	100/4"	5	9	7	
Total/AAvg	112	100	0%		254	9.98"	14	23	17	

a) Total annual rainfall accumulated from 1 October through September 31 of a water year.

Monthly and seasonal average daily flow (lines) and annual rainfall (bars/columns) over the monitoring period for both stations are shown in **Chart B.2.** As wet season flows are several hundred times greater than dry-season summer-time flows, the flow values are expressed on log scale, whereas the rainfall scale is arithmetic. Seasonal flow patterns express range, variance and a strong positive correlation between log ADF values and monthly rainfall over the past 20 years of record.

SDRPF - RiverWatch 9 October 2024

⁽b) ADF values are expressed in cubic feet per second (cfs) and million gallons per day (mgd); 1 cfs = 0.583 mgd.

⁽c) Total average annual discharge expressed in acre-feet (1 mgd = 1120 AFY).

b) Santee Basin USGS Stream Gauge Station 11022480 below West Hills Pkwy Bridge near Mast Blvd. in Santee.

c) Mission Valley USGS Stream Gauge Station 11023000 at Fashion Valley Mall; incomplete data prior to 1968.

Table B.3 - Annual Rainfall and Average Daily Flow (WY05-WY24)

	Annual Rainfall			A P	ADF, cfs (mgc	1)		
(Type of Year)	mm	inches	Variance (a)	East (b)	West (c)	LSDR	Variance (d)	
WY05 (Very Wet)	574	22.60	137%	50.9 (33)	100 (65)	71.5 (46)	207%	
WY06 (Dry)	152	6.00	-37%	10.7 (7)	17.5 (11)	13.6 (9)	-42%	
WY07 (Very Dry)	98	3.85	-60%	7.2 (5)	12.8 (8)	9.5 (6)	-59%	
WY08 (Dry)	183	7.20	-24%	13.3 (9)	25.0 (16)	18.2 (12)	-22%	
WY09 (below normal)	232	9.15	-4%	15.0 (10)	27.2 (18)	20.1 (13)	-14%	
WY10 (above normal)	282	10.6	11%	25.1 (16)	42.5 (27)	32.4 (21)	39%	
WY11 (above normal)	323	12.70	33%	43.3 (28)	61.9 (40)	46.9 (30)	102%	
WY12 (Dry)	201	7.90	-17%	11.9 (8)	19.1 (12)	14.9 (10)	-36%	
WY13 (Very Dry)	165	6.56	-31%	8.1 (5)	10.6 (7)	9.1 (6)	-61%	
WY14 (Very Dry)	129	5.09	-47%	4.3 (3)	6.1 (4)	5.1 (3)	-78%	
WY15 (above normal)	302	11.91	25%	7.1 (5)	15.2 (10)	10.5 (7)	-55%	
WY16 (Dry)	208	8.20	-14%	12.2 (8)	20.4 (16)	15.6 (10)	-33%	
WY17 (above normal)	323	12.53	31%	27.7 (18)	57.3 (37)	40.0 (26)	72%	
WY18 (Very Dry)	85	3.24	-66%	5.5 (4)	7.2 (5)	5.9 (4)	-75%	
WY19 (above normal)	327	12.89	34%	20.1 (13)	35.5 (24)	27.0 (17)	13%	
WY20 (above normal)	345	13.60	43%	22.3 (14)	48.6(31)	33.1 (21)	46%	
WY21 (Very Dry)	120	4.76	-50%	7.2 (5)	11.6 (9)	9.0 (6)	-62%	
WY22 (Dry)	171	6.75	-29%	6.9 (5)	15.3(10)	10.3 (7)	-55%	
WY23 (Wet)	399	15.72	65%	44.3 (27)	68.1 (39)	49.1 (32)	131%	
WY24 (above normal)	350	14.01	45%	29.5 (16)	47.5 (26)	33.6 (20)	58%	
20-yr Norm (05-24)	242	9.54	0%	18.1 (6)	30.8 (20)	21.2(14)	0%	
60-yr AAD	250	10.0	5%	21.8/(14)	36.7 (24)	28.4 (18)	22%	

a) Percent difference from 20-yr average total annual rainfall (9.54 in/yr); black-above, red-below average.


Average daily streamflow (lines) and total annual rainfall (columns) are also expressed in **Chart B.3** on a water-year basis. Highest flows during the monitoring period at both gauging stations were recorded in WY05 (very wet year); while the lowest was in WY14 (very dry year) following three years of well below normal rainfall. (WY12-14). All years of well below low rainfall (WY's 07,14,18&21) also experienced below normal streamflow. The years of highest rainfall were all above normal in terms of streamflow. Both WYs23&24 experienced above normal rainfall and streamflow. The variances and patterns in rainfall and streamflow are consistant for both summer and winter results and for eastern and western sections of the river.

SDRPF - RiverWatch 10 October 2024

b) Santee Basin USGS Stream Gauge Station 00067556 near Mast Rd., Santee (West Hills Pkwy.)

c) USGS Stream Gauge Station 00459999 at Fashion Valley Mall; incomplete data prior to 1965.

d) Percent difference from 20-yr LSDR average daily streamflow.

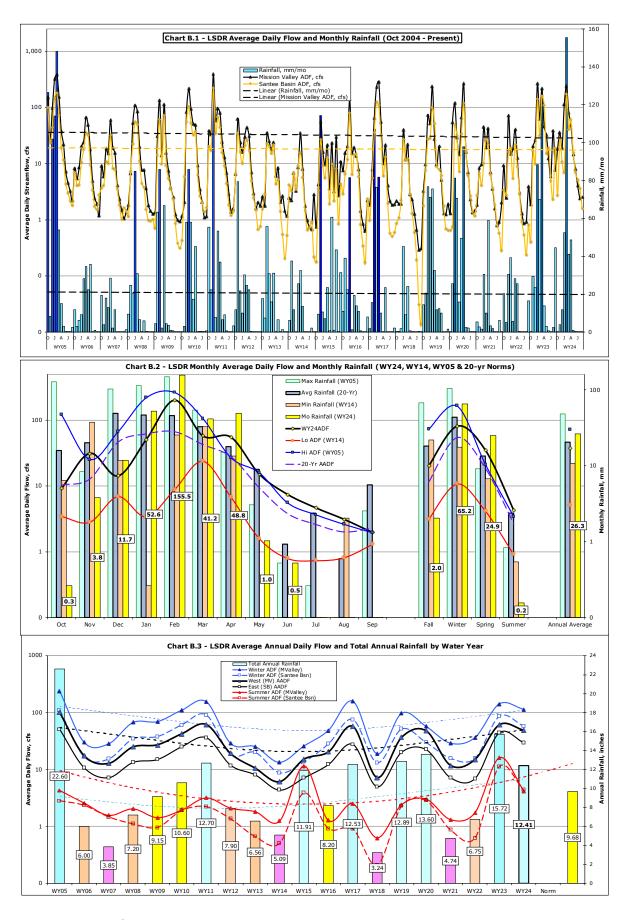

Appendix C Monthly WQM Site Data for WY24 and WY23

Appendix C contains 12 tables incorporating this year's (WY24) and last year's (WY23) RiverWatch water quality monitoring data by month (down) and site (across). Tables C.1(W&E) list water temperature in degrees Celsius, Tables C.2 (W&E) - Specific Conductance in mS/cm, C.3(W&E) - pH, C.4(W&E) - Dissolved Oxygen concentrations in mg/L, C.5(W&E) - DO as Percent of Saturation and C.6-Nutrient (NO3 & PO4) concentrations at selected west and eastern sites.

Table C.1(W) West Section Water Temperatures WY24/WY23 Data

Site #	1	2	3	4	5	6	7	
Reach	Lo	wer Mission Va	lley	Mid Miss	ion Valley	Upper Mission Valley		
Oct	21.1/21.8	22.6/19.3	22.4/19.9	22.8/19.6	20.1/18.9	21.2 /19.6	21.4/20.4	
Nov	16.3/13.4	14.7/13.1	14.5/13.5	14.0/13.1	14.0/11.9	13.6/12.5	13.5/12.4	
Dec	13.4/11.3	13.3/11.2	13.3/11.2	13.0/11.1	12.1/10.2	12.9/10.4	12.5/10.7	
Jan	11.7/11.8	11.6/11.8	11.3/11.5	11.4/11.7	10.3/11.4	10.9/11.7	10.5/11.4	
Feb	17.3/14.1	14.1/12.6	14.2/12.2	13.8/12.2	14.8/11.3	14.0/11.6	14.7/11.1	
Mar	18.1/15.0	18.0/14.9	17.9/15.0	17.5/14.5	17.3/14.6	17.1/14.6	16.6/14.5	
Apr	19.4/18.0	19.3/17.9	19.2/17.8	19.3/17.7	18.3/17.0	18.5/17.7	18.3/17.2	
May	20.6/20.5	20.5/20.1	21.9/20.1	20.5/20.0	19.8/19.9	20.5/20.5	20.5/19.9	
Jun	22.2/23.6	22.2/23.5	22.2/23.5	22.3/24.2	21.5/21.5	22.3/22.4	22.3/22.6	
Jul	24.4/25.5	25.2/25.5	25.3/24.9	26.2/25.5	23.4/23.3	25.3/24.1	24.0/22.7	
Aug	25.7/25.2	26.0/24.4	25.4/24.9	26.2/25.5	23.0/21.8	25.2/23.6	23.8/22.6	
Sept	24.5/22.1	25.0/22.7	25.3/23.0	26.7/23.1	21.4/21.2	24.4/22.5	22.7/22.1	
AAvg	19.5/18.5	19.4/18.1	19.4/18.1	19.5/18.2	18.0/16.9	18.8/17.6	18.4/17.3	
Norm	(19.66)	(18.97)	(19.15)	(19.54)	(17.21) ^d	(18.27)	(18.10)	

SDRPF - RiverWatch 12 October 2024

Table C.1(M/E) Middle and East Section Water Temperature WY24/WY23 Data

Site	8	9T	10	11	15T	12T	13W	13E	14
Reach	Mission Gorge			Low	er Santee B	asin	Upper Santee Basin		
Oct	18.7/19.3	15.7/20.6	18.6/21.2	18.7/20.0	19.4/20.4	21.5/21.9	17.2/19.8	19.1/21.2	22.0/22.5
Nov	14.4/11.4	14.8/8.3	14.3/11.2	14.2/12.0	17.0/11.1	15.0/12.9	14.3/11.1	16.6/12.8	14.7/14.8
Dec	9.6/10.0	8.0/8.5	9.5/9.8	10.5/11.3	10.6/10.2	11.4/11.2	9.8/10.1	12.0/9.3	12.8/11.9
Jan	8.9/11.9	7.3/13.0	9.0/11.8	9.6/11.9	11.5/11.4	10.6/11.6	5.2/11.8	11.0/10.3	11.7/12.0
Feb	12.9/9.8	13.4/8.6	12.8/9.9	12.8/9.9	13.0/11.1	12.8/10.4	12.9/9.7	14.5/10.6	13.4/12.2
Mar	15.7/13.9	13.2/13.8	15.9/13.9	15.3/13.5	17.2/13.1	16.4/12.7	14.6/14.1	17.8/15.6	15.4/15.0
Apr	17.5/15.4	18.4/13.5	17.9/15.6	17.4/15.3	17.2/14.4	18.6/14.4	17.4/13.9	17.5/16.6	17.0/17.6
May	19.1/18.5	16.6/16.2	19.0/18.6	18.4/18.8	20.0/19.1	17.4/19.6	18.5/19.6	19.6/18.1	21.7/21.8
Jun	21.3/20.1	18.4/18.2	22.2/19.8	19.9/18.7	22.7/21.3	18.3/19.5	20.0/18.5	21.9/20.5	24.9/22.9
Jul	22.9/21.9	19.8/17.9	23.3/22.7	22.3/20.9	23.6/22.4	-	21.3 /19.5	23.0/22.5	26.5/25.6
Aug	23.6/23.1	20.9/20.5	23.8/22.7	23.1/21.8	24.0/22.7	-	22.4/-	23.7/23.1	27.2/25.6
Sep	22.3/21.9	19.3/19.1	21.9/21.4	21.1/20.9	21.9/21.6	-	21.0/20.2	22.6/22.1	26.0/21.6
AAvg	17.2 /16.4	15.5/ 14.9	17.4 /16.6	16.9 /16.3	18.2 /16.6	15.8/14.9	16.2/15.3	18.3 /16.9	19.4 /18.6
Norm	(17.09)	(15.62) e	(17.53)	(16.67)	(17.80)	(17.35)	(15.78)	(18.19)	(17.87)

a) All values are expressed in oC.

b) Annual average water year values and 20-yr norms are based on unweighted averaging of monthly data (Oct-Sept); water temps >20 oC are shown in red, and <15 oC in blue.

c) Forester Creek discharges within the Lower Santee Basin below Carlton Hills Golfcourse just upstream of SR52.

d) Site 5 (Mast Rd Bridge) monthly water temperatures are typically several degrees less than other west section readings due to groundwater exfiltration (springs) located just upstream.

e) Site 9T (Birchcreek Outfall) temperture values are typically lower than at other sites as the water source is nearby groundwater seeps draining a small upstream catchment.

Table C.2(W) West Section WY24/WY23 Specific Conductance Data

Site #	1	2	3	4	5	6	7	
Reach		Lower Missi	on Valley		Upper Mission Valley			
Oct	7.56/18.73	2.92/3.22	2.77//3.01	2.63/3.07	2.74/3.69	2.54/4.43	2.59/2.29	
Nov c	1.45/2.85	1.28/1.93	1.25/1.73	1.21/1.82	1.07/2.08	1.03/1.59	0.99/1.86	
Dec	19.45/2.45	2.01/2.35	1.99/2.26	2.00/2.15	1.89/1.89	1.77/1.53	1.77/1.49	
Jan	10.95/1.60	1.86/1.53	1.77/1.58	1.85/1.66	1.63/1.58	1.54/1.52	1.51/1.59	
Feb	5.53/19.75	1.10/2.94	1.07/2.95	1.09/2.87	0.99/2.34	1.00/2.26	1.04/2.31	
Mar	1.80/0.86	1.62/0.82	1.54/0.81	1.50/0.84	1.35/0.78	1.35/0.79	1.40/0.82	
Apr	1.60/1.94	1.58/1.89	1.49/1.82	1.51/1.78	1.40/1.69	1.39/1.68	1.37/1.66	
May	2.20/2.72	2.08/2.48	2.03/2.39	1.97/2.27	1.87/2.09	1.76/2.07	1.74/1.91	
Jun	3.34/3.19	2.42/2.46	2.32/2.34	2.26/2.28	2.18/2.36	2.05/2.06	2.01/2.14	
Jul	5.72/8.49	2.83/2.92	2.71/2.77	2.66/2.75	2.58/2.87	2.43/2.49	2.34/2.55	
Aug	9.97/15.57	3.32/3.30	3.16/3.13	3.04/2.95	3.05/3.28	2.94/2.96	2.64/2.89	
Sep	6.06/15.53	3.41/2.44	3.33/2.36	3.31/2.28	3.26/2.46	3.25/1.97	3.63/2.17	
AAvg	6.30/7.81	2.20/2.36	2.12/2.26	2.09/2.23	2.00/2.26	1.92/2.11	1.92/1.97	
Norm	(9.255)	(2.634)	(2.520)	(2.432)	(2.571)	(2.551)	(2.412)	

a) All values expressed in milli-Siemens/cm; SpC values >4.0 mS/cm are shown in blue, values < 2.0 mS/cm are in green.

b) Average annual WY23/24 SpC values are less than 20-yr norms at all west section sites (1-7).

Table C.2(M-E) Middle and East Section WY24/WY23 Specific Conductance Data

Site	8	9T	10	11	12T	13E	14	15T	13W
Reach	Mission Gorge		Lower Santee Basin		Upper Santee Basin		LSB c	LSB	
Oct	2.20/3.66	2.83/5.54	2.20/3.24	2.08/2.98	1.71/2.30	1.09/2.63	0.83/2.06	2.20/2.84	0.83/2.06
Nov	0.87/2.77	2.31/5.54	0.87/2.79	0.86/2.83	1.78/3.0	0.74//2.41	0.55/2.07	1.56/2.54	0.55/2.08
Dec	1.64/1.92	4.40/4.51	1.64/2.10	1.62/2.27	1.73/2.28	1.10/1.40	0.91/1.96	2.61/2.48	0.91/1.96
Jan	1.13/1.34	3.46/2.63	1.52/1.31	1.38/1.25	1.47//0.84	1.16/1.54	1.09/0.76	0.97/2.16	1.09/0.76
Feb	0.98/2.20	2.30/5.43	1.01/2.28	1.03/2.44	0.58/1.16	0.86/1.21	0.73/1.11	2.50/4.00	0.73/1.11
Mar	1.26 / 0.60	3.63/1.52	1.30/0.63	1.36/0.71	0.73/0.24	1.19/0.73	0.73/0.65	2.45/0.23	0.73/0.65
Apr	1.28/1.58	3.67/3.02	1.31/1.58	1.38/1.61	0.76//0.96	1.15/1.20	1.13/1.10	1.61/2.62	1.13/1.10
May	1.56/1.80	3.90/3.18	1.59/1.70	1.65/1.64	0.56/0.98	1.43/1.77	1.34/1.44	2.55/2.75	1.34/1.44
Jun	1.79/1.76	3.90/3.07	1.81/1.78	1.83/1.80	0.58/1.09	1.56/1.29	1.45/0.96	2.56/2.74	1.45/0.96
Jul	2.00/2.21	4.28/2.94	1.32/2.25	2.08/2.32	dry	1.71/1.54	1.49/1.19	2.66//2.95	1.49/1.19
Aug	1.44/2.47	4.71/3.25	1.82/2.49	2.27/2.58	dry	1.86/1.87	1.66/1.35	2.80/2.84	1.66/1.35
Sep	2.37/2.06	4.72/2.99	2.40/2.10	2.34/2.15	dry	1.91/0.96	1.67/0.70	2.86/2.66	1.67/0.70
AAvg	1.54 /2.03	3.68 /3.64	1.56/ 2.02	1.66 /2.05	1.10/ 1.49	1.31 /1.54	1.13 /1.28	2.25 /2.62	1.13 /1.24
Norm	(2.261)	(4.614)	(2.201)	(2.198)	(1.582)	(1.861)	(1.492)	(2.645)	(1.572)

a) All values expressed in milli-Siemens/cm; values < 2.0 mS/cm are in green: > 4.0 mS/cm are in blue.

b) WY24/WY23 annual averages and 20-yr norms (in italics) are based on averaging of monthly data (Oct-Sept).

c) Forester Creek discharges within the Lower Santee Basin enter just upstream from W Hills Pkwy Bridge.

d) Average WY24 SpC values are less than last year's (WY23) values and 20-yr norms at all Mid and East sites (8-15T).

Table C.3(W) West Section WY24/WY23 pH Data

Site #	1	2	3	4	5	6	7	
Reach		Lower Miss	ion Valley		Upper Mission Valley			
Oct	7.62/7.51	8.00/7.42	7.44/7.41	7.99/7.37	7.56/7.56	7.46/7.56	7.69/7.50	
Nov	7.67/7.60	7.62/7.58	7.67/7.68	7.61/7.62	7.65/7.65	7.60/7.64	7.74/7.66	
Dec	7.49/7.58	7.40/7.59	7.31/7.59	7.40/7.58	7.31/7.50	7.22/7.48	7.63/7.51	
Jan	7.85 / 7.65	7.94/7.62	8.03/7.72	7.85/7.69	7.94/7.65	7.76/7.62	7.77 / 7.62	
Feb	7.81/7.65	7.66/7.74	7.79/7.80	7.72/7.77	7.87/7.70	7.73/7.62	7.83/7.73	
Mar	7.90/7.64	7.89/7.59	7.93/7.87	7.80/7.70	7.89/7.76	7.78/7.72	7.91/7.82	
Apr	7.81/7.74	7.79/7.66	7.93/7.70	8.10/7.66	8.00/7.67	8.12/7.65	8.32/7.84	
May	7.75/7.76	7.75/7.68	7.72/7.67	7.70/7.71	7.70/7.77	7.64/7.66	7.81/7.87	
Jun	7.86/7.92	7.88/7.81	7.80/7.80	7.87/7.81	7.78/7.53	7.73 / 7.57	7.86/7.74	
Jul	7.85/7.68	7.67/7.63	7.71/7.69	7.84/7.76	7.65/7.45	7.54/7.39	7.62/7.36	
Aug	8.02/7.66	7.67/7.62	7.95/7.68	7.93/7.71	7.80/7.47	7.63/7.46	7.47/7.19	
Sep	7.98/7.43	7.64/7.57	7.73/7.61	7.90/7.54	7.59/7.43	7.59/7.33	7.20/7.37	
AAvg	7.80/7.65	7.74/7.63	7.75/7.69	7.81/7.66	7.73/7.60	7.65/7.56	7.74/7.60	
Norm	(7.75)	(7.68)	(7.75)	(7.78)	(7.63)	(7.61)	(7.58)	

a) All pH values are unit-less; values of 8.0 or greater are listed in red and 7.5 or below in green.

b) WY24& WY23 pH values and 20-yr norms are based on averaging of monthly data (Oct-Sept).

Table C.3(M-E) Middle and East Section WY24/WY23 pH Data

Site	8	9T	10	11	12T	13E	14	15T	13W
Reach	N	lission Gorg	e	Lower Santee Basin		Upper Santee Basin		LSB c	LSB
Oct	8.00/7.19	8.37/8.11	7.90/7.54	7.56/7.63	7.73/ 7.16	7.42/7.58	7.76/7.68	7.79/7.74	7.42 / 7.58
Nov	8.01/8.04	8.29/8.38	7.74/7.64	7.62/7.69	7.57/ 8.09	7.41/7.79	7.67/7.80	7.66/8.07	7.41 / 7.79
Dec	8.01/8.06	8.21/8.33	7.58/7.90	7.67/7.69	7.40 / 7.76	7.40/7.73	7.58/7.89	7.53/7.86	7.40/ 7.73
Jan	8.21/7.89	8.30/8.39	7.76/7.59	7.67/7.55	8.03 / 7.77	7.94/7.27	7.49/7.78	7.76/8.05	7.94 / 7.27
Feb	8.21/8.09	8.55/8.48	7.66/7.85	7.69/7.74	7.99 / 7.94	7.57/7.65	7.59/7.79	8.27/8.31	7.57/ 7.65
Mar	8.31/7.93	8.30/8.34	7.70/7.62	7.74/7.55	7.77 / 7.77	7.60/7.46	8.67/8.15	8.13/8.22	7.60/ 7.46
Apr	8.44/8.18	8.35/8.41	7.71/7.64	7.73/7.70	7.76/ 7.70	7.48/7.65	7.10/7.79	8.32/8.20	7.48/ 7.65
May	8.26/7.93	8.21/8.26	7.77/7.74	7.78/7.75	7.63 / 7.93	7.59/7.58	7.87/7.88	8.03/8.04	7.59/ 7.58
Jun	8.30/8.18	8.26/8.21	8.02/7.84	7.84/7.68	7.68 / 7.70	7.62/7.38	8.11/7.64	8.14/8.09	7.62/ 7.38
Jul	8.08/7.72	8.20/8.19	7.78/7.64	7.76/7.57	dry	7.54/7.22	8.07/7.70	7.97/7.76	7.54/ 7.22
Aug	7.94/7.58	8.21/8.29	7.92/7.55	7.77/7.45	dry	7.57/7.31	7.93/7.81	7.74/7.82	7.57/-
Sep	7.59/7.90	8.10/8.56	7.61/7.68	7.68/7.53	dry	7.68/8.31	8.00/7.60	7.78/7.98	7.68/-
AAvg	8.11 /7.89	8.27/8.33	7.76/7.69	7.71/7.63	7.73/7.76	7.57/7.52	7.82/7.79	7.93/ <mark>8.01</mark>	7.57/7.52
Norm	(7.72)	(7.93)	(7.82)	(7.59)	(7.92)	(7.64)	(7.84)	(8.03)	(7.62)

a) All pH values are unit-less; monthly values of 8.0 or above are in red, while those at 7.5 or below are in green.

SDRPF - RiverWatch 17 October 2024

b) WY24/WY23 and 20-yr norms are based on averaging monthly results (Oct-Sept).

c) Forester Creek discharges within the Lower Santee Basin section of the river just upstream of Site 11 under the W Hills Pkwy. Bridge.

Table C.4(W) West Section WY24/WY23 Dissolved Oxygen Concentration Data

Site #	1	2	3	4	5	6	7	
Reach		Lower Mis	sion Valley		Upper Mission Valley			
Oct	4.90/3.08	5.07/1.06	4.54//0.39	6.39/0.29	4.06/2.54	1.27/0.27	4.36/4.19	
Nov	4.54/4.21	6.48/2.60	6.07/1.43	6.72/3.50	6.62/5.07	6.37/1.62	7.44/6.17	
Dec	4.90/5.93	6.37/4.94	7.55/3.36	6.22/4.73	7.61/6.38	6.34/2.76	6.42/5.99	
Jan	6.84/7.39	8.17/7.16	7.36/7.20	7.53/7.75	7.45/7.97	6.71/7.65	9.68/9.25	
Feb	6.44/8.26	7.94/9.53	7.73/9.93	7.88/8.66	7.80/9.02	8.37/6.61	8.46/8.67	
Mar	6.50/8.49	6.72/7.54	6.56/7.45	6.91/7.72	6.79/8.21	6.17/8.16	7.64/8.87	
Apr	7.40/7.35	6.98/6.97	7.09/5.64	7.77/6.60	6.77/6.48	7.28/5.90	7.36/6.38	
May	7.27/5.50	5.35/4.70	4.34/4.90	5.34/4.54	4.16/5.55	3.22/4.34	5.74/5.91	
Jun	5.47/5.89	6.53/6.23	4.17/3.84	5.74/5.92	4.92/2.83	4.56/1.44	5.57/5.24	
Jul	6.79/4.34	5.84/4.33	3.61/2.35	4.49/4.44	4.20/2.68	1.02/0.72	3.17/2.08	
Aug	7.88/5.24	5.29/3.70	3.15/2.09	4.19/4.45	3.57/2.64	0.37/1.21	2.41/2.38	
Sep	9.33/3.52	3.40/3.31	0.85/1.79	3.71/2.85	3.60/2.20	0.37/0.88	1.80/2.37	
AAvg	6.52/5.77	6.18/5.17	5.25/ <mark>4.20</mark>	6.07/5.12	5.63/5.13	4.33/3.46	5.84/5.62	
Norm	(6.12)	(4.52)	(4.56)	(5.97)	(4.84)	(3.52)	(5.17)	

d) All values expressed in milligrams/liter and (Percent of Saturation); WY23 and 19-yr averages less than 5 mg/L (DO depletion threshold) shown in red, less than 2.5 mg/L (hypoxic level) cells highlighted in yellow and <1.0 mg/L (exaerobic zone) in pink. DO levels of 7.0 mg/L or greater are shown in blue.

SDRPF - RiverWatch 18 October 2024

Table C.4(ME) Mid and East Section WY24/23 DO Concentration Data

Site	8	9T	10	11	12T	13E	14	15T	13W
Reach	Mission Gorge		Lower Santee Basin		Upper Santee Basin		LSB c	LSB	
Oct	5.51/1.05	8.20/5.48	4.25/0.66	4.48/0.66	4.74/2.88	1.33/0.37	3.79/1.59	4.23/4.07	2.32/1.93
Nov	8.64/10.4	8.74/11.9	6.07/9.14	6.73/9.14	6.44/6.99	6.16/1.21	6.41/2.14	3.93/6.92	5.60/4.36
Dec	9.10/9.77	11.5/10.3	7.99/7.86	7.39/7.86	5.65/6.49	3.01/2.08	6.14/4.53	8.50/7.29	3.50/5.59
Jan	11.4/11.7	13.7/11.1	8.36/7.36	9.26/7.36	9.32/8.06	3.63/3.56	4.71/5.96	7.99/9.46	8.61/4.22
Feb	8.97/13.3	8.58/13.9	7.77/10.3	8.89/10.3	8.70/9.37	8.24/3.56	6.42/8.01	8.43/12.2	7.70/6.54
Mar	9.03/9.95	10.7/10.3	7.47/8.06	7.02/8.06	6.73/9.61	1.54/3.8	11.3/5.9	7.48/9.18	6.57/3.82
Apr	8.74/10.3	8.40/11.4	5.95/6.71	5.90/6.70	5.96/6.56	2.45/2.14	5.78/7.55	7.12/9.15	5.12/1.93
May	7.77/6.83	10.3/8.48	5.89/5.06	6.35/5.06	6.10/9.63	1.01/1.55	3.86/6.21	6.07/4.90	4.87/2.57
Jun	7.09/8.22	9.61/7.86	6.44/7.32	6.20/7.32	6.42/6.62	0.76/2.11	5.84/4.11	7.08/7.61	3.11/2.04
Jul	6.96/6.21	7.67/9.33	5.48/5.31	5.82/5.31	dry	1.03/.04	4.13/1.95	5.88/5.30	2.37/1.94
Aug	6.88/3.47	8.94/5.88	6.33/3.53	5.53/3.53	dry	1.01/0.44	2.87/1.17	6.10/4.63	1.65/dry
Sep	4.18/5.54	9.27/8.55	2.43/4.81	5.13/4.81	dry	1.09/1.15	3.47/2.37	5.84/4.73	1.25/2.26
WY24/23	7.86/8.06	9.62/9.55	6.20/6.34	6.56/6.41	6.67/7.36	2.61/1.92	5.39/4.29	6.55/7.12	4.39/3.38
Norm	(7.27)	(9.28)	(6.86)	(6.13)	(7.07)	(2.72)	(3.65)	(7.21)	(3.77)

a) All values expressed in milligrams/liter; values less than 5 mg/L (DO depletion threshold) are expressed in red, < 2.5 mg/L (hypoxic level) cells highlighted in yellow and < 1 mg/L (exaerobic zone) in pink. DO levels of 7.0 mg/L or greater are shown in blue.

SDRPF - RiverWatch 19 October 2024

b) Tributary discharges within the Lower Santee Basin reach enter the main stream below the west end of Carlton Oaks Golf Course just upstream of SR 67.

Table C.5(W) West Section WY24/WY23 DO Percent Saturation Data

Site #	1	2	3	4	5	6	7	
Reach		Lower Missi	on Valley		Upper Mission Valley			
Oct	55/35	61/12	53/4	75/3	45/29	14/2	50/47	
Nov	47/41	66/25	60/14	66/34	65/47	61/15	72/58	
Dec	47 /55	61/46	74/31	60/44	<mark>72</mark> /57	61/25	61/54	
Jan	63/68	76 /67	68/67	69/72	67/74	61/71	87/85	
Feb	67/80	78/91	77/94	78/82	78/83	82/62	84/80	
Mar	70/87	72/75	70/75	73/76	72/81	64/81	79/88	
Apr	82/78	76/77	78 /60	85/69	73/68	79/62	7 9/67	
May	<mark>82</mark> /62	60/53	49 /59	56/51	46/61	36/49	64/65	
Jun	63/70	77/74	49/46	68/71	57/32	54/17	65/61	
Jul	78/53	70/50	44/29	57/55	49/31	12/9	38/24	
Aug	97/63	63/45	39/25	52/55	42/31	5/14	29/28	
Sept	113/40	42/39	11/21	47/34	41/25	4/10	21/28	
WY24/23	72/61	67/54	56/44	66/54	59/52	44/35	61/57	
Norm	(66.9)	(47.7)	(48.1)	(64.2)	(49.5)	(36.0)	(53.4)	

a) All values expressed as percent of saturation; WY23 results are listed in bold red; otherwise in bold black.

b) WYs 24/23 values < DO depletion threshold (55%) are expressed in red ,< 25% (hypoxic level) cells highlighted in yellow and <10% (exaerobic zone) pink. DO% Sat values of 70% or greater are shown in blue cells.

c) WY24/23 annual average and 20-yr norms are based on averaging of monthly data (Oct-Sept).

Table C.5(M-E) Mid and East Section WY24/WY23 DO Percent Saturation Data

Site	8	9T	10	11	12T	13W	13E	14	15T
Reach	Mission Gorge		Low	Lower Santee Basin			ntee Basin	LSB ^c	
Oct	60/12	84/61	46/8	49/34	54/33	24/21	15/4	43/19	47/46
Nov	85/96	82/103	60/85	66/70	64/66	55/41	60/11	67/22	42 /65
Dec	81/87	98/90	74 /70	68/71	53 /60	47 /51	28/18	59/42	79 /65
Jan	99/109	115/106	73/68	82/65	85/75	70/39	34/34	44 /56	75/88
Feb	86/119	83/122	76/91	85/85	82/84	70/58	82/32	67/75	81/112
Mar	92/97	103/101	77/78	71/76	69/91	66/38	16/36	117/59	79/89
Apr	93/100	89/110	63/68	63/68	64/66	55/19	27/23	62/80	76/92
May	85/74	107/87	64/55	68/65	64/106	43/28	12/17	44/74	67/55
Jun	80/92	104/85	76/81	69/65	64/73	35/22	9/24	68/48	83/98
Jul	81/72	85/100	66/61	67/68	-	27/21	13/12	52/24	70/62
Aug	82/41	101/66	76/42	66/46	-	19/-	12/5	37/15	73/54
Sep	48/64	102/94	28 /55	58/65	-	14/28	13/14	43/28	67/54
WY24/23	81/80	96/94	65/64	68/65	67/73	45/33	27/19	59/ <mark>45</mark>	70/73
Norm	(73.9)	(93.6)	(70.9)	(60.5)	(72.3)	(38.0)	(28.1)	(37.0)	(70.0)

a) All values expressed as percent of saturation; WY24 values < 55% (DO depletion threshold) are expressed in red; < 25% (hypoxic level) cells highlighted in yellow and <10% (exaerobic zone) in dark yellow. DO% Sat values of 70% or greater are shown in blue.

b) All WY24/WY23 annual averages (bold print) are based on averaging of monthly data (Oct-Sept).

c) Forester Ck (15T) discharges within the Lower Santee Basin reach just u/s of Site 11.

Table C.6 WY24 Nutrient (NO3 and PO4) Data

Site#	2	7	11	13W	14	15T
Name	YMCA	ABF	WHP	MPW	MAG AV.	FSTR CK
Section	Mission V	alley Sites		Santee Basin (Eastern Sites)	
Oct	0.1/0.1	0.2/0.2	0.1/0.5	0.0/0.4	0.0/0.5	0.6/0.3
Nov				0.3/0.4		0.8/0.1
Dec	0.0/0.3			0.0/0.4	>3.4/0.0	
Jan				0.0/1.0		0.6/0.3
Feb				0.2/0.5		>3.4/0.1
Mar	0.0/0.1			0.1/0.4		>3.4/0.2
Apr						
May						
Jun	0.0/0.6		0.0/0.0	0.0/0.4		
Jul				0.0/0.4		2.8/0.0
Aug	0.0/0.6			0.1/0.4		2.7/0.1
Sept	0.0/0.3	0.0/0.1		0.0/0.3	0.0/0.2	
Max.	0.1/0.6	0.2/0.2	0.1/0.5	0.3/1.0	>3.4/0.5	>3.4/0.3

a) Nutrient values for nitrate (NO₃, as nitrogen) are in black and phosphate (PO₄, as phosphrous) in red; both are expressed in mg/L. Comperable site values have been measured in previous years. The natural background level of nitrate in surface water is typically less than 1.0 mg/L while natural levels of phosphate usually range from 0.005 to 0.05 mg/L.

SDRPF - RiverWatch 22 October 2024

Appendix D

Water Quality Index Values


The Lower San Diego River (LSDR) Water Quality Index (WQI) has been developed to present a simple and concise expression of monitored physical-chemical and bacteriological water quality data compiled by the SDRPF RiverWatch Team on a monthly basis. The index is intended to aid in assessment of the lower river, primarily for multiple non-body contact recreational uses and overall environmental enhancement within the watershed. As designed, the metrics constitute a means to compare averages, variances and trends in normalized values over time (temporally) and by relative location (spatially) within the watershed. The index allows individuals to interpret large amounts of aggregated data and relate overall water quality variations to changes, be they from natural causes or anthropogenic impairments. The WQI has been used to identify basic water quality trends over the past 20 years of monitoring and single out potential problem areas within the lower watershed. Such patterns and specific locations can then screened and evaluated in greater detail through direct observation of pertinent site-specific data by various public agencies and organizations entrusted with protection and enhancement of river water quality. Used in this manner, the index provides a further metric for evaluating effectiveness of many of the San Diego River improvement programs and may also be of support to agencies and organizations responsible in reformulating priorities or updating specific policies.

Running average WQI values from WY05 through WY24 are expressed by river section and reach on **Charts D.1 and D.2**, respectively. The overall variance in *temporal* WQI values and streamflow are expressed on **Chart D.3**. The variances in *spacial* index values for all lower river monitoring sites are presented on **Chart D.4**.

Chart D.1 provides the range (max.-green, min.-red) in monthly values, the running averages by river section as well as monthly streamflow (blue bars) over the 20-yr period (WY05-WY24) of water quality monitoring. The positive correlation in seasonal fluctuation between streamflow and water quality values is apparent. Poorer water quality at all sections occur during years of below average discharge. The overall change in the index over time are shown as a dashed lines. General declines experienced during the first decade were countered by recovery during the second. The current running average index of 40 is 21% above the 20-yr norm of 33. The highest index of 41 in WY05 was 24% above norm. The lowest running average index value of 21 occuring in Nov. '04 was 37% below the current norm.

Chart D.2 presents overall (LSDR) monthly running avearge WQI values (heavy black lines) over the past 20 years. Seasonal patterns expressed in monthly results and trends described by running averages in values are apparent for each reach of the river. The water quality fluctuations over time in individual reaches, sections and the overall LSDR flow-weaighted values expressed on both a running average and seasonal cycle basis can be observed. The Upper Santee Basin (USB) reach (red line, sites 13&14) have presented the lowest index values since March of 2010. The Mission Gorge portion (blue line, mid-section of the lower river watershed) consistently presents the highest values. As shown on both charts, the greatest rate of decline in lower river water quality occured over a 36 month period (WY12 through early WY15) during well-below normal streamflow brought about by prolonged drought conditions.

SDRPF - RiverWatch 23 October 2024

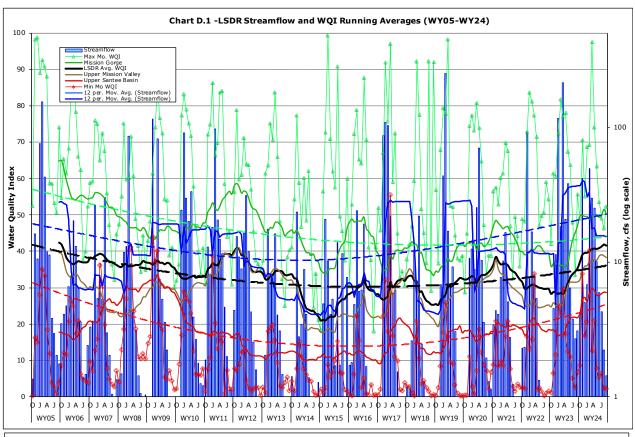


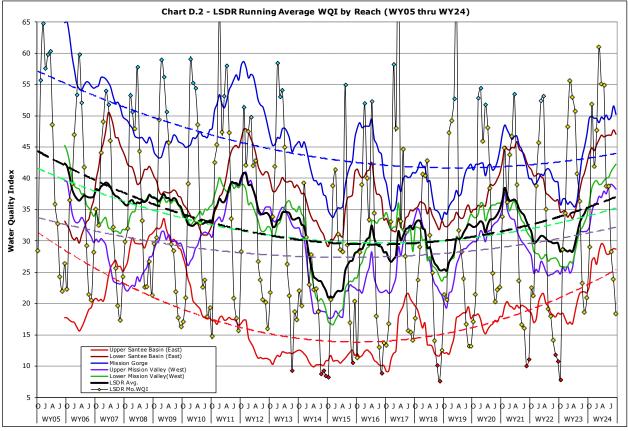



Chart D.3 presents a temporal summary of variances in the water quality index values profiled on a monthly, seasonal and average annual water year basis for the five reaches of the river and overall. Variances in the index can be visually compared to changes in 3-day streamflow (blue bars) expressed on the same timelines. Positive correlations are evident, i.e., increased average daily flow and higher water quality values. Low-flows extending throughout the summer and early fall months result in significantly poorer water quality. In year's of above average dry-weather (base) flows, improvements in index values for each of the five reaches and overall (heavy black line) of the lower river system occur. Irrespective of water year, the Mission Gorge reach (blue curve) has presented the highest WQI values while the Upper Santee Basin reach (red curve) has (with exception of WY08/09) carried lowest values. The second poorest water quality reach is Upper Mission Valley (green curve). The second best reach is Lower Santee Basin (brown curve). On a seasonal basis autumn and summer values are consistantly lower than winter (highest) and spring (second highest) values for all reaches and overall. August is typically the month of lowest water quality and lowest streamflow. January and March are typically the months of best water quality for all reaches. Larger flood flows, often occuring in February, typically depress WQI values by several points comparred to the other three winter months.

Chart D.4 provides a *spatial* profile of average annual WQI by river monitoring site, reach and section for this year (WY23), compared to last year (WY21), the best (WY05), the worst (WY14) and the 19-yr winter (Dec-Jan), summer (Jun-Sept) and annual (Oct-Sept) norms. The sites are shown from left-to-right in the order they occur ascending upstream. The current (WY24) average annual WQI values for each site, shown as both a heavy black line and as colored bars, are above norms (dashed color bars) at all but sites 13e/13w (Walmart Pond/Mast Park W). that present the poorest overall WQI values. Site 7 (Kaiser Pond Outfall) in Upper Mission Valley reach also continues to present poor index values. The Mission Gorge portion (sites 8-10) of the lower river continues to demonstrate best overall water quality. The 20-yr winter (dashed blue) and summer (dashed red) WQI norms are also shown in spacial profile in order to provide basic understanding of the range in index values occuring throughout the lower river system extending from Lakeside to the estuary in lower Mission Valley.

Monthly and running average WQI values for each reach of the lower river and overall are presented in Section 5 of the WY24 Annual WQM Report (Charts 5.1-5.6) together with a brief discussion of the individual trends associated with each. It is apparent that some reaches of the river experience water quality changes more rapidly than others and that several sites represent "hotspots" of continued poorer quality waters that are less suseptable to changes in ambient conditions. The general trends in varience from the overall LSDR norms for each of the water quality metrics by river reach are also presented in Appendix F (Charts F.1-F.6).

SDRPF - RiverWatch 25 October 2024

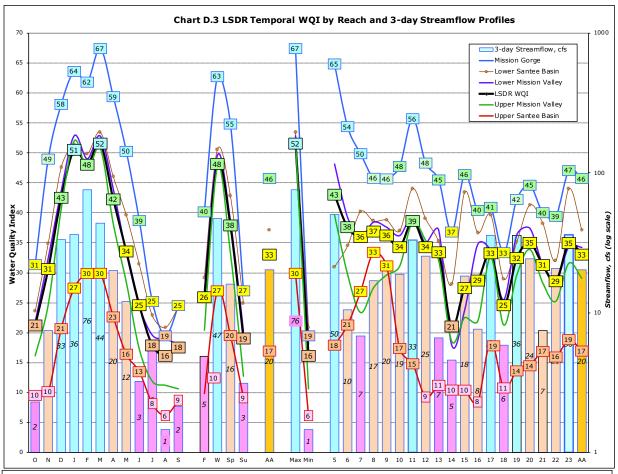

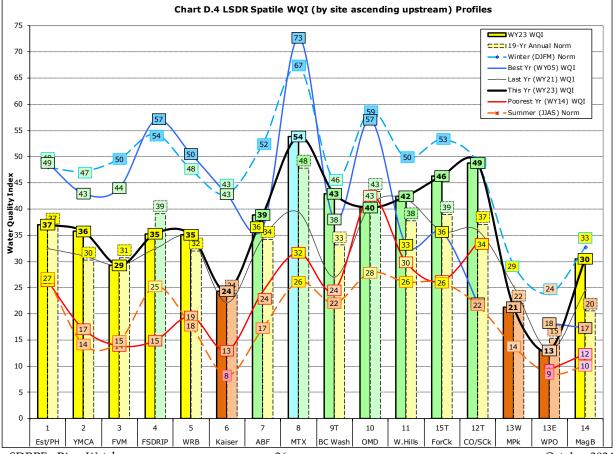

Appendix G - San Diego RiverWatch WQM Team Members

Supervision/Coordination: Rob Hutsel ('04-05), Kym Hunter ('06-07), Shannon Quigley-Raymond ('08-19), Lisa Schiavinato, Natasha Rodriguez, Aixa Willoughby ('20-21), Sarah Hutchmacher ('21-23), Kristofer Gonzalez ('24)

Appendix H - Glossary

Abreviations:

```
AADF - Average Annual Daily Flow
ACC - Average Coliform Count (arithmetic mean of fecal
coliform, e-Coli & total coliform in MPN/100mL)
ADWF - Average Daily (stream) Dry-Weather Flow
AFY - acre-feet per year
Avg-Average
cfs - cubic feet per second (stream flow/discharge)
Ck - Creek
CY - Calendar Year (Jan 1 - Dec 31)
DO - Dissolved Oxygen
DOD- Dissolved Oxygen Depletion (level below
minimum required)
DO%Sat - Dissolved Oxygen expressed as percentage of
DO level at Saturation Point
d/s - downstream // \{u/s - upstream\}
E - East // \{W - West\}
FSDRIP - First San Diego River Improvement Project
ft. – feet // {mi. - mile}
gal - gallon
Ln(x) - natural logarithm of (x) to base-e (2.718)
log(x) - common logarithm of (x) to base-10
L//U – lower//upper (as in river reaches)
LSDR - Lower San Diego River
max//min – maximum//minimum
MCC - Mean Coliform Count (geometric mean of fecal
coliform, e-Coli & total coliform in MPN/100mL)
mg/L – milligrams per litre
mS/cm - milliSeimens per centimetre
         (1 \text{ mS/cm} = 1,000 \text{ uS/cm})
MG – Mission Gorge (mid-section of LSDR)
MV – Mission Valley (West section of LSDR)
MPN - Most Probable Number (of coliform organisms)
SB – Santee Basin (East section of LSDR)
PDMWD - Padre Dam Municipal Water District
pH - measure of acidity or basicity (decimal logarithm of
         hydrogen ion activity)
ppm - parts per million
Q - stream flow or discharge
SB - Santee Basin
SpC - Specific Conductance (also Conductivity
sometimes abbreviated SC)
SDRPF - San Diego River Park Foundation
TDS - Total Dissolved Solids
Temp. – Water Temperature
TN/TP – Total Nitrogen/ Total Phosphorus (nutrients)
USGS - U.S. Geological Survey
uS/cm -microSeimens per centimeter
          (1 \text{ uS/cm} = 0.001 \text{ mS/cm})
u/s - upstream // {d/s - downstream}
W - West // {E - East}
WQI - Water Quality Index (WQIa)
WQI(4) - WQI using 4 parameters (current)
WQI(6) - WQI using 6 parameters (early yrs)
WY – Water Year (Oct 1 – Sept 31)
% - percent
%Sat - percent of DO saturation value
C – degrees Celsius \circ C = (\circ F-32)*5/9
^{\circ}F – degrees Fahrenheit ^{\circ}F = (^{\circ}C*9/5) + 32
Flow (cfs) = Velocity (ft/sec)*Cross-sectional area (sqft)
```

```
Constituent Load (lbs/day) = Q \text{ (mgd)*Concentration} (ppm)*8.34; or Q \text{ (cfs)*Concentration (mg/L)*5.39} where Q \text{ is streamflow/river discharge.}
```

Total Dissolved Solids (TDS in mg/L) = 670*Specific Conductance, (where SpC is in mS/cm). An approximate relationship for LSDR watershed; other variables (e.g., temperature, pressure, specific ions) are considered negligible).

```
DO/DO%Sat relationship is defined by the following polynomial equation:
DO(mg/L)=DO%Sat*[0.004*T²-0.343*T+14.2]/100;
DO%Sat = DO(mg/L)*100/[0.004*
T²-0.343T+14.2],
where T = temperature is in °C.
Other variables, incl. barometric pressure, elevation and conductivity (SpC), have negligible impact on the DO-DO%Sat relationship within the LSDR watershed.
```

SDR Water Quality Index (WQI) is calculated using the following set of equations:

```
\label{eq:wql4} WQl4 = DO\%Sat*2.5*T factor*Q factor/log(SpC); where SpC is expressed in $uS/cm$; the T factor = <math>0.0055T^3-0.163T^2+1.37T-2.5, and the Q factor = 0.56+0.173LnQ-0.002LnQ^2-0.0033LnQ^3 (M Valley); 0.72+0.15LnQ-0.0051LnQ^2-0.004LnQ^3 (M Gorge); 0.87+0.107LnQ-0.018LnQ^2-0.003LnQ^3 (Santee); 0.1+0.05LnQ-0.042LnQ^2-0.0011LnQ^3 (tributaries)
```

 $\begin{array}{l} WQI_6=Avg.[DO\%f^*wt_{(DO)},SpCf^*wt_{(SC)},\\ pHf^*wt_{(pH)},MCCf^*wt_{(MCC)},Qf^*wt_{(Q)},Tempf^*wt_{(T)}]^{\wedge}1.75\\ where~wt_{(DO)}=3,wt_{(SC)}=2,wt_{(pH)}=1,wt_{(MCC)}=1,wt_{(Q)}\\ =2~and~wt_{(T)}=1~(formula~discontinued~in~WY08) \end{array}$

The LSDR WQI was specifically developed for the RiverWatch Monitoring Program, however, the equations can also be applied to water quality and hydrologic data for other inland watercourses where metrics are available.

Water Equivalents:

```
1 cf = 7.48 gal = 62.4 lbs of water

1 AF = 43,560 cf = 325,900 gal

1 psi = 2.31 ft of water (head)

1 mg/L = 1 ppm (in water)

1 cfs = 450 gpm = 0.646 mgd = 1.98 AF/day = 724

AFY

1 mgd = 694 gpm = 1.547 cfs = 3.06 AF/day =

1,120 AFY

1,000 gpm = 1.436 mgd = 2.23 cfs = 4.42 AF/d =

1,614 AFY

1 inch (rainfall) = 25.4 mm
```

SDRPF - RiverWatch 28 October 2024

Appendix I - References

- 1. The Role of the San Diego River in Development of Mission Valley, Nan Papageorge, The Journal of San Diego History (Vol. 17, No. 2), Spring 1971
- 2. Evaluation of the Mission, Santee, and Tijuana Hydrologic Subareas for Reclaimed-Water Use, San Diego County, CA, John Izbicki, USGS Water Resources Investigations Report 85-4032, 1985
- 3. Water Quality Control Plan for the San Diego Basin, San Diego RWQCB, 1994
- 4. Waste Discharge and Water Recycling Requirements for the Production and Purveyance of Recycled Water, Padre Dam Municipal Water District (PDMWD), San Diego County, San Diego RWQCB, 1997
- 5. *Groundwater Report*, San Diego County Water Authority (SDCWA), 1997
- 6. Waste Discharge Requirements for PDMWD Padre Dam Water Recycling Facility, Discharge to Sycamore Creek and the San Diego River, San Diego County, San Diego RWQCB Order No. 98-60 (NPDES No. CA010749), 1998
- 7. Modification of Water Quality Order 99-08-DWQ State Water Resources Control Board (SWRCB) National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction Activity, San Diego RWQCB Resolution No. 2001-046, 2001
- 8. General Waste Discharge Requirements for Groundwater Extraction Waste Discharges from Construction, Remediation, and Permanent Groundwater Extraction Projects to Surface Water within the San Diego Region except for San Diego Bay. San Diego RWQCB, Order No 2001-96 (NPDES No. CAG919002), 2001

- 9. San Diego River Watershed Urban Runoff
 Management Plan, City of San Diego in
 conjunction with Cities of El Cajon, La Mesa,
 Santee, Poway and County of San Diego, 2001
- 10. Waste Discharge Requirements for Discharge of Urban Runoff from Municipal Separate Storm Sewer Systems (MS4) Draining the Watersheds of the County of San Diego, the Incorporated Cities of San Diego County, and the San Diego Unified Port District, San Diego Regional Water Quality Control Board (RWQCB) Order No 2001-01 (NPDES No. CAS0108758), 2001
- 11. General Waste Discharge Requirements for Discharges of Hydrostatic Test Water and Potable Water to Surface Waters and Storm Drains or Other Conveyance Systems, San Diego Region, San Diego RWQCB, 2002
- 12. San Diego River Watershed Urban Runoff
 Management Plan, City of San Diego Lead
 Agency, City of Santee, City of Poway, County of
 San Diego, Jan 2003
- 13. *Watershed Sanitary Survey,* City of San Diego Water Department, Jan 2001, rev. May 2003
- Clean Water Action Plan and Status Report,
 County San Diego Project Clean Water, June 2003
- 15. San Diego River Watershed Water Quality Report, Anchor Environmental & others, Oct 2003
- 16. San Diego River Watershed Management Plan Final Water Managment Plan, Anchor Environmental and others, SDR Watershed Work Group, March 2005
- 17. 2005 Watershed Sanitary Survey Volume 2 San Diego River System, City of San Diego Water Department, Water Quality Laboratory, Aug 2005

SDRPF - RiverWatch 29 October 2024

Appendix I (continued) References

- 18. San Diego River
- Baseline Sediment Investigation Final Report, City of San Diego, Weston Solutions, Oct. 2005
- 19. Monitoring Workplan for the Assessment of Trash in San Diego County Watersheds, (Weston Solutions Brown & Caldwell), County of San Diego, Aug 2007
- 20. San Diego Integrated Regional Water Management Plan, San Diego County Water Authority, City of San Diego and County of San Diego, Oct 2007
- 21. Allopathic potential of two invasive alien Ludwig spp, Dandelot et. al., Elsevier Aquatic Botany 88 (4):311-316, Dec 8, 2007
- 22. Surface Water Ambient Monitoring Program (SWAMP) Report on the San Diego Hydrologic Unit, Final Technical Report 2007, Southern California Coastal Water Research Project, San Diego RWQCB, Jan 2008
- 23. San Diego River Watershed Urban Runoff Management Plan, City of San Diego, Storm Water Pollution Prevention Division, TRC, March 2008
- 24. *There is No San Diego River,* Bill Manson, San Diego Weekly Reader, Oct 22, 2008
- 25. The Ecological and Hydrological Significance of Ephemeral and Intermittent Streams in the Arid and Semi-arid American Southwest, EPA/660/R-08/134, Nov. 2008
- 26. Water, The Epic Struggle for Wealth, Power, and Civilization, Steven Solomon, Harper, 2010
- 27.San Diego River FY 2008-2009 WURMP Annual Report, TRC, January 2010
- 28. San Diego River Tributary Canyons Project Final Feasibility Report, April 2010
- 29. The invasive water primrose Ludwigia grandiflora in Germany: First record and ecological risk assessment,

- Nehring & Kolthoff,
- Agency for Nature Conservation, Germany, Aquatic Invasions 2011 REABIC (Vol 6, i1: 83-89) Dec 16, 2010
- 30. Guidelines for Citizen Monitors, SWAMP Clean Water Team Citizen Monitoring Program Guidance Compendium, SWRCB website (10/5/11 update)
- 31. 2011 Long-Term Effectiveness Assessment, San Diego Stormwater Co-permittees Urban Runoff Management Programs, Final Report, Walker Assoc. Weston Solutions, June 2011
- 32. San Diego River Conservancy 2012 Work Plan, Governing Board, March, 2012
- 33. The Day the San Diego River Was Saved:The History of Floods and Floodplain Planning in Mission Valley, Philip R. Pryde, Journal of San Diego History, (Vol. 57, No. 3) 2012
- 34. San Diego River Watershed Bioassessment and Fish Tissue Analysis, RWQCB, Feb. 2013
- 35. San Diego River Park Master Plan, City of San Diego, April 18, 2013
- 36. Watershed Asset Management Plan, Final Report, Storm Water Division, Transportation and Storm Water Department, City of San Diego, July 19, 2013
- 37. San Diego River Watershed Comprehensive Load Reduction Plan - Phase II, Tetra Tech Inc, Final July 24, 2013
- 38. Aquatic Conservation: Marine and Freshwater Ecosystems, A success story: water primroses, aquatic pests, Thouvenot, Haury & Thiebaut, (Vol 23, i5: 790-803) Oct. 2013
- 39. San Diego River Restoration Involves Clearing Homeless, And Their Trash, Susan Murphy, KPBS, Jan. 16, 2014

Appendix I (continued) References

- 40. San Diego River Watershed Monitoring and Assessment Program, B. Bernstein (SWAMP-MR-RB9-2014-0001), RWQCB, Jan. 20, 2014
- 41. Nonstructural Non-Modeled Activity Pollutant Load Reduction Research - Addendum Final, HDR, City of San Diego, Nov. 5, 2014
- 42. San Diego River Causal Assessment Case Study, Appendix C, Causal Assessment Evaluation and Guidance for CA, SCCWRP Tech Rpt. 750, April 2015
- 43. Lower San Diego River Dissolved Oxygen Levels, SDRPF RiverWatch TM. J.C. Kennedy,, June 19, 2015
- 44. Lower San Diego River Streamflow and Water Quality Metrics, J.C. Kennedy, SDR Coalition presentation, Aug. 21, 2015
- 45. San Diego River Watershed Management Area Water Quality Improvement Plan, Walker Assoc. & Walker Assoc. & AMEC, San Diego RWQCB, September 2015
- 46. Analysis of Anionic Contribution to Total
 Dissolved Solids in the Lower San Diego River, Janae
 Fried, SDSU Thesis (Geological Sciences), Fall
 2015
- 47. San Diego River Watershed Management Area Water Quality Improvement Plan, L. Walker & Assoc., January 2016
- 48. Water Quality Analysis for San Diego Trail Carlton Oaks Golf Course Segment, Cities of San Diego and Santee CA, Nasland Eng. for SANDAG, Dec 21, 2016
- 49. Application of regional flow-ecology relationships: ELOHA framework in the San Diego River watershed. E.D Stein SCCWRP Research Article, DOI: Ecohydrology e1869, April 2017

- 50. Regional Assessment of Human Fecal
 Contamination in Southern California Coastal
 Drainages, SCCWRP #0999, International Journal
 Env.Research & Public Health, Aug. 2017
- 51. San Diego Region Bacteria TMDL Cost-Benefit Analysis, Final Report, RWQCB, Oct. 2017
- 52. Increased Homeless Population Along San Diego River Hampers Water Quality, KPBS, Erik Anderson, Nov. 28, 2017
- 53. Interim Report, 2017 Field Season LSDR Aeration Project, SDSU, Trent Biggs, Feb. 2018
- 53. San Diego River Watershed Management Area Water Quality Improvement Plan (SDRWQIP), Project Clean Water, March 14, 2018
- 54. Background WQ Analytics on the Upper FSRRIP Channel, Hydrology and Water Quality, SDRPF, TSM1.18, J.C. Kennedy, Jan. 2018
- 55. SDSU Mission Valley Campus Master PLan EIR, Chapter 4.9 Hydrology & Water Quality, SDSU, Rick Eng./Geosyntec, Jan. 2020
- 56. Lower San Diego River Exotic Weed Mapping Report, SDRPF, 2020
- 57. Dissolved Oxygen Levels at Mast Park East. RiverWatch WQTM1.20, J. Kennedy & G. Strawn, May 2020
- 58. Lower San Diego River Annual Water Quality Monitoring Reports: 2004-2022, SDRPF RiverWatch, J. Kennedy and volunteer monitoring team members.
- 59. Monthly Water Quality Monitiring Reports: Lower San Diego River, SDRPF RiverWatch, Oct. 2004 through Sept. 2023.
- 60. State of the San Diego River 2020 Report, SDRPF, www.sandiegoriver.org/SDR Online Information Center

SDRPF - RiverWatch 31 October 2024

Table E.1 - RiverWatch WQM Data Summary - WY20											
Section	Mission	Valley	Mission Gorge	Santee	Basin	Watershed					
Sites	1-4	5-7	8-10	11,15T,12T	13W,13E,14	all (1-15)					
Reach	LMV	UMV	MG	LSB USB		LSDR (a)					
Annual (October	2019 - Septem	ber 2020):									
ADF, cfs	49 (30)	46 (28)	26 (19) ^(b)	21 (16)	9.3 (5.0)	30 (20)					
Temp, ∘C	19.9 (19.4)	18.5 (17.9)	17.3 (17.1)	17.5 (17.4)	18.2 (18.1)	18.4 (18.0)					
SpC, mS/cm	2.63 (2.58)	2.46 (2.55)	2.09 (2.28)	2.07 (2.25)	1.52 (1.78)	2.15 (2.28)					
DO, mg/L	5.52 (5.06)	3.73 (4.44)	7.50 (7.49)	6.50 (6.54)	2.33 (2.99)	5.01 (4.98)					
DO %of Sat.	60 (54)	38 (46)	77 (77)	67 (64)	25 (31)	53 (51)					
WQIa	37 D+ (35)	34 D (30)	45 C (46)	41 C (37)	15 E (17)	32 D (31)					
WY20 Grade	Marginal	Marginal	Fair	Fair	Poor	Marginal					
Summer Period	Summer Period (June 2020 - September 2020):										
ADF, cfs	3.4 (3.2)	3.2 (2.9)	2.9 (1.9) ^(c)	2.8 (1.8)	1.1 (0.4)	2.7 (2.1)					
Temp, ∘C	25.5 (24.3)	23.6 (21.9)	22.2 (21.8)	21.6 (21.5)	23.7 (22.9)	23.5 (22.6)					
SpC, mS/cm	3.32 (3.25)	3.09 (3.17)	2.39 (2.86)	2.07 (2.25)	1.52 (1.78)	2.61 (2.78)					
DO, mg/L	4.24 (3.22)	2.88 (2.51)	3.90 (5.58)	6.66 (5.62)	2.13 (2.13)	3.95 (3.42)					
DO % of Sat.	52 (39)	34 (29)	42 (61)	76/(64)	26 (25)	47 (39)					
WQI	25 D- (20.5)	17 E (14.5)	30 D (27.5)	29 D (24.4)	10 F (9.2)	21 E (18.0)					
WY20 Grade	Marginal	Poor	Marginal	Marginal	Very Poor	Poor					
Winter Period (D	ecember 2019-	- March 2020):									
ADF, cfs	27 (68)	25 (62)	16 (43)	14 (36)	5.8 (11)	17 (45)					
Temp, ∘C	14.6 (14.5)	14.1 (13.7)	12.7 (12.7)	13.3 (13.4)	13.2 (13.6)	13.8 (13.6)					
SpC, mS/cm	1.86 (1.84)	1.75 (1.76)	1.76 (1.63)	1.75 (1.81)	1.24 (1.44)	1.64 (1.67)					
DO, mg/L	7.59 (6.91)	7.84 (6.57)	9.64 (9.16)	8.24 (7.92)	2.75 (3.94)	5.46 (6.46)					
DO % of Sat.	74 (68)	76 (64)	92 (87)	79 (73)	27 (37)	53 (62)					
WQI	54 <mark>B</mark> (50)	57 B (48)	63 B (63)	54 <mark>B</mark> (50)	19 E (27)	47 C (46)					
WY20 Grade	Good	Good	Good	Good	Poor	Fair					

Table E.2 - RiverWatch WQM Data Summary - WY21										
Section	Ν	lission Valle	у	Mission Gorge	Santee	Basin	All			
Sites	1-3	4, 5	6-7	8-10	11,15T,12T	13W,13E,14	(1-15)			
Reach	LMV	MMV	UMV	MG	LSB	USB	LSDR (a)			
Annual (Octob	er 2020 - Sept	ember 2021)	:							
ADF, cfs	12 (30)	12 (30)	11 (29)	8 (19) (b)	7 (17)	3.1 (7)	8 (21)			
Temp, °C	19.0 (19.4)	18.5 (18.6)	17.7 (17.9)	15.7 (17.0)	16.3 (17.4)	17.6 (18.1)	17.2 (17.9)			
SpC, mS/cm	2.95 (2.61)	2.90 (2.58)	2.82 (2.56)	2.30 (2.28)	2.27 (2.25)	1.87 (1.78)	2.51 (2.35)			
DO, mg/L	4.79 (5.04)	4.74 (4.76)	4.69 (4.49)	7.29 (7.47)	6.52 (6.54)	3.16 (3.00)	5.41 (5.43)			
DO %of Sat.	50 (53)	49 (50)	48 (46)	72 (76)	65 (65)	33 (31)	51 (51)			
WQI	31 D (35)	33 D (36)	28 D (29)	40 C (46)	38 C (37)	17 E (17)	31 D (32)			
Summer Perio	d (June 2021 -	September	2021):							
ADF, cfs	1.3 (3.4)	1.3 (3.3)	1.2 (3.2)	0.9 (2.0) (c)	0.9 (1.9)	0.3 (0.7)	1.0 (2.2)			
Temp, ∘C	24.3 (24.3)	23.1 (23.0)	22.0 (22.0)	21.8 (21.8)	20.9 (21.5)	23.4 (22.9)	22.4 (22.4)			
SpC, mS/cm	3.70 (3.28)	3.60 (3.22)	3.49 (3.19)	2.81 (2.85)	2.70 (2.64)	2.10 (2.01)	3.05 (2.87)			
DO, mg/L	2.70 (3.19)	2.51 (2.85)	2.32 (2.51)	4.17 (5.50)	3.79 (5.18)	2.44 (2.15)	3.09 (3.75)			
DO % of Sat.	32 (38)	29 (33)	27 (29)	48 (63)	43 (56)	31 (25)	35 (39)			
WQI	14 E- (20)	16 E (21)	10 F (13)	14 E- (27)	18 E (24)	10 F (9)	13 E- (18)			
Winter Period	(December 20	20 - March 2	2021):							
ADF, cfs	28 (70)	27 (68)	26 (66)	18 (44)	16 (38)	7 (17)	19 (47)			
Temp, ∘C	13.6 (14.4)	13.5 (14.1)	13.2 (13.7)	10.1 (12.5)	11.9 (13.3)	12.0 (13.5)	12.2 (13.5)			
SpC, mS/cm	2.16 (1.86)	2.10 (1.82)	1.99 (1.77)	1.81 (1.64)	1.86 (1.81)	1.61 (1.45)	1.91 (1.73)			
DO, mg/L	7.04 (6.91)	6.90 (6.75)	6.76 (6.58)	9.69 (9.19)	8.40 (7.95)	3.40 (3.90)	7.31 (7.11)			
DO % of Sat.	69 (68)	67 (66)	65 (64)	87 (87)	78 (73)	32 (37)	62 (63)			
WQI	47 C (50)	48 C (51)	44 C (48)	58 B (63)	50 B- (50)	20 E (27)	44 C (47)			

	Table E.3 - RiverWatch WQM Data Summary - WY22										
Section	Ν	lission Valle	y	Mission Gorge	Santee	Basin	All				
Sites	1-3	4, 5	6-7	8-10	11,15T,12T	13W,13E,14	(1-15)				
Reach	LMV	MMV	UMV	MG	LSB	USB	LSDR (a)				
Annual (Octob	er 2021 - Sept	ember 2022)	:								
ADF, cfs	15 (27)	15 (26)	14 (25)	8.6 (18) (b)	7.0 (16)	3.1 (7)	9.7 (19)				
Temp, ∘C	19.2 (19.1)	18.3 (18.4)	18.4 (18.2)	16.9 (16.4)	17.1 (16.7)	18.5 (18.0)	17.9 (17.7)				
SpC, mS/cm	2.61 (2.62)	2.80 (2.56)	2.71 (2.55)	2.41 (2.25)	2.27 (2.24)	1.83 (1.72)	2.41 (2.27)				
DO, mg/L	3.57 (4.48)	4.77 (5.40)	3.74 (4.29)	6.12 (7.05)	5.90 (6.09)	3.27 (3.11)	4.65 (5.10)				
DO %of Sat.	38 (47)	51 (57)	39 (44)	6 2 (72)	61 (60)	34 (32)	48 (52)				
WQI	29 D+ (34)	31 D+ (36)	25 D (29)	39 C (46)	32 C (37)	16 E (17)	29 D (33)				
Summer Perio	d (June 2022 -	September	2022):								
ADF, cfs	1.9 (3.0)	1.9 (3.0)	1.8 (2.9)	0.9 (2.0) (c)	0.6 (1.8)	0.2 (0.7)	1.1 (2.0)				
Temp, ∘C	23.8 (23.7)	22.8 (22.8)	22.8 (22.6)	21.3 (20.8)	21.6 (20.6)	23.9 (22.8)	22.6 (22.1)				
SpC, mS/cm	3.52 (3.33)	3.20 (3.17)	3.09 (3.15)	2.47 (2.43)	2.61 (2.64)	1.99 (1.93)	2.71 (2.68)				
DO, mg/L	1.78 (2.45)	3.87 (3.83)	2.30 (2.23)	1.74 (4.68)	3.79 (5.18)	2.44 (2.15)	2.64 (3.45)				
DO % of Sat.	22 (29)	47 (45)	28 (26)	21 (54)	43 (56)	31 (25)	31 (39)				
WQI	17 E (20)	20 E (21)	12 F+ (13)	8 F (26)	19 E (24)	7 F (9)	13 E- (19)				
Winter Period	(December 20	21 - March 2	2022):								
ADF, cfs	36 (69)	34 (65)	32 (62)	19 (43)	16 (37)	7.1 (17)	22 (45)				
Temp, °C	15.0 (14.4)	14.5 (14.0)	14.6 (13.8)	12.8 (12.1)	12.9 (12.9)	13.6 (13.5)	13.7 (13.3)				
SpC, mS/cm	1.94 (1.85)	1.81 (1.80)	1.80 (1.76)	2.32 (2.02)	1.84 (1.74)	1.61 (1.42)	1.88 (1.75)				
DO, mg/L	6.10 (6.62)	6.87 (7.09)	6.76 (6.58)	9.16 (9.11)	8.40 (7.95)	3.40 (3.90)	7.18 (6.79)				
DO % of Sat.	61 (66)	68 (69)	66 (65)	87 (87)	78 (73)	32 (37)	70 (65)				
WQI	47 C (49)	50 C (51)	37 D+(42)	58 B (60)	40 C (47)	25 D-(23)	41 C (44)				

	Table	E.4 - River	Watch WQN	M Data Sun	nmary - WY	23	
Section	N	Iission Valle	y	Mission Gorge	Santee	Basin	All
Sites	1-3	4, 5	6-7	8-10	11,15T,12T	13W,13E,14	(1-15)
Reach	LMV	MMV	UMV	MG	LSB	USB	LSDR (a)
Annual (Octob	er 2022 - Sept	ember 2023)	:				
ADF, cfs	62 (29)	60 (28.5)	59 (28)	46 (20) (b)	42 (17)	19 (8)	45.2 (20.5)
Temp, ∘C	18.1 (19.0)	17.6 (18.4)	17.5 (18.2)	15.6 (16.4)	16.3 (16.7)	17.8 (18.0)	17.0 (17.6)
SpC, mS/cm	2.61 (2.62)	2.80 (2.56)	2.71 (2.55)	2.03 (2.27)	2.09 (2.24)	1.46 (1.76)	1.99 (2.28)
DO, mg/L	4.69 (4.49)	5.13 (5.38)	4.54 (4.30)	7.20 (7.05)	6.41 (6.11)	3.10 (3.11)	5.22 (5.11)
DO %of Sat.	49 (47)	53 (57)	46 (44)	72 (72)	65 (64)	32 (31)	53 (52)
WQI	34 D (34)	35 D (36)	32 D (29)	47 C (46)	44 C (37)	19 E (17)	35 D (33)
Summer Perio	d (June 2023 -	September	2023):	•			
ADF, cfs	19.7 (3.9)	19.4 (3.8)	18.9 (3.7)	11.7 (2.4)	9.6 (2.2)	4.3 (0.9)	12.8 (2.6)
Temp, ∘C	23.8 (23.7)	22.8 (22.8)	22.8 (22.6)	21.3 (20.8)	21.6 (20.6)	23.9 (22.8)	22.6 (22.1)
SpC, mS/cm	3.52 (3.33)	3.20 (3.17)	2.14 (2,70)	2.47 (2.43)	2.61 (2.64)	1.99 (1.93)	2.71 (2.68)
DO, mg/L	3.45 (2.50)	3.50 (3.82)	2.04 (2.23)	5.55 (4.72)	5.39 (4.80)	1.79 (2.18)	3.69 (3.46)
DO % of Sat.	41 (30)	42 (45)	24 (26)	64 (55)	61 (52)	21 (26)	43 (40)
WQI	27 D (20)	24 E+ (21)	15 E (13)	39 C- (27)	37 D+ (25)	10 F (9)	14 E- (19)
Winter Period	(December 20	22 - March 2	2023):				
ADF, cfs	117 (68)	115 (66.5)	113 (65)	98 (45)	93 (40)	42 (18)	92 (47)
Temp, ∘C	12.6 (14.3)	12.1 (13.9)	12.0 (13.8)	11.2 (12.1)	11.7 (12.8)	12.1 (13.4)	11.9 (13.3)
SpC, mS/cm	1.94 (1.85)	1.81 (1.80)	1.55 (1.64)	2.32 (2.02)	1.84 (1.74)	1.61 (1.42)	1.88 (1.75)
DO, mg/L	7.14 (6.65)	7. 55 (7.11)	7.24 (6.54)	9.78 (9.14)	8.40 (7.95)	4.68 (4.21)	7.18 (6.79)
DO % of Sat.	68 (65)	71 (70)	68 (63)	90 (87)	78 (73)	44 (40)	70 (65)
WQI	47 C (50)	49 C+ (51)	48 C+ (48)	60 B (63)	56 B (50)	30 D (27)	48 C (47)

	Table	E.5 - River	·Watch WQN	M Data Sun	ımary - WY	′24	
Section	N	lission Valle	y	Mission Gorge	Santee	Basin	All
Sites	1-3	4, 5	6-7	8-10	11,15T,12T	13W,13E,14	(1-15)
Reach	LMV	MMV	UMV	MG	LSB	USB	LSDR (a)
Annual (Octob	er 2023 - Sept	ember 2024)	:				
ADF, cfs	48 (30)	47 (29)	46 (28)	33 (20) (b)	30 (18)	12 (7.5)	34 (21)
Temp, ∘C	19.4 (19.3)	18.7 (18.4)	18.4 (17.9)	17.4 (17.5)	17.4 (17.3)	18.7 (18.1)	18.1 (17.9)
SpC, mS/cm	2.61 (2.62)	2.80 (2.56)	2.71 (2.55)	2.03 (2.27)	2.09 (2.24)	1.46 (1.76)	1.99 (2.28)
DO, mg/L	4.69 (4.49)	5.13 (5.38)	4.54 (4.30)	7.20 (7.05)	6.41 (6.11)	3.10 (3.11)	5.22 (5.11)
DO %of Sat.	49 (47)	53 (57)	46 (44)	72 (72)	65 (64)	32 (31)	53 (52)
WY24 Grade	43 C	43 C	38 C	50 B-	45 C	26 D	35 D
WY23	34 D+	35 D+	32 D	47 C	43 C	19E	29 D
WQI (norm)	(35) D	(36) D	(30) D	(46) C	(38) C-	(17) E	(33) D
Summer Perio	d (June 2024 -	September	2024):				
ADF, cfs	5.8 (3.9)	5.7 (3.8)	5.6 (3.8)	4.6 (2.6)	4.3 (2.4)	1.8 (0.9)	4.4 (2.7)
Temp, ∘C	23.8 (23.7)	22.8 (22.8)	22.8 (22.6)	21.3 (20.8)	21.6 (20.6)	23.9 (22.8)	22.6 (22.1)
SpC, mS/cm	3.52 (3.33)	3.20 (3.17)	2.14 (2,70)	2.47 (2.43)	2.61 (2.64)	1.99 (1.93)	2.71 (2.68)
DO, mg/L	3.45 (2.50)	3.50 (3.82)	2.04 (2.23)	5.55 (4.72)	5.39 (4.80)	1.79 (2.18)	3.69 (3.46)
DO % of Sat.	41 (30)	42 (45)	24 (26)	64 (55)	61 (52)	21 (26)	43 (40)
WY24 Grade	32 D	29 D	17 E	39 C-	37 D+	11 F	14 E-
WY23	17 E	19 E	12 F+	8 F	19 E	7 F	13 E-
WQI (norm)	(20) E	(21) E	(13) E-	(27) D	(25) D-	(9) F	(19) E
Winter Period	(December 20	23 - March 2	2024):				
ADF, cfs	101 (70)	99 (69)	97 (68)	66 (46)	58 (40)	24 (17)	69 (48)
Temp, ∘C	12.6 (14.3)	12.1 (13.9)	12.0 (13.8)	11.2 (12.1)	11.7 (12.8)	12.1 (13.4)	11.9 (13.3)
SpC, mS/cm	1.94 (1.85)	1.81 (1.80)	1.55 (1.64)	2.32 (2.02)	1.84 (1.74)	1.61 (1.42)	1.88 (1.75)
DO, mg/L	7.14 (6.65)	7.55 (7.11)	7.24 (6.54)	9.78 (9.14)	8.40 (7.95)	4.68 (4.21)	7.18 (6.79)
DO % of Sat.	68 (65)	71 (70)	68 (63)	90 (87)	78 (73)	44 (40)	70 (65)
WY24 Grade	50 B-	53 B-	55 B	60 B	56 B	30 D	48 C
WY23	47 C	50 B-	48 C+	62 B	46 C	32 D	47 C
WQI (norm)	(50) B-	(51) B-	(48) C+	(63) B	(50) B-	(27) D	(47) C

Appendix F - Trends in WQM Running Averages (WY05-WY24)

The variances in 12-mo running average values for selected sections of the lower river and overall, extending from Sept. '04 through Sept. '24, for each of the primary WQM metrics are presented in **Charts F.1-F.5** along with associated 20-yr trend lines (dashed) for each portion. The final **Chart F.6** compares overall (LSDR) variances and trends for several key water quality metrics. Extended periods (cycles) of below average rainfall (red line) and streamflow (blue) result in below average DO (green), above average SpC (yellow) and below average WQI values (black line). These relationships, patterns and trends by river reach are further

