

LOWER SAN DIEGO RIVER WATER QUALITY

WY20 Water Quality Monitoring Report (Appendices A through H)



Early Spring flood flow immediately downstream of Admiral Baker Field (Monitoring Site 7).

Supporting Water Quality Monitoring Data for the Lower San Diego River

John C. Kennedy, PE

November 2020

LOWER SAN DIEGO RIVER WY20 WATER QUALITY REPORT (APPENDICES A-H)

Table of Contents

	<u>Page No</u>
A. RiverWatch WQM Program Volunteers	3-4
B. Glossary	5
C. References	6-7
 D. LSDR WQM Metrics 16-Year Summary (WY05-WY20)	 8-9
Table D.1 WQM Data Results Summary (Annual & Seasonal Averages)	
Table D.2 WQM Data Results Summary (16-yr Spatial Averages)	
 E. SD RiverWatch WQ Monitoring Program	 10-14
Table E.1 LSDR Sections, Reaches and Monitoring Sites	
Table E.2 - LSDR WQM Site Parameters	
Table E.3 - LSDR Water Quality Monitoring Locations	
Figure E.1 - Lower San Diego River Catchment and WQM Sites	
 F. LSD River Hydrology and Water Quality	 15-18
Table F.1 - Lower SDR Average Daily Flows (WY05-WY20)	
Table F.2 - Rainfall and Long-Term Average Daily Flows (1914-2020)	
Table F.3 - Annual Rainfall and Average Daily Flows (WY05-WY20)	
Charts F.1 - F.4 LSDRiver Hydrologic Data	
 G. Monthly WQM Data by Site	 19-28
Table G.1 West, Mid & East Section Water Temperature Readings	
Table G.2 West, Mid & East Section pH Readings	
Table G.3 West, Mid & East Section Specific Conductance Readings	
Table G.4 West, Mid & East Section Dissolved Oxygen Concentration Readings	
Table G.5 West, Mid & East Section DO Percent of Saturation Readings	
Table G.6 Nutrient (NO3 and PO4) Readings at Selected Sites	
 H. Water Quality Indexing	 29-32
Table H.1 WY20 WQI Values by Monitoring Site - West Section	
Table H.2 WY20 WQI Values by Monitoring Site - Mid & East Sections	
Chart H.1 LSDR Running Average WQI by Reach (WY05-WY20)	
Chart H.2 LSDR Streamflow and WQI Running Averages (WY05-WY20)	
Chart H.3 LSDR Temporal WQI Profiles and Streamflow	
Chart H.4 LSDR Spacial WQI Profiles	

Appendix A - SDRPF RiverWatch WQM Team

Supervision/Coordination: Rob Hutsel (2004-2005), Kym Hunter (2006-2007), Shannon Quigley-Raymond (2008-2019), Lisa Schiavinato, Natasha Rodriguez, Aixa Willoughby (2020)

Volunteers: (participating multiple times)

Aidan Kennedy	Ebony Quilteret
Alan Ramirez	Edward Garritty
Alexandra Shalosky	Ehk'lu (Soltan)
Amethyst Cruspero	Emily Erlewine
Amy Cook	Erin Babich
Ang Nguyen	Fred Ward
Barbara Owen	Gabriel Martinez Mercado
Bill Martin	Gary Strawn **
Birgit Knorr	George Liddle **
Bob Stafford **	Gina Martin
Brent Redd	Jack Greco
Calvin Vine **	Jalil Ahmad
Cameron Bradley	Janae Fried
Carl Abulencia	Jasmin Augstin
Celena Cui	Jason Andres
Chandler Hood	Jim Thornley
Chris Peter	Joan Semler
Chris (Soltan)	John Kennedy **
Christine Lavoine	Joyce Nower
Clint Williams	Karrengton Fountain
Cody Gallagher	Katharyn Morgan
Conrad Brennen **	Katherine Crosby
Craig McCartney	Kathryn Stanaway
Dani Tran	Katy Robinson
Danielle Marshall	Kelly Brown
David Lapota	Kenneth Santos
Demitrio Duran	Kevin Bernaldez
Donna Zoll	Krissy Lovering
Doug Taylor	Krystal Tronboll
Duncan Miller	Laqueta Strawn

Appendix A - Team Volunteers (continued)

Linda King	Nicole Beeler
Linda Tarke	Noah Potts
Lindsey Dornes	Norrie Robbins
Lindsey Teunis	Paul Hormick **
Lindy Harshberger	Paul Nguyen
Lois Dorn	Rachel Morales
Lucas Salazar	Randy Mitchell
Madison McLaughlin	Raymond Ngo
Maesa Hanhan	Reggie Agarma
Marcus King	Russell Burnette
Mark Carpenter	Sami Collins
Mark Dreiling **	Samuel Martin
Mark Hammer	Sandra Pentney
Marlene Baker	Sara Winter
Martin Offenhauer **	Shelia-Ann Jacques
Mary Hansen	Silvana Procopio
Matt Olson	Star Soltan
Melany Vina	Tim Toole
Melissa Garret	Tina Davis
Melissa Maigler	Tom Younghusband **
Michael Mikulak	Toni Nguyen
Michael Sowadski	Tony de Garate
Mike Hanna **	Trish Narwold
Mike Hunter	Valerie Rawlings
Mitchell Manners	Veronika Shevchenko
Mitzi Quizon	Vidhya Nagarajan
Mojisola Ogunleye	Wendy Kwong
Natellie Rodriguez	Yang Jiao
	Yvette Navarro

*** Team Leaders*

Appendix B - Glossary

Abbreviations:

AADF - Average Annual Daily Flow
 ACC - Average Coliform Count (arithmetic mean of fecal coliform, e-Coli & total coliform in MPN/100mL)
 ADWF - Average Daily (stream) Dry-Weather Flow
 AFY - acre-feet per year
 Avg - Average
 cfs - cubic feet per second (flow/discharge)
 Ck - Creek
 CY - Calendar Year (Jan 1 - Dec 31)
 DO - Dissolved Oxygen
 DOD - Dissolved Oxygen Depletion (level below minimum required)
 DO%Sat - Dissolved Oxygen expressed as percentage of DO level at saturation point
 d/s - downstream // {u/s - upstream}
 E - East // {W - West}
 FSDRIP - First San Diego River Improvement Project
 ft. - feet // {mi. - mile}
 gal - gallon
 Ln(x) - natural logarithm of (x) to base-e (2.718)
 log(x) - common logarithm of (x) to base-10
 L/U - lower/upper (as in river reaches)
 LSDR - Lower San Diego River
 max/min - maximum/minimum
 MCC - Mean Coliform Count (geometric mean of fecal coliform, e-Coli & total coliform in MPN/100mL)
 mg/L - milligrams per litre
 mi. - mile
 mS/cm - milliSeimens per centimetre
 (1 mS/cm = 1,000 uS/cm)
 MG - Mission Gorge (mid-section of LSDR)
 MV - Mission Valley (West section of LSDR)
 MPN - Most Probable Number (of coliform organisms)
 SB - Santee Basin (East section of LSDR)
 PDMWD - Padre Dam Municipal Water District
 pH - measure of acidity or basicity (decimal logarithm of hydrogen ion activity)
 ppm - parts per million
 Q - stream flow or discharge
 SB - Santee Basin
 SpC - Specific Conductivity (also Conductivity or Conductance; sometimes abbreviated SC)
 SDRPF - San Diego River Park Foundation
 TDS - Total Dissolved Solids
 Temp. - Temperature
 TN/TP - Total Nitrogen/ Total Phosphorus (nutrients)
 USGS - U.S. Geological Survey
 uS/cm - microSeimens per centimetre
 (1 uS/cm = 0.001 mS/cm)
 u/s - upstream // {d/s - downstream}
 W - West // {E - East}
 WQI - Water Quality Index (WQI_a)
 WQI₍₄₎ - WQI using 4 parameters
 WQI₍₆₎ - WQI using 6 parameters
 WY - Water Year (Oct 1 - Sept 31)
 % - percent
 %Sat - percent of DO saturation value
 C - degrees Celsius °C = (°F-32)*5/9
 °F - degrees Fahrenheit °F = (°C*9/5) + 32

Formulas:

Flow (cfs) = Velocity (ft/sec)*Cross-sectional area (sq ft)
 Constituent Load (lbs/day) = Q (mgd)*Concentration (ppm)*8.34; or Q (cfs)*Concentration (mg/L)*5.39 where Q is streamflow/river discharge.

Total Dissolved Solids (TDS in mg/L) = 670*Specific Conductivity, (where SpC is in mS/cm). An approximate relationship for LSDR watershed; other variables (e.g., temperature, pressure, specific ions) are considered negligible).

DO - DO%Sat relationship is defined by the following polynomial equation:

$$\text{DO}(\text{mg/L}) = \text{DO}\% \text{Sat} * [0.004 * T^2 - 0.343 * T + 14.2] / 100$$

$$\text{DO}\% \text{Sat} = \text{DO}(\text{mg/L}) * 100 / [0.004 * T^2 - 0.343 * T + 14.2]$$
 where T = temperature is in °C.
 Other variables, incl. barometric pressure, elevation and conductivity (SpC), have negligible impact on the DO-DO%Sat relationship within the LSDR watershed.

SDR Water Quality Index (WQI) is calculated using the following set of equations:

$$\text{WQI}_4 = \text{DO}\% \text{Sat} * 2.5 * T \text{ factor} * Q \text{ factor} / \log(\text{SpC});$$
 where SpC is expressed in uS/cm;
 the T factor = $0.0055T^3 - 0.163T^2 + 1.37T - 2.5$, and the Q factor =
 $0.56 + 0.173 \text{Ln}Q - 0.002 \text{Ln}Q^2 - 0.0033 \text{Ln}Q^3$ (M Valley);
 $0.72 + 0.15 \text{Ln}Q - 0.0051 \text{Ln}Q^2 - 0.004 \text{Ln}Q^3$ (M Gorge);
 $0.87 + 0.107 \text{Ln}Q - 0.018 \text{Ln}Q^2 - 0.003 \text{Ln}Q^3$ (Santee);
 $0.1 + 0.05 \text{Ln}Q - 0.042 \text{Ln}Q^2 - 0.0011 \text{Ln}Q^3$ (Tributaries)

$$\text{WQI}_6 = \text{Avg.} [\text{DO}\% \text{f} * \text{wt}_{(\text{DO})}, \text{SpCf} * \text{wt}_{(\text{SC})}, \text{pHf} * \text{wt}_{(\text{pH})}, \text{MCCf} * \text{wt}_{(\text{MCC})}, \text{Qf} * \text{wt}_{(\text{Q})}, \text{Tempf} * \text{wt}_{(\text{T})}]^{1.75}$$
 where $\text{wt}_{(\text{DO})} = 3$, $\text{wt}_{(\text{SC})} = 2$, $\text{wt}_{(\text{pH})} = 1$,
 $\text{wt}_{(\text{MCC})} = 1$, $\text{wt}_{(\text{Q})} = 2$ and $\text{wt}_{(\text{T})} = 1$

The SDR WQI is developed specifically for the SDRPF RiverWatch Monitoring Program, however, the equations could also be applied to water quality and hydrologic data for other coastal watercourses where comparable metrics are available.

Water Equivalents:

1 cf = 7.48 gal = 62.4 lbs of water
 1 AF = 43,560 cf = 325,900 gal
 1 psi = 2.31 ft of water (head)
 1 mg/L = 1 ppm (in water)
 1 cfs = 450 gpm = 0.646 mgd = 1.98 AF/day = 724 AFY
 1 mgd = 694 gpm = 1.547 cfs = 3.06 AF/day = 1,120 AFY
 1,000 gpm = 1.436 mgd = 2.23 cfs = 4.42 AF/day = 1,614 AFY
 1 inch (rainfall) = 25.4 mm

Appendix C - References

1. *The Role of the San Diego River in Development of Mission Valley*, Nan Papageorge, The Journal of San Diego History (Vol. 17, No. 2), Spring 1971
 2. *Evaluation of the Mission, Santee, and Tijuana Hydrologic Subareas for Reclaimed-Water Use, San Diego County, CA*, John Izbicki, USGS Water Resources Investigations Report 85-4032, 1985
 3. *Water Quality Control Plan for the San Diego Basin*, San Diego RWQCB, 1994
 4. *Waste Discharge and Water Recycling Requirements for the Production and Purveyance of Recycled Water*, Padre Dam Municipal Water District (PDMWD), San Diego County, San Diego RWQCB, 1997
 5. *Groundwater Report*, San Diego County Water Authority (SDCWA), 1997
 6. *Waste Discharge Requirements for PDMWD Padre Dam Water Recycling Facility, Discharge to Sycamore Creek and the San Diego River, San Diego County*, San Diego RWQCB Order No. 98-60 (NPDES No. CA010749), 1998
 7. *Modification of Water Quality Order 99-08-DWQ State Water Resources Control Board (SWRCB) National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction Activity*, San Diego RWQCB Resolution No. 2001-046, 2001
 8. *General Waste Discharge Requirements for Groundwater Extraction Waste Discharges from Construction, Remediation, and Permanent Groundwater Extraction Projects to Surface Water within the San Diego Region except for San Diego Bay*, San Diego RWQCB, Order No 2001-96 (NPDES No. CAG919002), 2001
 9. *Waste Discharge Requirements for Discharge of Urban Runoff from Municipal Separate Storm Sewer Systems (MS4) Draining the Watersheds of the County of San Diego, the Incorporated Cities of San Diego County, and the San Diego Unified Port District*, San Diego Regional Water Quality Control Board (RWQCB) Order No 2001-01 (NPDES No. CAS0108758), 2001
 10. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego in conjunction with Cities of El Cajon, La Mesa, Santee, Poway and County of San Diego, 2001
 11. *General Waste Discharge Requirements for Discharges of Hydrostatic Test Water and Potable Water to Surface Waters and Storm Drains or Other Conveyance Systems*, San Diego Region, San Diego RWQCB, 2002
 12. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego Lead Agency, City of Santee, City of Poway, County of San Diego, Jan 2003
 13. *Watershed Sanitary Survey*, City of San Diego Water Department, Jan 2001, rev. May 2003
 14. *Clean Water Action Plan and Status Report*, County San Diego Project Clean Water, June 2003
 15. *San Diego River Watershed Water Quality Report*, Anchor Environmental & others, Oct 2003
 16. *San Diego River Watershed Management Plan Final WMPlan*, Anchor Environmental and others, SDR Watershed Work Group, March 2005
 17. *2005 Watershed Sanitary Survey - Volume 2 San Diego River System*, City of San Diego Water Department, Water Quality Laboratory, Aug 2005
 18. *San Diego River Baseline Sediment Investigation Final Report*, City of San Diego, Weston Solutions, Oct. 2005
 19. *Monitoring Workplan for the Assessment of Trash in San Diego County Watersheds*, (Weston Solutions Brown & Caldwell), County of San Diego, Aug 2007
 20. *San Diego Integrated Regional Water Management Plan*, San Diego County Water Authority, City of San Diego and County of San Diego, Oct 2007
 21. *Allopathic potential of two invasive alien Ludwig spp*, Dandelot et. al., Elsevier Aquatic Botany 88 (4):311-316, Dec 8, 2007
 22. *Surface Water Ambient Monitoring Program (SWAMP) Report on the San Diego Hydrologic Unit, Final Technical Report 2007*, Southern California Coastal Water Research Project, San Diego RWQCB, Jan 2008
 23. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego, Storm Water Pollution Prevention Division, TRC, March 2008
- note: all references (1-52) available online*

Appendix C - References (continued)

24. *There is No San Diego River*, Bill Manson, San Diego Weekly Reader, Oct 22, 2008
25. *The Ecological and Hydrological Significance of Ephemeral and Intermittent Streams in the Arid and Semi-arid American Southwest*, EPA/660/R-08/134, Nov. 2008
26. *Water, The Epic Struggle for Wealth, Power, and Civilization*, Steven Solomon, Harper, 2010
27. *San Diego River FY 2008-2009 WURMP Annual Report*, TRC, January 2010
28. *San Diego River Tributary Canyons Project Final Feasibility Report*, April 2010
29. *The invasive water primrose Ludwigia grandiflora in Germany: First record and ecological risk assessment*, Nehring & Kolthoff, Agency for Nature Conservation, Germany, Aquatic Invasions 2011 REABIC (Vol 6, i1: 83-89) Dec 16, 2010
30. *Guidelines for Citizen Monitors*, SWAMP Clean Water Team Citizen Monitoring Program Guidance Compendium, SWRCB website (10/5/11 update)
31. *2011 Long-Term Effectiveness Assessment, San Diego Stormwater Co-permittees Urban Runoff Management Programs*, Final Report, Walker Assoc. Weston Solutions, June 2011
32. *San Diego River Conservancy 2012 Work Plan*, Governing Board, March, 2012
33. *The Day the San Diego River Was Saved: The History of Floods and Floodplain Planning in Mission Valley*, Philip R. Pryde, Journal of San Diego History, (Vol. 57, No. 3) 2012
34. *San Diego River Watershed Bioassessment and Fish Tissue Analysis*, RWQCB, Feb. 2013
35. *San Diego River Park Master Plan*, City of San Diego, April 18, 2013
36. *Watershed Asset Management Plan, Final Report*, Storm Water Division, Transportation and Storm Water Department, City of San Diego, July 19, 2013
37. *San Diego River Watershed Comprehensive Load Reduction Plan - Phase II*, Tetra Tech Inc, Final July 24, 2013
38. *Aquatic Conservation: Marine and Freshwater Ecosystems, A success story: water primroses, aquatic pests*, Thouvenot, Haury & Thiebaut, (Vol 23, i5: 790-803) Oct. 2013
39. *San Diego River Restoration Involves Clearing Homeless, And Their Trash*, Susan Murphy, KPBS, Jan. 16, 2014
40. *San Diego River Watershed Monitoring and Assessment Program*, B. Bernstein (SWAMP-MR-RB9-2014-0001), RWQCB, Jan. 20, 2014
41. *Nonstructural Non-Modeled Activity Pollutant Load Reduction Research - Addendum Final*, HDR, City of San Diego, Nov. 5, 2014
42. *San Diego River Causal Assessment Case Study, Appendix C , Causal Assessment Evaluation and Guidance for CA*, SCCWRP Tech Rpt. 750, April 2015
43. *Lower San Diego River Dissolved Oxygen Levels*, J.C. Kennedy, San Diego River Coalition presentation, June 19, 2015
44. *Lower San Diego River Streamflow and Water Quality Metrics*, J.C. Kennedy, SDR Coalition presentation, Aug. 21, 2015
45. *San Diego River Watershed Management Area Water Quality Improvement Plan*, Walker Assoc. & AMEC, San Diego RWQCB, September 2015
46. *Analysis of Anionic Contribution to Total Dissolved Solids in the Lower San Diego River*, Janae Fried, SDSU Thesis (Geological Sciences), Fall 2015
47. *San Diego River Watershed Management Area Water Quality Improvement Plan*, L. Walker & Assoc., January 2016
48. *Application of regional flow-ecology relationships: ELOHA framework in the San Diego River watershed*. E.D Stein SCCWRP Research Article, DOI: Ecohydrology.e1869, April 2017
49. *Regional Assessment of Human Fecal Contamination in Southern California Coastal Drainages*, SCCWRP #0999, International Journal Env.Research & Public Health, Aug. 2017
50. *San Diego Region Bacteria TMDL Cost-Benefit Analysis, Final Report*, RWQCB, Oct. 2017
51. *Increased Homeless Population Along San Diego River Hampers Water Quality*, KPBS, Erik Anderson, Nov. 28, 2017
52. *San Diego River Watershed Management Area Water Quality Improvement Plan (SDRWQIP)*, Project Clean Water, March 14, 2018

Appendix D - LSDR Water Quality Monitoring Metrics 16-yr Summary

Table D.1 WQM Metrics 16-yr Summary (Annual & Seasonal Averages)																		
WY	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	16-yr Norms	
Annual (October-September):																		
ADF, cfs	57	12	9	17	19	32	24	13	8	5	9	14	42	6	23	30.1	(20.1)	
Temp, °C	17.7	18.3	17.8	17.8	17.9	18.1	17.9	18.0	17.4	17.9	18.6	18.2	18.6	18.3	17.9	18.4	(18.0)	
SpC, uS/cm	2.05	2.14	2.37	2.22	2.40	2.26	2.15	2.30	2.42	2.53	2.16	2.23	2.15	2.78	2.16	2.15	(2.28)	
DO, mg/L	6.32	5.66	5.52	5.99	5.92	4.85	5.10	4.73	4.90	3.52	3.93	4.10	4.70	3.98	4.63	5.01	(4.98)	
DO%Sat,	60	56	56	61	61	50	53	49	50	37	42	43	50	42	48	53	(51.3)	
pH	7.57	7.34	7.47	7.88	7.61	7.83	7.86	7.68	7.75	7.64	7.76	7.73	7.78	7.95	7.75	7.81	(7.71)	
WQI	40	35	34	36	35	32	36	31	30	20	25	25	31	22	30	32	(31.3)	
Grade	C	D+	D	D+	D+	D	D+	D	D	E	D-	D-	D	E	D	D	(D Marg)	
Summer (June-September) Period:																		
ADF, cfs	3.3	3.8	1.4	1.9	1.2	1.9	3.1	1.6	1.2	0.8	5.2	0.7	1.8	0.5	2.4	2.7	(2.1)	
Temp, °C	21.7	23.6	21.8	23.0	23.0	22.0	21.8	23.0	21.7	22.8	22.9	21.9	23.3	23.0	22.1	23.5	(22.6)	
SpC, uS/cm	2.52	2.37	2.69	2.93	3.10	2.88	2.75	2.96	2.95	2.94	2.16	3.05	2.73	3.16	2.74	2.61	(2.78)	
DO, mg/L	4.02	4.20	3.81	4.56	4.20	3.45	3.28	3.20	2.91	2.26	3.06	2.60	3.13	2.59	2.75	3.95	(3.42)	
DO%Sat, %	42	49	43	51	49	39	38	38	34	27	35	30	37	30	32	47	(39.5)	
pH	7.51	7.47	7.41	7.91	7.50	7.84	7.92	7.94	7.71	7.94	7.81	7.80	7.74	8.00	7.72	7.92	(7.70)	
WQIa	24	23	20	22	20	19	20	17	14	11	17	11	17	9	15	21	(18.0)	
Grade	E+	E+	E	E	E	E	E	E	E	F	E	F	E	F	E	E	(E Poor)	
Winter (December-March) Period:																		
ADF, cfs	147	19	18	44	53	83	49	20	20	10	18	33	116	15	63	17.7	(45.3)	
Temp, °C	13.7	12.9	13.9	12.5	13.4	14.2	13.8	12.4	12.4	13.4	15.3	14.1	14.4	13.8	14.2	13.6	(13.6)	
SpC, uS/cm	1.38	2.00	2.02	1.53	1.49	1.32	1.32	1.65	1.99	2.22	1.86	1.69	1.22	2.16	1.28	1.63	(1.67)	
DO, mg/L	9.16	6.40	6.59	6.96	7.31	5.76	7.01	6.30	7.26	4.68	4.56	5.56	7.24	5.44	7.18	6.79	(6.56)	
DO%Sat	83	58	64	66	71	57	68	59	68	45	46	54	72	53	71	66	(62.9)	
pH	7.57	7.33	7.69	8.06	7.72	7.68	7.84	7.41	7.76	7.53	7.79	7.57	7.77	7.89	7.75	7.81	(7.71)	
WQIa	58	46	47	52	53	49	50	41	48	29	32	37	53	36	52	47	45.8	
Grade	B	C	C	B-	B-	C+	B-	C	C+	D	D	D+	B-	D+	B-	C	(C Fair)	

(a) Values in red text are below 16-yr norms (expressed in parentheses); values above norms are in blue.

Table D.2 WQM Metrics Summary by River Section and Reach (WY20 & 16-yr Norms)

Section	Mission Valley		Mission Gorge	Santee Basin		Watershed
Sites	1-4	5-7	8-10	11,12,15	13,14	all (1-15)
Reach	LMV	UMV	MG	LSB	USB	LSDR ^(a)
Annual (October 2019 - September 2020):						
ADF, cfs	49 (29.6)	46 (27.5)	26 (18.7) ^(b)	21 (16.3)	9.3 (5.0)	30 (20.0)
Temp, °C	19.9 (19.4)	18.5 (17.9)	17.3 (17.1)	17.5 (17.4)	18.2 (18.1)	18.4 (18.0)
SpC, mS/cm	2.63 (2.58)	2.46 (2.55)	2.09 (2.28)	2.07 (2.25)	1.52 (1.78)	2.15 (2.28)
DO, mg/L	5.52 (5.06)	3.73 (4.44)	7.50 (7.49)	6.50 (6.54)	2.33 (2.99)	5.01 (4.98)
DO % of Sat.	60 (54)	38 (46)	77 (77)	67 (64)	25 (31)	53 (51)
WQIa	37 (34.8)	34 (30.0)	45 (45.6)	41 (36.5)	15 (17.1)	32 (31)
WY20 Grade	D+ Marginal	D Marginal	C Fair	C Fair	E Poor	D Marginal
16-yr Norm	(D Marginal)	(D Marginal)	(C Fair)	D+ Marginal	(E Poor)	(D Marginal)
Summer (June 2020 - September 2020) Period:						
ADF, cfs	3.4 (3.2)	3.2 (2.9)	2.9 (1.9) ^(c)	2.8 (1.8)	1.1 (0.4)	2.7 (2.1)
Temp, °C	25.5 (24.3)	23.6 (21.9)	22.2 (21.8)	21.6 (21.5)	23.7 (22.9)	23.5 (22.6)
SpC, mS/cm	3.32 (3.25)	3.09 (3.17)	2.39 (2.86)	2.07 (2.25)	1.52 (1.78)	2.61 (2.78)
DO, mg/L	4.24 (3.22)	2.88 (2.51)	3.90 (5.58)	6.66 (5.62)	2.13 (2.13)	3.95 (3.42)
DO % of Sat.	52 (39)	34 (29)	42 (61)	76/(64)	26 (25)	47 (39)
WQI	25 (20.5)	17 (14.5)	30 (27.5)	29 (24.4)	10 (9.2)	21 (18.0)
WY20 Grade	D- Marginal	E Poor	D Marginal	D Marginal	F Very Poor	E Poor
16-yr Norm	(E Poor)	(E Poor)	(D Marginal)	(E+ Poor)	(F Very Poor)	(E Poor)
Winter (December 2019- March 2020) Period:						
ADF, cfs	27 (67.8)	25 (61.9)	16.3 (42.6)	13.7 (36.4)	5.8 (11.4)	17.7 (45.3)
Temp, °C	14.6 (14.5)	14.1 (13.7)	12.7 (12.7)	13.3 (13.4)	13.2 (13.6)	13.8 (13.6)
SpC, mS/cm	1.86 (1.84)	1.75 (1.76)	1.76 (1.63)	1.75 (1.81)	1.24 (1.44)	1.64 (1.67)
DO, mg/L	7.59 (6.91)	7.84 (6.57)	9.64 (9.16)	8.24 (7.92)	2.75 (3.94)	5.46 (6.46)
DO % of Sat.	74 (68)	76 (64)	92 (87)	79 (73)	27 (37)	53 (62)
WQI	54 (50.1)	57 (47.7)	63 (62.7)	54 (50.1)	19 (27.1)	47 (45.8)
WY20 Grade	B Good	B Good	B Good	B Good	E Poor	C Fair
16-yr Norm	(B- Good)	(C+ Fair)	(B Good)	(B- Good)	(D Marginal)	(C Fair)

WY20 WQ metrics below (less than) 16-yr norms (expressed in parentheses) are in red text; values above norms are in blue.

(a) Weighted average of all five reaches within the Lower River watershed.


(b) Streamflow based on seasonal river channel gains/losses between Santee Basin and Mission Valley.

Appendix E - San Diego RiverWatch WQ Monitoring Program

Appendix E provides an overview of SDRPF's RiverWatch water quality monitoring (WQM) program that, over the last 14 years, has been engaged in collecting and assessing data pertaining to the Lower San Diego River (LSDR) watershed on a continuous monthly basis.

Monitoring Period & Coverage: Monthly monitoring over past 14 years (Oct. 2004 – Sept. 2018) covering the Lower San Diego River and its tributaries extending downstream from Lakeside (river mile 19.8 elev. 340 ft amsl) to the Estuary (river mile 2.96, elev. 5.8 ft amsl) under the I-5/ Pacific Hwy. overpasses. The LSDR watershed and monitoring sites are shown on **Figure E.1**.

Figure E.1 - Lower San Diego River Catchment and WQM Sites

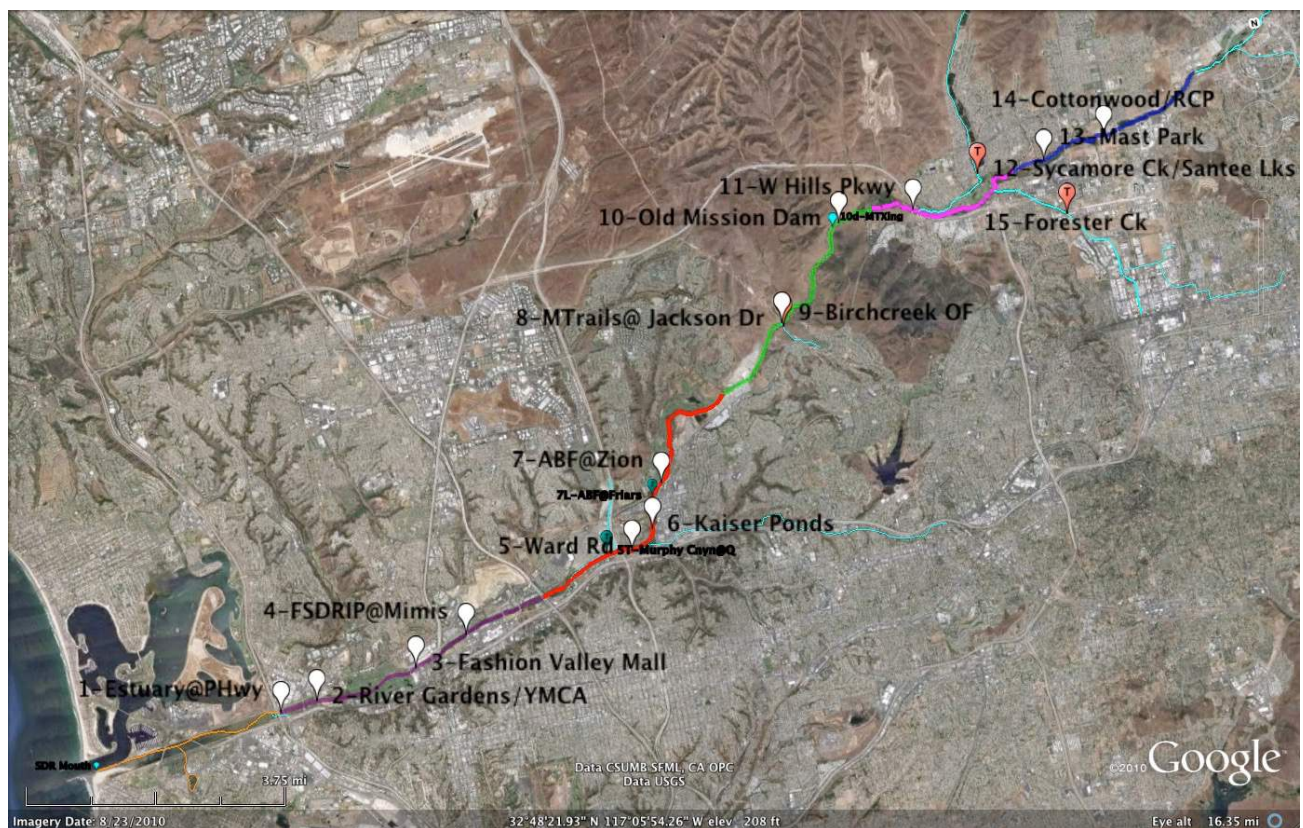

Color Code for LSDR reaches on figure above: Estuary (orange), LMV (purple), UMV (red), MG (dark green), LSB (violet), USB (dark blue), Lakeside (light green), tributaries (light blue). Figure details can be downloaded through Google Earth from SDRPF website/River Monitoring page: file <Fig1.1WQMR.kmz>

Monitoring Sites: 15 total - 12 on main course (Mission Valley Section - sites 1-7, Mission Gorge Section - sites 8-10, Santee Basin Section - sites 11-15) plus three tributary stream sites are listed in **Table E.1**.

Table E.1 LSDR Sections, Reaches and Monitoring Sites

Section/Reach/Tributary	Site #s	Comments
Estuary Entrance	1E/1W	Tidal influence at transition from river to estuary
Lower Mission Valley (LMV)	2E/W, 3 & 4	4 miles of lower river extending to I-805
Upper Mission Valley (UMV)	5,6 & 7	4-mile stretch from I-805 to Princes View Dr
Mission Valley (West Sites)	1-7	8-mile western portion through Mission Valley
Mid-Section : Mission Gorge (MG)	8,9T & 10	5-mile mid-section, Princess View Dr to Kumeyaay Lk
Lower Santee Basin (LSB)	11,12T&15T	2-mile stretch from Kumeyaay Lk to Carlton Hills Blvd (Mast Park West)
Upper Santee Basin (USB)	13 & 14	3-mile stretch from Carlton Hills Blvd (Mast Park West) to Riverford Rd
Santee Basin (SB)	11-15T	5-mile eastern section from Kumeyaay Lk to Lakeside
Eastern Sections (East Sites)	8 -15T	10-mile eastern/upper 3 reaches (2 sections)
Tributaries:		
Murphy Canyon/Qualcom ^{a)}	5a	Enters LSDR southwest of SDSU Stadium
Jackson Dr/Birchcreek Wash ^{b)}	9T	Enters LSDR at Sycott Wash (just d/s of Site 8)
Santee Lakes/E. Sycamore Cnyn Ck	12T	Enters LSDR at Carlton Oaks GC (u/s of Site 11)
Forester Creek ^{c)}	15T	Enters LSDR d/s of Carlton Oaks GC at Site 11
Lower SDR Watershed (LSDR)	1-15T	Weighted average of all 5 reaches or all 3 sections

(a) Monthly monitoring discontinued in WY07; nearby Ward Rd Bridge site renumbered as 5.

(b) Monthly monitoring initiated in 2008; site also termed Jackson Dr: Outfall (OF).

(c) Monthly monitoring initiated in 2007 with adjusted site location in 2009 and again in 2017 back to original location in vicinity of SR 52.

WQ Parameters: Seven measured and recorded parameters (Temp, pH, SpC, DO, DO%Sat, NO₃ & PO₄) plus subjective field observations re: environs and characteristics are listed in **Table E.2**. As nutrient testing for NO₃ and PO₄ is carried out at five selected sites; two in West (2 & 6) and three in East (11,14 & 15T), respectively, results are not used in performing statistical analyses regarding reaches/sections of the river. Number of datum for each of the five physical-chemical parameters monitored monthly at each site over the 13-yr period (Oct. 04 - Sept. 17) are in the range of 100 to 120. Two other water quality parameters monitored by others at several sites, streamflow from USGS (Poway Office) and coliform counts from SDCoastKeeper, are also recorded for purposes of computing the water quality index.

Protocol: East Side – (Santee Basin & Mission Gorge Sections). The 8 sites within upper three reaches (MG, LSB & USB) typically monitored 3rd Fri. or Sat. of month. West Side - (Mission Valley Section). Seven sites within the lower two reaches (LMV & UMV) monitored monthly, typically 3rd Sun. of month.

Table E.2 - LSDR Water Quality Monitoring Parameters

WQ Parameter	unit	Comments
<i>Measured monthly at all sites:</i>		
1. Temperature (Water Temp)	°C	Basic characteristic and WQ driver (see Table G.1)
2. pH	-	Degree of acidity (<7.0) or alkalinity (>7.0) (see Table G.3)
3. Specific Conductivity (SpC)	mS/cm	Measure of ionic content or dissolved solids (see Table G.2)
4. Dissolved Oxygen (DO)	mg/L	Good indicator of relative water quality (see Table G.4)
5. Percent of DO Saturation (DO%Sat)	%	Good indicator of general water quality (see Table G.5)
<i>Sampled/tested monthly at selected sites: (typically 5 - 3 East & 2 West)</i>		
6. Nitrate (NO ₃ -N)	mg/L	Important nutrient for biological activity
7. Phosphate (PO ₄ -P)	mg/L	Key nutrient for biological activity
8. Turbidity	NTU	General indicator of amount of suspended and settleable solids
9. Barometric Pressure	mBars	Atmospheric (air) pressure that along with water temperature affects dissolved oxygen levels.
<i>Environmental Observations recorded at all sites:</i>		
Atypical or notable conditions (scum, discoloration, odors, etc.), trash/debris, homeless encampments, biological activity (aquatic, avian, terrestrial), expansion of invasive species, erosion, scouring, other noteworthy comments re: watercourse, shoreline and adjacent environs. Special note as to invasive aquatic plant growth on water surface.		
<i>General WQ Conditions observed at all sites: (numerical coding added in 2010)</i>		
Weather Condition, Presence of Algae, Clarity, Color, Odor, Flow, Foam, Litter, Odor, Oil and Grease (O&G), e		
<i>Parameters measured by others at selected sites</i>		
10. Streamflow	cfs	USGS gauging stations at Fashion Valley and Mast Rd. near Santee (see Table H.1)
11. Coliform counts: (Escheria-coli, Enterococcus, Total Coliform bacteria)	MPN/ 100mL	SD CoastKeeper data taken at Fashion Valley Rd and Old Mission Historic Dam monitoring sites (see Table H.2)

Team Leaders (1-2) and citizen volunteers (3-8) meet at an appointed location, organize field equipment/transportation, drive to sites, measure physical-chemical water quality using the YSI Sonde meter, note special conditions/observations, collect samples for subsequent testing, then return to office, perform nutrient (NO₃ & PO₄) tests, store samples for subsequent laboratory analyses and clean/check-in/store field equipment.

Data Management: Water quality data are typically managed in a three-step process.

1. *Raw* (source) data - each site, several of which have two monitoring locations (e.g. upstream/downstream of dam, riffle or crossing), date/time, measured WQ parameters, and non-quantifiable supporting observations and comments.

Table E-3 - WQM Site Locations

Site #	Site Name	u/s mi.	Elev. ft.	Location	GIS Coordinates Lat.	Long.
LMV - Lower Reach W Mission Valley: I-5 Bridge to I-805 Bridge (Sites 1-4)						
1	Estuary W/E	2.96	6	between PCH & I-5 on encased sewer main	32.76131	-117.20373
2	River Gardens E/W	3.50	11	W of YMCA, d/s of trolley at sewer X-ing	32.7623	-117.1944
3	Fashion Valley Mall W	5.08	22	T&C pedestrian bridge, Fashion Valley Rd (temp)	32.76517	-117.16869
4	FSDRIP	5.98	36	N of Mimi's on Mission Center Rd. Bridge	32.76986	-117.15482
UMV - Upper Reach E Mission Valley: I-805 Bridge to N end of Admiral Baker Field (Sites 5-7)						
5	Ward Rd Bridge	8.89	50	S. of Trolley overpass at Del Rio S intersection	32.78024	-117.11029
6	Kaiser Ponds	9.46	56	E. of Mission SD de Acala at SD Mission Rd.	32.78406	-117.10419
7	Admiral Baker Field	9.98	58	L - Lower (below Friars Rd bridge)	32.79038	-117.10314
	ABF - Zion Rd	10.2	62	Z - Terminus of Zion Ave at Riverdale St.	32.79304	-117.09984
West (MV) - Mission Valley Section: Estuary to Admiral Baker Field (Sites 1-7) [LMV+UMV]						
MG - Mission Gorge Reach: Quarry Area to Old Mission Dam (Sites 8-10)						
8	Mission Trails @ Jackson Dr	13.82	159	SDCWA downstream of Scycott Crossing	32.82124	-117.06205
9T	Jackson/Birchcreek Wash	13.86	198	San Marcos area drainage by Jackson Dr. Trail	32.82268	-117.06224
10	Old Mission Dam W/E	15.65	265	Downstream side of Old Mission Dam	32.83977	-117.04332
Mid-Section (MG) -Mission Gorge Section: Quarry Area to Old Mission Dam (Sites 8-10)						
LSB - Lower Reach Santee Basin: W Hills Pkwy to Carlton Hills Bridge (Sites 11,12 &15)						
11	West Hills Pkwy	17.03	300	at/below West Hills Pkwy overpass at USGS sta.	32.83936	-117.02436
12T	Carlton Oaks Dr/Santee	18.23	320	W Sycamore Ck/Santee Lakes @ Carlton Oaks Dr.	32.84431	-117.00635
15T	Forester Creek at Mission Gorge Rd (Rt 52/Prospect)	18.86	334	Primary tributary entering SDR just u/s of Site 11 past W.Hills Pky & Rt 52) at west end of COGC.	32.83221	-116.98658
USB - Upper Reach Santee Basin: Carlton Hills Bridge to Riverford Rd (Sites 13W, 13E & 14)						
13W	Mast Park West	18.35	328	below Carlton Hills Blvd, overpass		
13E	Mast Park East	18.50	330	Pedestrian bridge behind (N of) Walmart, end of River Rock Ct.	32.84696	-116.97335
14	Cottonwood Ave/RCP	19.84	340	N. of Chubb Ln. at N. Magnolia Ave.	32.84434	-116.98947
14	Magnolia Ave	19.9	342	Under Magnolia Bridge/West end of culvert	32.84424	-116.98950
East (SB) - Santee Basin Section: West Hills Parkway to Lakeside (Sites 11-15 above) [LSB+USB]						
LSDR - Lower San Diego River Watershed: SD Estuary to Lakeside (Sites 1-15 above) [LMV+UMV+MG+LSB+USB]						

2. *Compiled* (vetted/proofed) data - provided on Ecolayers w/date, site location, parameter value and additional observations of interest.
3. *Processed* (formatted/aggregated) data - with statistical computations associated with LSDR sites, reaches, sections and tributaries for each WQ parameter of interest including those monitored by others.

Statistical Computations: Various basic statistical values have been calculated from the data.

- Mean – average of a series (sum of values divided by number of values)
- Median – middle value of an ordered series (50% larger - 50% smaller)
- Minimum – lowest or smallest value measured
- Maximum – highest or greatest value measured
- Range – Difference between maximum and minimum values
- 1st Quartile (Q1) – 25% of values smaller - 75% larger
- 2nd Quartile (Q2) – 50% of values larger - 50% smaller (same as median value)
- 3rd Quartile (Q3) – 75% of values smaller - 25% larger
- Variance – sum of the squares of deviation from the mean or average value
- Standard Deviation (SD) – square root of the variance
- Skew – third moment about the mean divided by the standard deviation (SD)
- Coefficient of Variance (CoV)– Variance divided by the mean
- Trendline - Moving/running average values taken over 12-month period.

Appendix F - LSDR Hydrology and Water Quality

Streamflow or river discharge, is the volume of water moving past a designated location over a fixed period of time. It constitutes one of the primary drivers of changes in water quality. Often expressed as cubic feet per second (cfs) or million gallons per day (mgd), flow is the amount of water moving off a watershed into the watercourse, as affected by weather (increasing during rainstorms and decreasing during dry spells) and continually changing during each season. River flow rapidly decreases during summer months when rainfall is minimal, evaporation rates high and riparian vegetation extracts water from the ground. August and September, the last two months of summer (and a water year), are typically, but not always, months of lowest flow. A function of both volume and velocity, streamflow has a major impact on living organisms, riparian habitat, benthic conditions and overall water quality. Velocity of flow, typically increasing as volume increases, determines the kinds of organisms that live in an aquatic system and also affects the amount of silt and sediment transported. Fast moving water typically contains much higher DO concentration levels than sluggish flow, as its better aerated.

LSDR average daily flow (ADF) values as recorded at the two USGS gauging stations in the lower watershed are expressed in **Table F.1** for both the 16-yr monitoring period (Oct 2004 - Sept 2020) and over the past 55 years (1965-2020) of record. The ADF values are in close accord for both stations. River discharge over the last 16 years is roughly 20% below the 55-year norm in Mission Valley and 25% below the Santee norm. WY20 discharges are 47% greater than the 55-yr norm at the Fashion Valley Site and 21.5% above the norm at Santee. The average annual LSDR streamflow for WY20 of 33.1 cfs is 16.5% more than the long-range (55-yr) norm and 42% above the current 16-year norm.

Correlations between total annual rainfall and ADF over the past 56 years of hydrologic record and during the 16-year period of RiverWatch monitoring for the two lower SDR gauging stations are presented in **Tables F.2 and F.3**, respectively. In terms of total annual rainfall (TARF), WY05 was a “Very Wet” (TARF > 20”) hydrologic year, whereas WY07 and WY18 were “Very Dry” years (TARF < 5”). WY11, WY15, WY17, WY19 and WY20 were all “Above Normal” rainfall years (12-15”) while WY09 and WY10 (8-12”) were considered “Normal”. The 16-yr ADF in the East and West sections are 18 and 32 cfs, respectively; values that are 15-20 percent below long-range ADFs at the two stations. WY20 total rainfall of 13.60 inches (345 mm) is 37% above the long-range average while average daily flow for this year was 17% above the long-range (55-yr) norm of 28.4 cfs (18 mgd).

Monthly discharge data (min, max and average daily flow) for the two USGS gauging stations extending from Oct. 2004 through Oct. 2020 are plotted in **Chart F.1**. Average daily flow (ADF) for the Lower San Diego River varies from less than 0.2 cfs (0.1 mgd) during the summer (dry) months to nearly 220 cfs (142 mgd) during several winter (wet) periods in the East (Santee Basin) and up to 390 cfs (252 mgd) in the West (Mission Valley) section. Running average ADF values, trending downward in WY12-WY14 increased in WY15, fell in WY16 and WY18, then increased in WY17, WY19 and WY20 as expressed on **Charts F.1 and F.3**.

Table F.1 - Lower SDR Average Daily Flow (WY20 and 16-yr Norms)

Season	West - Mission Valley		East - Santee Basin		LSDR ^(a)	
	WY20	16-yr	WY20	16-yr	WY20	16-yr
Fall (Oct-Nov)	6.5	(7.7)	3.6	(3.9)	4.5	(5.0)
Winter (Dec-Mar)	66.1	(70.2)	24.0	(37.0)	39.1	(46.7)
Spring (April-May)	145.3	(25.9)	67.3	(14.8)	92.5	(17.7)
Summer (June-Sept)	3.5	(3.2)	2.8	(1.8)	2.7	(2.1)
Annual ADF ^(b) , cfs	48.5	(29.6)	20.8	(16.3)	30.1	(20.0)
Wet Season (Nov-April)	90.0	(55.0)	37.1	(29.1)	55.2	(36.6)
Dry Season (May-Oct)	7.0	(5.1)	4.5	(3.0)	5.0	(3.5)
Annual Discharge, AFY ^(c)	35,114	(21,430)	15,059	(11,800)	21,792	(14,480)

(a) Lower San Diego River average daily flow represents a mean hydrologic condition based on averaging the two USGS gauging station flow values.

(b) ADF values are expressed in cubic feet per second (cfs) and million gallons per day (mgd); 1 cfs = 0.646 mgd.

(c) Total annual discharge volume expressed in thousand acre-feet (1 AF = 325,900 gallons); WY20 and 16-Yr averages.

Table F.2 - Rainfall and Long-Term Average Daily Flow (1914-2020)

Type	# of Years	Percent of Total Years	Total Annual Rainfall ^(a)			Average Daily Streamflow, cfs		
			inches	mm	Avg., mm	East ^(b)	West ^(c)	LSDR
Very Wet	3	3%	>20	>500	580	68	113	92
Wet	10	10%	15-20	380-499	430	48	81	66
Above Norm ^(d)	19	18%	12-15	300-379	340	26	44	35
Normal	40	38%	8-12	200-299	250	10	18	15
Dry	26	25%	5-8	125-199	160	7	12	10
Very Dry	7	7%	<5	<125	100	5	9	7
Sum/ An. Avg	105	100%	9.94		250	14.2	23.3	17.4

a) Total annual rainfall from 1 October through September 31.

b) Santee Basin USGS Stream Gauge Station #11022480 at/below Mast bridge near Santee.

c) Mission Valley USGS Stream Gauge Station #11023000 at Fashion Valley Mall; incomplete data prior to 1968.

d) Above normal annual rainfall (12-15 in/yr) resulting in LSDR average daily flows in the 25-50 mgd range.

Table F.3 - Annual Rainfall and Average Daily Flow (WY05-WY20)

(Type of Year)	Annual Rainfall		Variance ^(a)	ADF, cfs (mgd)			Variance ^(d)
	mm	inches		East ^(b)	West ^(c)	LSDR	
WY05 (Very Wet)	574	22.60	127%	50.9 (33)	100 (65)	71.5 (46)	152%
WY06 (Dry)	152	6.00	-40%	10.7 (7)	17.5 (11)	13.6 (9)	-52%
WY07 (Very Dry)	98	3.85	-61%	7.2 (5)	12.8 (8)	9.5 (6)	-67%
WY08 (Dry)	183	7.20	-28%	13.3 (9)	25.0 (16)	18.2 (12)	-36%
WY09 (below normal)	232	9.15	-8%	15.0 (10)	27.2 (18)	20.1 (13)	-29%
WY10 (above normal)	282	11.10	12%	25.1 (16)	42.5 (27)	32.4 (21)	14%
WY11 (above normal)	323	12.70	28%	43.3 (28)	61.9 (40)	46.9 (30)	65%
WY12 (Dry)	201	7.91	-20%	10.1 (8)	19.0 (12)	14.9 (10)	-48%
WY13 (Very Dry)	166	6.56	-34%	8.2 (5)	10.9 (7)	9.1 (6)	-68%
WY14 (Very Dry)	129	5.06	-49%	4.3 (3)	6.1 (4)	5.1 (3)	-82%
WY15 (above normal)	302	11.91	20%	7.1 (5)	15.2 (10)	10.5 (7)	-63%
WY16 (Dry)	208	8.20	-18%	12.2 (8)	24.4 (16)	15.6 (10)	-45%
WY17 (above normal)	323	12.73	28%	27.7 (18)	57.3 (37)	40.0 (26)	41%
WY18 (Very Dry)	83	3.34	-67%	5.0 (4)	7.2 (5)	5.9 (4)	-79%
WY19 (above normal)	324	12.83	29%	20.0 (13)	36.9 (24)	27.0 (17)	-4%
WY20 (above normal)	345	13.60	37%	22.5 (14)	48 (31)	33.1 (21)	17%
16-yr Norm (05-20)	232	9.41	-8%	17.7 (6)	31.8 (20)	23.3 (14)	-20%
55-yr AADF	252	9.92	0%	21.8 / (14)	36.7 (24)	28.4 (18)	0%

a) Percent difference from 55-yr average annual rainfall (252 mm/yr or 9.92 in/yr); black-above, red-below average.

b) Santee Basin USGS Stream Gauge Station 00067556 at Mast Rd., Santee.




c) USGS Stream Gauge Station 00459999 at Fashion Valley Mall; incomplete data prior to 1965.

d) Percent difference from average annual daily flow (AADF).

Monthly and seasonal average annual flow (lines) and rainfall (bars/columns) over the monitoring period for both stations are shown in **Chart F.2**. The seasonal flow patterns express range, variance and positive correlation in monthly ADF and rainfall over the past 16 years. Winter season flows within the lower watershed are several hundred times greater than summer, dry-season flow.

Average annual, winter and summer flows and rainfall are expressed graphically in **Chart F.3**. Highest flows during the 16-yr monitoring period at both gauging stations were recorded in WY05 (very wet year); the lowest in WY14 (very dry year). Water years '06, '07, '08, '12, '13, and '14 were all below normal, witnessing both below average rainfall and stream discharge. Water years '10, '11, '15, and '17 were slightly above normal in terms of total annual rainfall (verticle bars) and average daily streamflow (lines). WY19 witnessed above normal rainfall but below normal streamflow whereas WY20 flows and rainfall were both above.

Lower San Diego River WY20 Water Quality Monitoring Report Appendices A-H

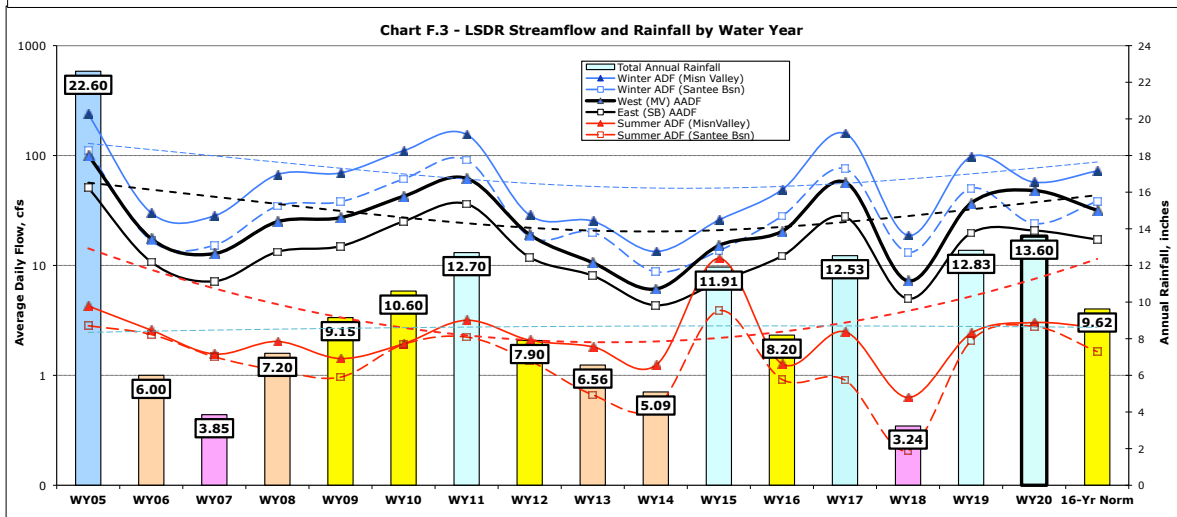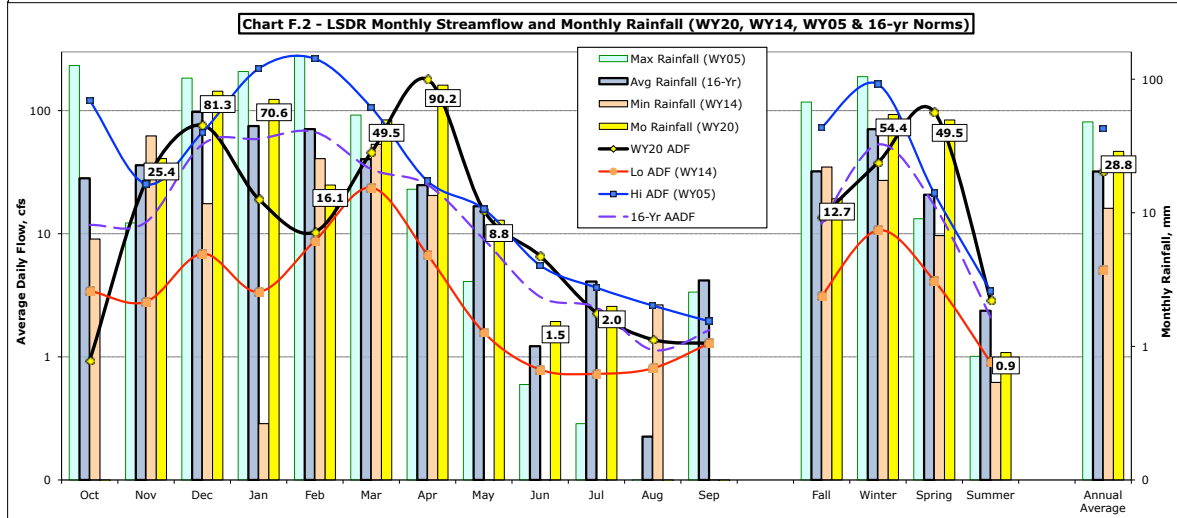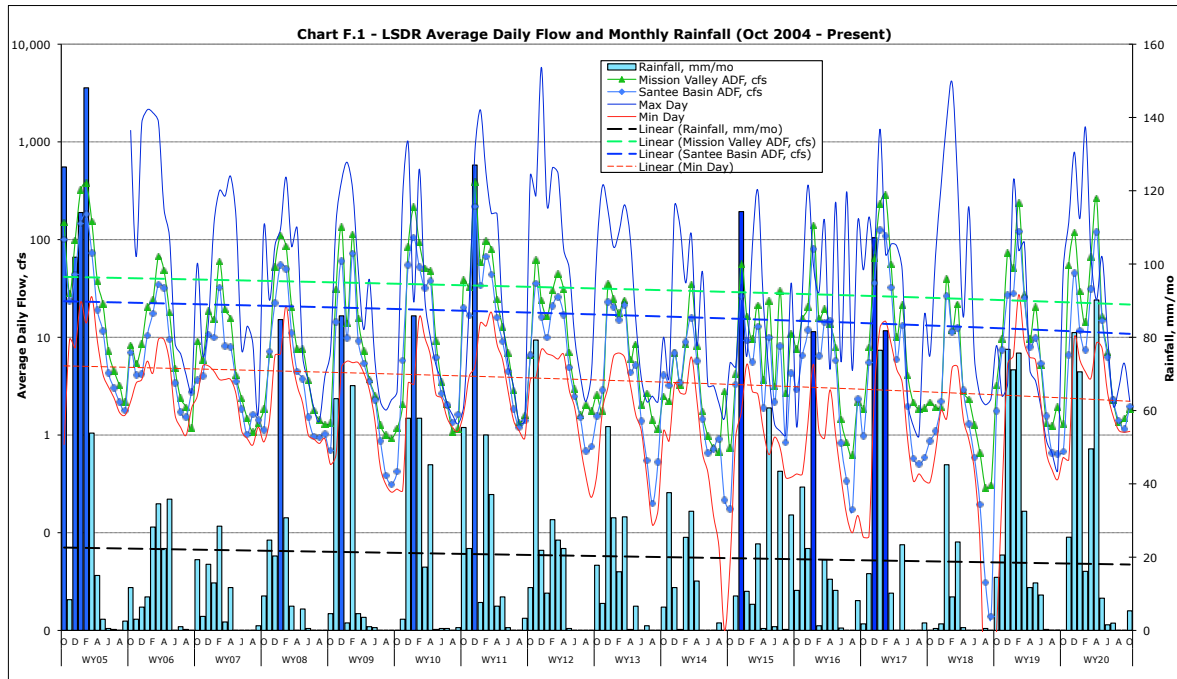

Appendix G - WY20 LSDR Monthly WQM Site Data

Appendix G consists of six tables listing WY20 RiverWatch water quality monitoring data by month and site. Tables G.1(W) and G.1(E) present water temperature recordings. Tables G.2 (W&E) -Specific Conductance, Tables G.3 - pH, G.4 - Dissolved Oxygen Concentration, G.5- DO as Percent of Saturation and G.6 Nutrients (NO₃ & PO₄) at selected sites.

Table G.1(W) West Section Water Temperature (WY20 Readings)

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	24.4	19.8	20.7	20.5	16.0	18.3	18.8
Nov	18.4	17.5	17.8	18.0	14.4	16.0	16.5
Dec	13.2	12.1	12.1	11.8	11.6	11.8	11.4
Jan	12.8	12.6	12.5	12.4	11.7	12.0	11.6
Feb	16.6	16.5	16.5	15.7	15.2	15.7	15.5
Mar	18.3	16.7	17.2	16.6	18.3	16.9	17.5
Apr	17.5	17.2	17.6	17.7	16.9	17.2	17.6
May	21.5	21.2	21.5	21.5	20.8	21.0	20.9
Jun	23.1	23.0	23.0	23.2	22.3	23.1	23.2
Jul	28.9	27.3	26.6	27.1	23.2	26.2	24.4
Aug	29.2	27.5	26.6	28.1	23.4	25.9	25.9
Sept	24.0	23.0	23.9	23.5	20.7	21.2	23.2
WY20	20.7	19.53	19.66	19.67	17.87	18.78	18.87
<i>Norn</i>	19.7	19.0	19.2	19.7	17.2	18.3	18.1

a) All values expressed in °C; WY20 averages greater than 16-yr norms (in parentheses) are shown in red; below in blue.

b) Water year results are based on unweighted averaging of monthly data (Oct-Sept); water temps >22°C are in tan cells; values < 15°C within blue.

Table G.1(E) Mid and East Section Water Temperature (WY20 Readings)

Site	8	9T	10	11	12T	13	14	15T
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB ^c
Oct	16.3	15.3	17.6	17.5	21.4	18.6	20.5	17.7
Nov	16.6	13.8	14.5	16.0	18.6	14.3	17.3	15.1
Dec	9.2	8.2	8.8	9.9	12.8	10.9	12.3	9.6
Jan	11.3	13.7	11.1	12.0	12.4	11.1	12.0	11.6
Feb	13.9	12.7	13.7	13.3	16.8	12.8	15.1	15.2
Mar	16.9	16.4	16.6	16.4	17.0	16.3	16.6	14.2
Apr	19.2	19.1	16.0	16.3	18.7	17.3	16.8	16.7
May	19.5	17.5	18.0	17.3	19.9	18.9	20.2	18.7
Jun	21.1	17.4	21.2	20.0	21.6	21.1	23.1	21.5
Jul	23.3	18.9	24.3	21.4	-	23.5	26.6	23.1
Aug	23.4	21.4	25.1	22.7	-	25.1	28.7	24.1
Sep	23.3	19.8	21.8	20.3	=	21.3	23.9	20.5
WY20 ^b	17.83	16.18	17.39	16.93	17.68	17.59	19.42	17.33
Norm	17.16	15.78	17.66	16.70	17.74	18.37	17.58	18.01

a) All values expressed in oC; WY20 values greater than 16-yr norms are shown in red; below in blue.

b) Water year WY20 and 16-yr values are based on unweighted averaging monthly data (Oct-Sept); water temps >22oC in tan cells, <15oC blue cells.

c) Forester Creek discharges within the Lower Santee Basin reach at the west end of Carlton Hills Golfcourse just upstream of Site 11.

Table G.2(W) West Section Specific Conductance (WY20 Readings)

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	10.75	3.88	3.54	3.18	3.69	3.78	3.03
Nov	22.77	4.00	3.75	3.26	3.93	4.03	2.99
Dec	22.62	1.96	1.86	1.91	1.91	1.71	1.92
Jan	2.12	2.02	2.01	2.04	1.88	1.86	1.96
Feb	2.74	2.47	2.36	2.19	1.96	2.15	2.05
Mar	3.97	1.12	1.05	1.03	1.16	1.16	1.24
Apr	1.23	0.93	0.92	0.93	0.86	0.87	0.92
May	2.71	2.42	2.32	2.32	2.25	2.10	2.12
Jun	4.68	2.88	2.80	2.70	2.83	2.52	2.46
Jul	6.45	3.23	3.14	3.15	3.28	2.92	2.90
Aug	26.56	3.64	3.48	3.32	3.47	3.40	3.44
Sep	44.35	4.16	3.37	2.95	3.37	3.40	3.05
Avg^b	12.579	2.547	2.550	2.415	2.549	2.492	2.340
Norm	8.682	2.641	2.541	2.453	2.590	2.586	2.461

a) All values expressed in milli-Siemens/cm; SpC values >4.0 are in tan cells, values < 2.0 mS/cm are in blue cells.

b) WY20 annual average values greater than 16-yr norms are in red; blue values below.

Table G.2(E) Mid and East Section Specific Conductance (WY20 Readings)

Site	8	9T	10	11	12T	13	14	15T
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB ^c
Oct	3.13	5.37	3.00	2.91	2.06	2.50	1.81	2.76
Nov	2.05	4.63	2.08	2.10	1.89	1.38	1.12	2.88
Dec	1.82	3.32	1.85	1.84	0.92	1.40	0.86	2.31
Jan	1.97	4.29	2.00	2.12	0.97	1.55	1.16	2.66
Feb	1.11	3.02	1.19	1.26	0.69	1.07	0.88	0.99
Mar	0.89	2.21	1.01	1.08	0.50	0.63	0.62	2.63
Apr	1.24	2.93	1.28	1.39	0.57	1.11	1.01	2.55
May	1.87	4.16	1.88	2.00	0.71	1.67	1.44	2.63
Jun	2.38	4.85	2.44	2.59	-	1.91	1.59	2.89
Jul	2.66	4.88	2.65	2.72	=	2.09	1.66	2.84
Aug	2.66	4.62	2.58	2.54	-	1.99	1.55	2.68
Sep	3.13	5.37	3.00	2.91	2.06	2.50	1.81	2.76
WY20 ^b	2.110	4.130	2.078	2.114	1.132	1.640	1.286	2.539
<i>Norm</i>	2.308	4.811	2.245	2.233	1.615	1.904	1.488	2.687

a) All values expressed in milli-Siemens/cm; WY20 values greater than 16-yr norms are in red, below in blue. Cells in blue <2.0: cells in tan >4.0 mS/cm

b) WY20 annual averages and 16-yr norms are based on averaging of monthly data (Oct-Sept);

c) Forester Creek discharges within the Lower Santee Basin enter SDR beyond the west end of Carlton Hills Golf Course.

Table G.3(W) West Section pH (WY20 Readings)

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	7.82	7.65	7.84	7.79	7.48	7.47	7.30
Nov	7.50	7.50	7.50	7.50	7.50	7.50	7.50
Dec	7.70	7.75	7.94	7.78	7.71	7.73	7.67
Jan	7.89	7.75	7.83	7.77	7.73	7.63	7.60
Feb	7.80	7.78	-	-	7.77	7.64	-
Mar	7.75	7.70	7.79	7.85	7.84	7.92	7.60
Apr	7.75	7.77	7.73	7.74	7.74	7.58	7.69
May	8.03	7.83	8.03	7.95	7.84	7.28	7.81
Jun	7.58	7.81	7.87	7.86	7.71	7.64	7.68
Jul	7.98	8.01	7.99	8.02	7.71	7.80	7.85
Aug	7.99	7.93	7.92	8.15	7.36	7.58	7.81
Sep	8.14	8.10	8.14	8.25	7.94	7.89	8.05
WY20 ^b	7.83	7.80	7.87	7.88	7.69	7.64	7.69
<i>Norm</i>	7.76	7.69	7.77	7.79	7.63	7.62	7.56

a) All values are unit-less; monthly values above 8.0 are in tan cells, and those below 7.5 in pink.

b) WY20 and 16-yr annual average values based on averaging monthly results (Oct-Sept); annual averages >16-yr norms are shown in blue; below norms in red.

Table G.3(E) Mid and East Section pH (WY20 Readings)

Site	8	9T	10	11	12T	13	14	15T
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB ^c
Oct	7.57	8.24	7.45	7.28	7.60	7.42	7.86	7.85
Nov	7.53	8.13	7.63	7.27	7.89	7.18	7.63	7.82
Dec	8.11	8.38	7.57	7.36	7.94	7.46	7.77	8.34
Jan	8.14	8.31	7.70	7.51	7.90	7.50	8.02	8.11
Feb	8.13	8.42	7.70	7.29	8.07	7.35	8.08	8.17
Mar	8.14	8.49	8.05	7.85	8.06	7.55	7.96	8.05
Apr	8.20	8.50	7.95	8.02	7.90	7.64	7.88	8.29
May	8.13	8.44	7.78	7.85	7.97	7.81	8.02	8.19
Jun	8.07	8.29	7.79	7.71	7.92	7.48	8.04	8.05
Jul	8.08	8.27	7.97	8.02	-	7.80	8.26	8.18
Aug	7.60	8.29	7.92	7.67	-	7.65	8.23	8.05
Sep	8.13	8.44	8.13	8.06	-	8.14	8.23	8.24
WY20 ^b	7.99	8.35	7.80	7.66	7.92	7.58	8.00	8.11
<i>Norm</i>	7.68	7.87	7.81	7.55	7.93	7.65	7.83	8.05

a) All pH values are unit-less; monthly values above 8.0 are in tan cells, and below 7.5 in pink.

b) WY20 annual average and 16-yr norms are based on averaging of monthly data (Oct-Sept); averages > 16-yr norms are shown in blue; below norms in red.

c) Forester Creek discharges within the Lower Santee Basin section of the river downstream of Carlton Oaks Golf course; just upstream of Site 11.

Table G.4(W) West Section Dissolved Oxygen Concentration (WY20 Readings)

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	5.38	2.60	3.09	4.92	2.32	0.07	4.15
Nov	4.63	3.60	3.42	6.03	3.24	0.80	4.27
Dec	8.12	9.03	10.80	10.55	8.02	8.45	9.66
Jan	10.23	8.10	9.01	7.93	8.55	8.42	9.94
Feb	5.53	6.15	6.72	5.20	6.17	5.00	7.75
Mar	6.22	5.54	6.04	5.99	7.55	6.04	8.52
Apr	6.59	5.82	6.39	5.82	6.41	6.44	7.57
May	6.49	4.74	3.36	7.04	3.90	2.53	5.29
Jun	4.72	4.14	2.90	4.18	3.18	1.78	4.18
Jul	5.27	3.49	3.30	3.50	2.48	1.67	3.50
Aug	8.33	3.35	5.32	7.79	2.90	0.43	5.06
Sep	6.32	3.71	3.38	5.88	3.10	1.20	5.11
WY20	6.49	5.02	5.31	6.24	4.82	3.57	6.25
Norm	6.15	4.42	4.64	6.11	4.77	3.56	5.08

a) All values expressed in milligrams/liter and (Percent of Saturation); WY20 and 16-yr averages less than 5 mg/L (DO depletion threshold) shown in red, less than 2.5 mg/L (hypoxic level) cells highlighted in light yellow and <1.0 mg/L (exaerobic zone) in dark yellow. DO levels of 7.0 mg/L or greater are shown in blue cells.

Table G.4(E) Mid and East Section Dissolved Oxygen Concentration (WY20 Readings)

Site	8	9T	10	11	12T	13	14	15T
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB ^c
Oct	2.94	8.40	4.81	4.22	5.47	2.67	2.03	4.80
Nov	6.86	7.30	6.79	4.95	5.66	0.09	2.55	6.17
Dec	12.12	12.47	9.34	9.21	7.27	1.79	2.89	9.55
Jan	11.53	10.52	9.33	7.92	8.18	0.45	5.93	9.51
Feb	10.20	11.30	8.71	7.85	8.78	0.11	7.66	8.51
Mar	8.60	10.30	6.01	7.27	7.31	0.92	9.94	8.18
Apr	8.57	9.49	5.77	6.90	8.41	2.00	4.07	9.80
May	7.65	9.65	3.75	5.71	7.78	1.55	4.10	6.80
Jun	6.73	9.04	2.27	4.76	6.32	1.42	2.99	4.30
Jul	4.44	8.18	5.80	4.82	-	1.24	3.64	6.05
Aug	3.51	10.26	5.76	5.32	-	0.89	5.16	4.76
Sep	7.00	9.70	5.58	4.66	-	1.57	3.51	5.86
WY20 ^b	7.51	9.72	6.16	6.07	7.24	1.23	4.54	7.03
<i>Norm</i>	7.29	9.21	6.99	5.89	7.09	2.84	3.39	7.41

a) All values expressed in milligrams/liter; WY20 values less than 5 mg/L (DO depletion threshold) are expressed in red, < 2.5 mg/L (hypoxic level) cells highlighted in light yellow and <1 mg/L (anaerobic zone) dark yellow. DO levels of 7.0 mg/L or greater are shown in blue cells,

b) WY20 annual average and 16-yr normss are based on averaging of monthly data (Oct-Sept).

c) Tributary discharges within the Lower Santee Basin reach enter below the west end of Carlton Oaks Golf Course.

Table G.5(W) West Section DO Percent of Saturation (WY20 Readings)

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	65	29	35	55	24	1	45
Nov	49	38	37	64	32	8	44
Dec	77	80	101	99	74	78	89
Jan	97	77	85	75	79	78	92
Feb	58	65	69	54	62	50	79
Mar	67	57	64	62	80	63	84
Apr	70	61	67	62	67	67	80
May	74	55	39	83	45	29	61
Jun	56	50	35	50	37	21	50
Jul	68	45	42	44	27	20	42
Aug	107	43	66	100	35	5	63
Sep	70	44	41	70	34	14	59
WY20	71.5	53.7	56.7	68.2	49.8	36.3	65.6
<i>Norm</i>	67.3	46.3	48.9	65.8	48.8	36.4	52.4

a) All values expressed as percent of saturation; WY20 values < 55% (DO depletion threshold) are expressed in red, < 25% (hypoxic level) cells highlighted in light yellow and < 10% (anaerobic zone) dark yellow. DO% Sat values of 70 or greater are shown in blue cells.

Table G.5(E) Mid and East Section DO Percent of Saturation (WY20 Readings)

Site	8	9T	10	11	12T	13	14	15T
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB ^c
Oct	31	85	49	45	62	29	23	51
Nov	87	56	68	51	61	1	27	61
Dec	106	107	81	78	69	17	27	85
Jan	107	103	86	74	78	4	55	88
Feb	100	108	85	76	90	1	77	86
Mar	84	106	61	75	76	9	103	81
Apr	95	103	58	71	92	21	42	102
May	85	102	39	60	86	18	46	73
Jun	75	91	26	52	71	17	35	48
Jul	53	89	70	55	-	17	46	71
Aug	40	117	69	62	-	11	67	58
Sep	83	108	64	52	-	17	42	66
WY20 ^b	78.7	97.9	63.1	62.6	79.8	13.6	49.2	72.5
<i>Norm</i>	74.3	93.5	72.7	59.5	71.6	29.3	34.0	71.0

a) All values expressed as percent of saturation; WY20 values < 55% (DO depletion threshold) are expressed in red, < 25% (hypoxic level) cells highlighted in light yellow and <10% (exaerobic zone) dark yellow.. DO% Sat values of 50 or greater are shown in blue cells.

b) WY20 annual average and 16-yr norms are based on averaging of monthly data (Oct-Sept).

Table G.6 WY20 Nutrient (NO₃/PO₄) Readings at Selected Sites

Site #	2-YMCA	7-ABF	11-WHPE	14E-MPE	14W-MPW	15-FCK
Section	Mission Valley		Santee Basin			
Oct	0.0/0.4	0.0/0.1	0.2/ 0.6	0.1/0.2	-	1.0 /0.3
Nov	-	-	0.3/0.4	0.0/0.4	-	1.3 /0.1
Dec	0.0/0.3	0.0/0.1	0.6/0.2	0.3/ 0.6	-	3.4 /0.1
Jan	0.0/0.1	0.0/0.0	0.3/0.2	0.1/0.2	-	0.13/0.3
Feb	-	-	0.2/0.1	0.0/0.1	-	0.0/0.1
Mar	0.0/0.25	0.2/0.4	0.3/0.25	0.0/0.1	-	0.7 /0.15
Apr	-	-	-	-	-	-
May	0.0/ 0.65	0.0/0.9	-	-	-	-
Jun	-	-	-	-	-	-
Jul	-	-	-	-	-	-
Aug	0.05/ 0.8	0.08/0.1	0.2/ 0.8	0.1/ 0.8	0.1/ 0.6	0.8/0.6
Sep	0.1/0.4	0.1/0.3	0.1/0.4	0.01/0.1	0.1/0.1	0.9 /0.4

a) All nutrient values (Nitrogen as NO₃/Phosphate as PO₄) expressed in mg/L. Nutrient concentrations >0.5 mg/L, indicating a cause for concern, are shown in red.



Appendix H - Water Quality Indexing

The Lower San Diego River (LSDR) Water Quality Index (WQI) has been developed for the purpose of providing a simple and concise expression of regularly monitored physical-chemical and bacteriological water quality data compiled by the SDRPF RiverWatch Team and others. The index is intended to aid in assessment of the LSDR watershed, primarily for non-body contact recreational uses and environmental enhancement. As designed, the metric constitutes a means to compare averages, variances and trends in normalized values over time (temporally) and by relative location (spatially) within the watershed. The index allows one to interpret large amounts of aggregated data and relate overall water quality variations to changes, be they from natural causes or anthropogenic impairments. The WQI has been used to identify general water quality trends over the past 16 years of monitoring and potential problem areas within the LSDR watershed. Such patterns and locations are then screened and evaluated in greater detail through direct observation of pertinent site-specific data by public agencies and water quality professionals entrusted with protection and enhancement of the environment. Used in this manner, the index provides an additional metric for evaluating effectiveness of some of the San Diego River water quality improvement programs and may also assist responsible agencies and organizations in reformulating priorities or updating specific policies.

Running average WQI values from WY05 through WY20 are expressed by river section and reach on charts H.1 and H.2, respectively. The overall temporal variance in WQI values and streamflow are expressed in Chart H.3. The spacial variance in index values for the lower river monitoring sites is shown on Chart H.4.

Chart H.1 provides the range (max.=green - min.= red) in monthly values, the running averages by river section as well as monthly streamflow (blue bars) over the 16-yr period (WY05-WY20_ of RiverWatch monitoring. The positive correlations in seasonal fluctuation between streamflow and water quality values are shown. General trends of lower water quality at all sites in years of below average stream discharge are evident. The overall (heavy black line) general decline in the index over 16 years is shown as a dashed line. Although the average annual rate of decline in the index is on the order of one percent; WYs 19 & 20 have witnessed a measurable recovery from WY18 near-minimum values. The current running average index of 32.4 is three percent above the 16-year norm of 31.3. The WY18 index of 22.4 was 28% below the current 16-yr norm. The lowest running average index value of 19 was reached in October of 2014; 39 percent below the 16-yr norm

Chart H.2 presents overall (LSDR) monthly running avearge WQI values (heavy black lines) over the 16-year period. Seasonal patterns expressed in monthly results and trends described by running averages in values are apparent for each reach of the river. The water quality fluctuations over time in individual reaches, sections and the overall LSDR flow-weaighted values expressed on both a running average and seasonal cycle basis can be observed. The Upper Santee Basin (USB) reach (red line sites 13&14) have presented the lowest index values since March of 2010, whereas Mission Gorge (blue line=mid-section of the lower river watershed) consistently presents highest values. It can also be noted (in both charts H1 & H2) that the greatest rate of decline in lower river water quality occurred over a three year period (WY12 through WY 14) during a period of well-below normal streamflow.

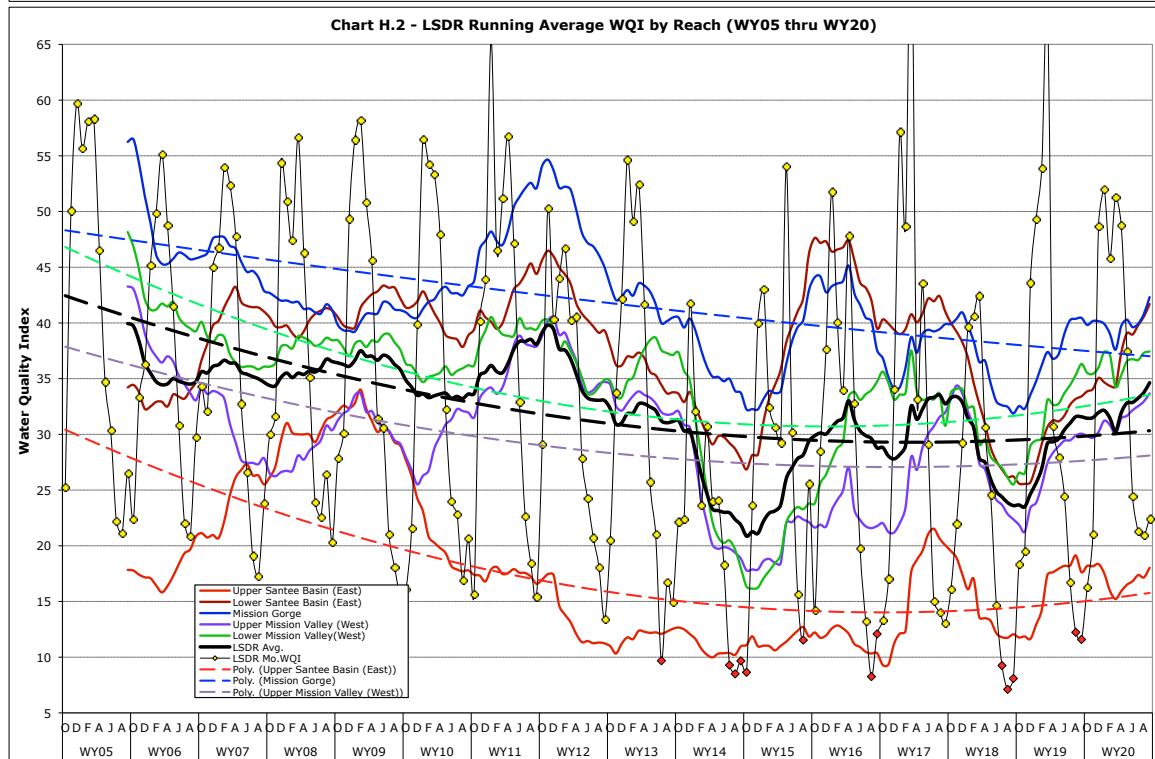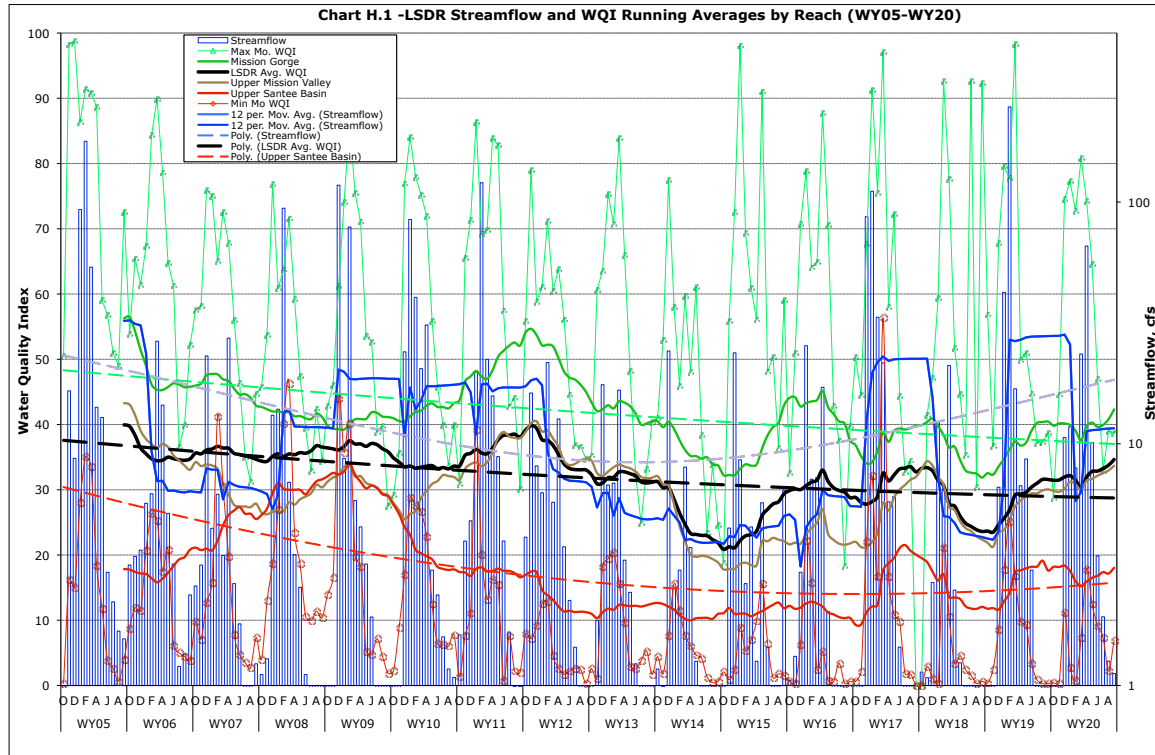

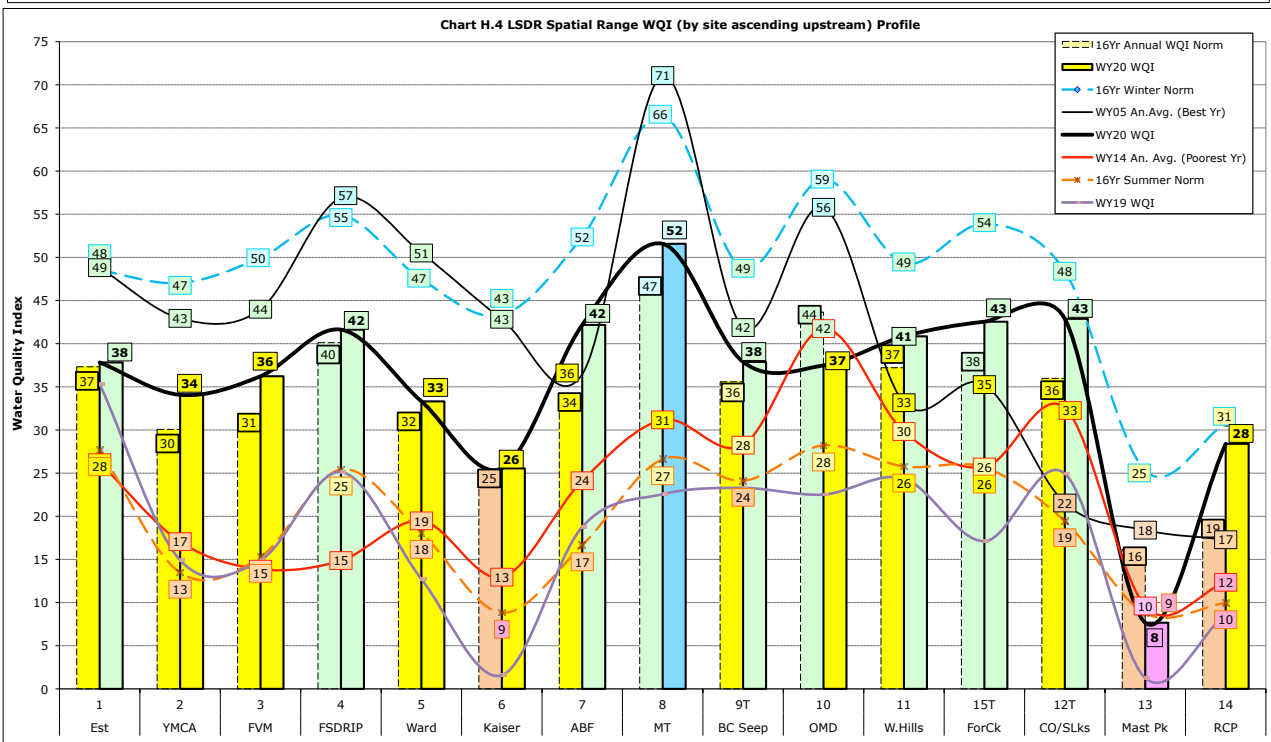
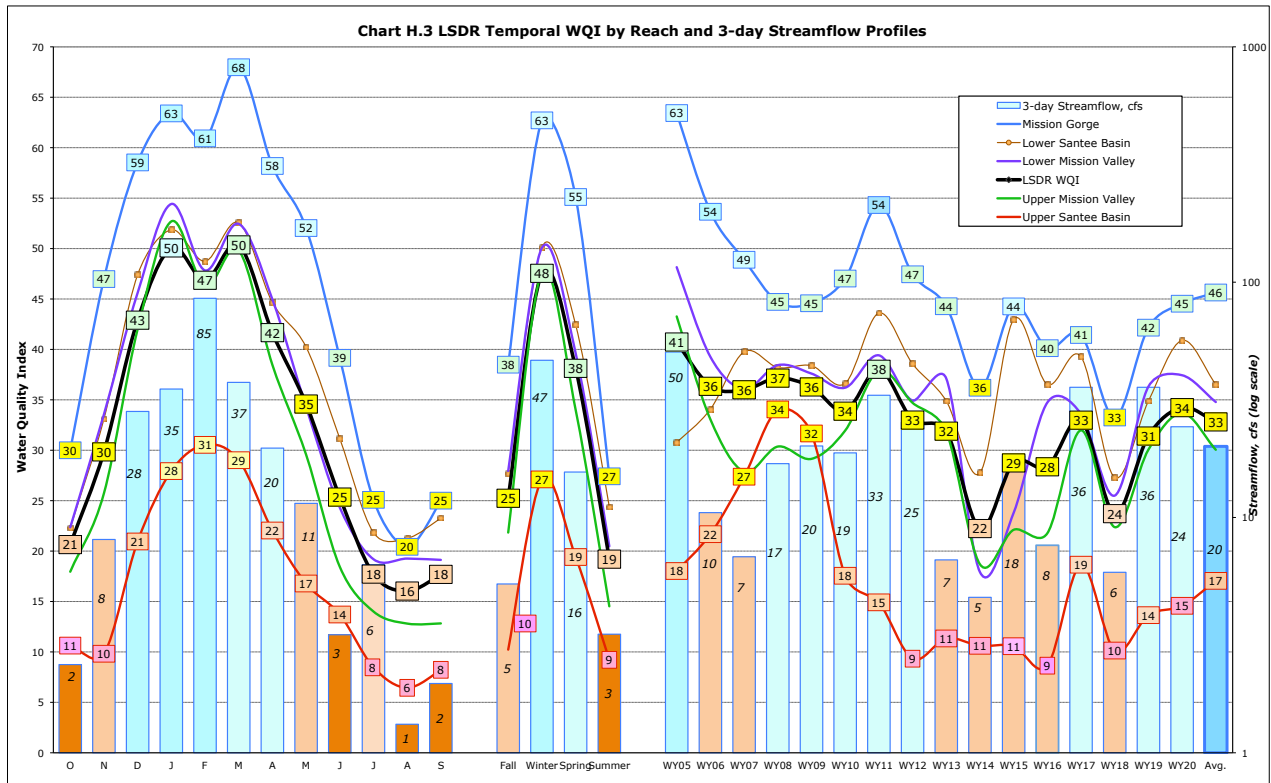


Chart H.3 presents a temporal summary of variances in the water quality index values profiled on a monthly, seasonal and average annual water year basis for the five river reaches and the overall weighted LSDR averages. The variances in WQI can be visually compared to changes in 3-day streamflow (blue bars) on the same basis. Positive correlations are evident, i.e., increased average daily flow results in improved water quality metrics. Low flow throughout the summer months results in considerably poorer water quality. The past two year's of above average dry-weather (base) flows, extending from early April through the end of September, resulted in significant improvements in index values for each of the five reaches and overall (heavy black line) of the lower river system from WY18 and WY14 results. Irrespective of the water year the Mission Gorge reach (blue curve) has presented the highest WQI values while the Upper Santee Basin reach (red curve) has (with exception of WY's 07 & 08) has shown the lowest values. The next to poorest quality reach is the Upper Mission Valley reach (green curve). The next to best water quality reach is the Lower Santee Basin reach (brown curve). On a seasonal basis Autumn and Summer results are consistently lower than Winter (highest) and Spring (next highest) values in all reaches and overall. August is the month of lowest water quality and lowest flow. January and March are commonly the months of best water quality in all reaches as greater flood flows commonly occurring in February often lower WQI values by several points.

Chart H.4 provides a spatial profile of average annual WQI by river monitoring site, reach and section for this year (WY20), compared to last year (WY19), the best (WY05), the worst (WY14) and 16-yr winter (Dec-Jan), summer (Jun-Sept) and annual (Oct-Sept) norms. The sites are in the order they occur ascending upstream. The current (WY20) average annual WQI values for each site, shown as both a heavy black line and as colored bars, are above annual norms (also dashed color bars) at all but two sites (#10-OMD and #13-Mast Pk E). Sites with lowest water quality in WY20, as well as over the past decade, are #13-Mast Pk E, #14-Magnolia Ave. within the Upper Santee Basin (red curve) and #6-Kaiser Ponds in Upper Mission Valley (green curve). The Mission Gorge portion (blue curve) of the watershed (site #'s 8-10) continues to demonstrate best overall water quality. The 16-yr winter and summer WQI norms (dashed blue and red curves, respectively) are also shown in profile to provide a basic appreciation of the range in index values occurring throughout the lower river system extending some 23 miles from Lakeside to the estuary in lower Mission Valley between I-5 and Pacific Highway.

Monthly and running average WQI values for each reach of the lower river and overall are presented in Section 5 of the WY20 Annual WQM Report (see Charts 5.1-5.6) together with discussion of the individual trends associated with each. It is becoming apparent that a number of some reaches of the river experience water quality changes more rapidly than others and that several sites represent "hotspots" of poorer water quality, less susceptible to change in ambient conditions.

(JCK 11/08/2020)