

LOWER SAN DIEGO RIVER WATER QUALITY  
WY25 Water Quality Monitoring Report (Appendices A-H)



*Creeping Water Primrose (Ludwigia Pepiloides) growth at Admiral Baker Field  
(WQM Site #7, mid-June, 2025)*

Water Quality Monitoring Data and Supporting Information  
John C. Kennedy, P.E.

# LOWER SAN DIEGO RIVER WY25 WATER QUALITY REPORT APPENDICES A-H

## *Table of Contents*

<b>A. RiverWatch Water Quality Monitoring Program .....</b>	<b>3-7</b>
Table A.1 LSDR Sections, Reaches and Monitoring Sites	
Table A.2 - LSDR WQM Site Parameters	
Table A.3 - LSDR Water Quality Monitoring Locations	
Figure A.1 - Lower San Diego River Catchment Area and WQM Sites	
<b>B. SD River Hydrology in Relation to Water Quality .....</b>	<b>8-11</b>
Table B.1 - Lower SDR Average Daily Flows (WY05-WY25)	
Table B.2 - Rainfall and Long-Term Streamflow (1914-2025)	
Table B.3 - Annual Rainfall and Average Daily Flows (WY05-WY25)	
Charts B.1 - B.3 - LSDRiver Hydrologic Data	
<b>C. Monthly WQM Site Data for WY24/WY25 .....</b>	<b>12-22</b>
Table C.1 West, Mid & East Section Water Temperature Data	
Table C.2 West, Mid & East Section pH Data	
Table C.3 West, Mid & East Section Specific Conductance Data	
Table C.4 West, Mid & East Section Dissolved Oxygen Concentration Data	
Table C.5 West, Mid & East Section DO Percent of Saturation Data	
Table C.6 Nutrient (NO3 and PO4) Data at Designated Monitoring Sites	
<b>D. Water Quality Index Values .....</b>	<b>23-26</b>
Table D.1 WY25/24 WQI Values by Monitoring Site - West Section	
Table D.2 WY25/24 WQI Values by Monitoring Site - Mid & East Sections	
Chart D.1 LSDR Running Average WQI by Reach (WY05-WY25)	
Chart D.2 LSDR Streamflow and WQI Running Averages (WY05-WY25)	
Chart D.3 LSDR Temporal WQI Profiles and Streamflow	
Chart D.4 LSDR Spacial WQI Profiles	
<b>E. Variance and Trends in Running Average WQM Metrics (WY05-WY25).....</b>	<b>32-35</b>
Chart E.1 Variance and Trends in Running Average Water Temperature	
Chart E.2 Variance and Trends in Running Average Specific Conductance	
Chart E.3 Variance and Trends in Running Average pH	
Chart E.4 Variance and Trends in Running Average Dissolved Oxygen	
Chart E.5 Variance and Trends in Running Average WQIndex	
Chart E.6 Variance and Trends in Running Average WQM Metrics	
<b>F. San Diego RiverWatch Program Monitoring Team Members .....</b>	<b>27</b>
<b>G. Glossary of Abbreviations, Terms and Equations .....</b>	<b>28</b>
<b>H. References .....</b>	<b>29-31</b>

## Appendix A

### RiverWatch Water Quality Monitoring Program

Appendix A provides an overview of SDRPF’s RiverWatch water quality monitoring (WQM) program teams that have been engaged in collecting and assessing basic data regarding the Lower San Diego River (LSDR) watercourse on a continuous, monthly basis since Sept. 2004.

**Monitoring Period & Coverage:** Monthly monitoring over past 21 years (Oct. 2004 – Sept. 2025) covering the main course of the San Diego River and tributary streams extending some 18 miles downstream from Lakeside (elev. 340 ft amsl) to the Estuary (elev. 5 ft amsl) just below the I-5/ Pacific Hwy. overpasses that is nearly 3 miles inland from the river’s mouth entering the Pacific Ocean at Dog Beach. The lower river watershed monitoring site locations are shown on **Figure A.1**.



**Figure A.1 - Lower San Diego River Drainage Area and WQM Sites**

*Color Code for LSDR reaches on figure above: Estuary (orange), LMV (purple), UMV (red), MG (dark green), LSB (violet), USB (dark blue), Lakeside (light green), key tributaries (light blue). Figure details can be downloaded through Google Earth from SDRPF website/River Monitoring page: file <Fig1.1WQMR.kmz>*

**Monitoring Sites:** 17 total - 14 on main course (Mission Valley Section - sites 1-7, Mission Gorge Section - sites 8-10, Santee Basin Section - sites 11-15) plus three key tributary stream sites are listed in **Table A.1**.

**Table A.1 LSDR Sections, Reaches and WQ Monitoring Sites**

Section/Reach/Tributary	Site #s	Comments
Estuary entrance	1E/1W	Tidal influence at transition from estuary to river
Lower Mission Valley (LMV)	2E/W, 3	3-mile reach of lower river from I-5 to SR163
Mid-Mission Valley (MMV)	4, 5	2-mile reach extending from SR163 to I805
Upper Mission Valley (UMV)	6, 7	3-mile stretch from I-805 to Princess View Dr
West Sites - Mission Valley Section	(1-7)	8-mile western portion through Mission Valley
Mission Gorge (MG) Mid-Section	(8,9T,10)	5-mile midsection, Princess View Dr to Hollis Lk
Lower Santee Basin (LSB)	11,12T,15T	2-mile reach from Hollis Lk to Carlton Hills Blvd.
Upper Santee Basin (USB)	13E/W, 14	3-mile reach from Carlton Hills Blvd to SR67
Santee Basin (SB) Section	(11-15T)	5-mile eastern portion from Mission Trails Regional Park to Lakeside (SR67)
East Sites - MG and SB	(8 -15T)	10-mile upper portions incl. MG and Santee Basin
LSDR Tributaries:		
Murphy Canyon/Qualcom <sup>a)</sup>	{5} <sup>a)</sup>	Enters LSDR southwest of Aztec Stadium
Jackson Dr/Birchcreek Outfall <sup>b)</sup>	9T	Enters LSDR at SD River/ Aqueduct trail crossing (Suycott Wash)
Santee Lakes/E. Sycamore Cnyn Ck	12T	Enters LSDR at Carlton Oaks CC golfcourse (u/s)
Forester Creek <sup>c)</sup>	15T	Enters LSDR at W. Hills Pkwy. (u/s of Site 11)
Lower SDR Watershed (LSDR)	(1-15T)	Weighted average of all 5 reaches / all 3 sections

(a) Monthly monitoring discontinued in WY07; nearby Ward Rd bridge site (originally #6 renumbered as #5).

(b) Monthly monitoring initiated in 2008; site also termed Jackson Dr. Outfall (OF) is along the SDR Xing trail.

(c) Monthly monitoring initiated in 2007 with adjusted site locations in 2009 and 2015 during channel improvements, reverted back to near original location at Mission Gorge Rd. Bridge in 2018.

**WQ Parameters:** Seven key parameters are measured and recorded: Temp, pH, SpC, DO, DO%Sat, two nutrients; nitrogen (as NO<sub>3</sub>) and phosphorous (as PO<sub>4</sub>), plus numerous subjective field observations related to environs and river water characteristics, as listed in **Table A.2**. Nutrient testing is carried out at six river sites; two in West (2, 6) and four in East (11, 13W, 14, 15T). The monitoring data are used in performing statistical analyses regarding each identified reach and section of the river. The number of values for each physical-chemical parameter monitored that are compiled over the 21-year period exceeds several hundred per site providing a firm statistical basis in performing analyses. Two additional parameters compiled at several sites by other entities include streamflow derived from USGS (Poway Office) gauging station data and coliform counts from the SDCoastKeeper database. Both data sets have been used for purposes of computing the LSDR water quality index.

**Protocol:** Eastern Sites – (Santee Basin & Mission Gorge sections). Nine sites located within the three upper reaches (MG, LSB, USB) are typically monitored the 3<sup>rd</sup> Fri. of every month by the RiverWatch East Team. Western Sites - (Mission Valley section). Seven sites within the three

lower reaches (LMV, MMV, UMV) of the watershed are typically monitored by the RiverWatch West Team the 3rd Thursday or every month.

**Table A.2 - LSDR Water Quality Monitoring Parameters**

WQ Parameter	unit	Comments
<i>Measured monthly at all sites:</i>		
1. Temperature (Water Temp)	°C	Basic characteristic and WQ driver (see Table C.1)
2. pH	-	Degree of acidity (<7.0) or alkalinity (>7.0) (see Table C.3)
3. Specific Conductivity (SpC)	mS/cm	Measure of ionic content or dissolved solids (see Table C.2)
4. Dissolved Oxygen (DO)	mg/L	Good indicator of relative water quality (see Table C.4)
5. Percent of DO Saturation (DO%Sat)	%	Good indicator of general water quality (see Table C.5)
<i>Sampled/tested monthly at selected sites: (typically 3-5 East &amp; 2 West)</i>		
6. Nitrate (NO <sub>3</sub> -N)	mg/L	Basic nutrient for biological activity (see Table C-6)
7. Phosphate (PO <sub>4</sub> -P)	mg/L	Key nutrient for biological activity; in excess, can be limiting
8. Turbidity	NTU	General indicator of amount of suspended/settleable solids
9. Barometric Pressure	mBars	Atmospheric (air) pressure that along with water temperature affects dissolved oxygen levels/other readings.
<i>Environmental Observations recorded at all sites:</i>		
Atypical or notable conditions (scum, discoloration, odors, etc.), trash/debris, homeless encampments, biological activity (aquatic, avian, terrestrial), expansion of invasive species, erosion, scouring, other noteworthy comments re: watercourse, shoreline and adjacent environs. Special note as to invasive aquatic plant growth on water surface.		
<i>General WQ Conditions observed at all sites: (numerical coding added in 2010)</i>		
Weather Condition, Presence of Algae, Clarity, Color, Odor, Flow, Foam, Litter, Odor, Oil and Grease (O&G), e		
<i>Parameters measured by others at selected sites</i>		
10. Streamflow	cfs	USGS gauging stations at Fashion Valley and Mast Rd. near Santee (see Table B.1)
11. Coliform counts: (Escheria-coli, Enterococcus, Total Coliform bacteria)	MPN/100mL	SD CoastKeeper data taken at Fashion Valley Rd and Old Mission Historic Dam monitoring sites (see archives).

Team Leaders (1-2) and citizen volunteers (2-6) typically meet at an appointed location, organize field equipment, transportation, drive to sites, measure physical-chemical water quality parameters using a YSI Sonde device, note special conditions/observations, collect samples for subsequent nutrient testing, return to a designated field site or office, perform (NO<sub>3</sub> & PO<sub>4</sub>) tests, store samples for subsequent analyses as needed, clean/check-in/store field equipment and, time permitting, further discuss findings, observations/results.

**Table A-3 - San Diego RiverWatch Water Quality Monitoring Site Locations**

Site #	Site Name	u/s mi.	Elev. ft.	Location	GIS Coordinates	
					Lat.	Long.
LMV - Lower Reach W Mission Valley: I-5 extending 2.5 miles upstream to SR163 (incl. sites 1-3)						
1	Estuary E/W	2.96	6	between PCHwy & I-5 on encased sewer main	32.76131	-117.20373
2	River Gardens E/W	3.50	11	W of YMCA, d/s of trolley at sewer/ped X-ing	32.7623	-117.1944
3	Fashion Valley Mall W	5.08	22	below T&C footbridge by FV Transit Center	32.76517	-117.16869
MMV - Middle Reach Mission Valley: SR163 extending 3.1 miles upstream to I-15 (incl. sites 4,5)						
4M	FSDRIP at Mimi's	5.98	36	d/s on Mission Center Rd. bridge W	32.76986	-117.15482
4E*	FSDRIP at Stadium Way	6.55	40	W side of bridge along left (south) bank	32.7751	-117.13255
5	Ward Rd Bridge	8.89	50	below trolley overpass at Camino. del Rio N	32.78024	-117.11029
UMV - Upper Reach E Mission Valley: I-15 extending 2.5 miles upstream to N end of Admiral Baker Field (Sites 6,7)						
6	Kaiser Ponds	9.46	56	E. of Mission SD de Acala at SD Mission Rd.	32.78406	-117.10419
7	Admiral Baker Field	9.98	58	L - Lower (below Friars Rd bridge)	32.79038	-117.10314
	ABF - Zion/Riverdale	10.2	62	Z - Terminus of Zion Ave at Riverdale St.	32.79304	-117.09984
West (MV) - Mission Valley Section: I-5 to Admiral Baker Field E (incl. sites 1-7) [LMV,MMV,UMV]						
MG - Mission Gorge Reach: ABF-E extending 3.5 miles upstream to Old Mission Dam (incl. sites 8-10)						
8	Mission Trails @ Jackson D	13.82	159	SDCWA d/s of Suycott Crossing	32.82124	-117.06205
9T	Jackson/Birchcreek OF	13.86	198	San Marcos stormdrain by River Xing trail	32.82268	-117.06224
10	Old Mission Dam W/E	15.65	265	Downstream side of Old Mission Dam	32.83977	-117.04332
Mid-Section (MG) -Mission Gorge Section: Quarry Area to Old Mission Dam (incl. sites 8-10)						
LSB - Lower Reach Santee Basin: W Hills Pkwy to Carlton Hills Bridge (incl sites 11,12T,15T)						
11	West Hills Pkwy	17.03	300	below West Hills Pkwy overpass at USGS sta.	32.83936	-117.02436
12T	Carlton Oaks Dr/Santee L	18.23	320	W Sycamore Ck/Santee Lakes @ Carlton Oaks	32.84431	-117.00635
15T	Forester Creek at Mission Gorge Rd (Rt 52/Prospect)	18.86	334	Primary tributary entering SDR just u/s of Site 11 past W.Hills Pkwy/Rt 52 at W end of CGC	32.83221	-116.98658
USB - Upper Reach Santee Basin: Carlton Hills Blvd extending 3 miles upstream to Riverford Rd (incl. sites 13W/E,14)						
13W	Mast Park West	18.35	328	below Carlton Hills Blvd. Bridge	32.4691	-116.97333
13E	Mast Park East (Wallmart Ponds) foot bridge	18.50	330	Pedestrian bridge behind (N of) Walmart and trail at terminus of River Rock Ct.	32.84696	-116.97335
14W	Cottonwood Ave/RCP (discontinued)	19.84	340	N. of Chubb Ln. d/s of old RCP plant culvert, relocated to 14E (Magnolia Blvd) in 2018	32.84434	-116.98947
14E	Magnolia Ave. bridge	19.9	342	Under Magnolia Bridge/west end of culverts	32.84424	-116.98950
East (SB) - Santee Basin Section: West Hills Parkway to Lakeside (Sites 11-15 above) [LSB+USB]						
LSDR - Lower San Diego River Watershed: SD Estuary extending 18.5 miles to Lakeside @ SR67 (Sites 1-15T above) [LMV+MMV+UMV+MG+LSB+USB]						

**Data Management:** Water quality data recorded by team volunteers are regularly managed via a three-step process.

1. *Raw (source) data* - each site, several of which have two monitoring locations (e.g. upstream/downstream of dam, riffle or crossing), date/time, measured WQ parameters, and non-quantifiable supporting observations and comments.
2. *Compiled (vetted/proofed) data* - provided on website w/date, site location, parameter value and additional observations of general interest.
3. *Processed (formatted/aggregated) data* - with statistical computations associated with LSDR sites, reaches, sections and tributaries for each WQ parameter of interest. Monthly and annual summary results presented on SDRPF website/RiverWatch Online Info. Center webpage.

**Statistical Computations:** Basic statistical values calculated from the data include

- Mean – average of a series (sum of values divided by number of values)
- Median – middle value of an ordered series (50% larger - 50% smaller)
- Minimum – lowest or smallest value measured
- Maximum – highest or greatest value measured
- Range – Difference between maximum and minimum values
- 1<sup>st</sup> Quartile (Q1) – 25% of values smaller - 75% larger
- 2<sup>nd</sup> Quartile (Q2) – 50% of values larger - 50% smaller (same as median value)
- 3<sup>rd</sup> Quartile (Q3) – 75% of values smaller - 25% larger
- Variance – sum of the squares of deviation from the mean or average value
- Standard Deviation (SD) – square root of the Variance
- Skew – third moment about the Mean divided by the Standard Deviation
- Coefficient of Variance (CoV)– Variance divided by the Mean
- Trendlines - Moving/running average values computed over 12-month range.

**Riverwatch WQM Program Reporting:** Monthly and annual reports regarding the quantifiable water quality data monitored and resultant metrics for the lower San Diego River watershed are prepared on a regular basis and posted to the SDRPF website (see <https://www.sandiegoriver.org> (click on <Our Work/Conserve/Healthy River, Healthy Communities/RiverWatch/Online Information Center>). Additionally the field data are compiled to a master database for both record-keeping purposes and sharing with other interested parties.

## Appendix B

### Lower San Diego River Hydrology and Water Quality

*Streamflow or river discharge, is the volume of water moving past a designated location over a fixed period of time. It constitutes one of the primary drivers of changes in water quality. Often expressed as cubic feet per second (cfs) or million gallons per day (mgd), flow is the amount of water moving off a watershed or catchment area into the watercourse, as affected by weather (e.g., increasing during after rainstorms and decreasing during dry spells) and continually changing throughout each season. River flow rapidly decreases during summer months when rainfall is minimal, evaporation rates high and riparian vegetation extracts water from adjacent lands. August and September, the last two months of summer (and the water year), are commonly, but not always, months of lowest flow. A function of both volume and velocity, streamflow has a major impact on living organisms, riparian habitat, benthic conditions and overall river water quality. Velocity of flow, typically increasing as volume increases, determines the kinds and types of organisms that live in an aquatic system and also affects the amount of silt and sediment transported. Fast moving water typically contains much higher DO concentration levels than sluggish flows, as its better aerated, whereas eutrophication most often occurs in reaches with very low velocity.*

LSDR average daily flow (ADF) values as recorded at two USGS gauging stations in the lower watershed are expressed for the 21-yr monitoring period (Oct 2004 - Sept 2025) and over the past 6 decades (1965-2025) of record in **Tables B.1** through **B.3**. WY25 ADF values by season and associated norms are presented in **Table B.1**. Long-term annual rainfall totals and average annual streamflow are expressed in **Table B.2** whereas **Table B.3** provides annual rainfall and streamflow over the past two decades. Recent streamflow norms (21-yr) are roughly 20% less than long-term (60-yr) values for Mission Valley and 26% less in the Santee Basin. Average LSDR streamflow for WY25 is 49% under the current norm of 21 cfs and 64% below the long-term average of 30 cfs.

In terms of total annual rainfall (TARF), as shown in **Table B.3**, Two WY's (05 & 23) constituted "Very Wet" (TARF > 15") hydrologic years. Conversely, there have been three (07, 08, and 21) that were all "Very Dry" (TARF <5") water years. WY25 total rainfall of 5.07 inches (130 mm) is 47% below the 21-yr norm of 9.54 inches (242 mm) constituting the eight "Dry year" experienced since 2005. As listed in **Table B.2**, "Dry" and "Very Dry" years occur about one-third of the time over the past century, approximately as often as years of above normal rainfall. The remaining third are 'near normal' rainfall years with precipitation totals between eight and 12 inches annually.

Monthly discharge data (min, max and average daily flow) for the two USGS gauging stations extending from Oct. 2004 through Sept. 2025 are plotted on **Chart B.1**. Average daily flow (ADF) for the Lower San Diego River varies from less than 0.2 cfs (0.1 mgd) during the summer (dry) months to nearly 220 cfs (142 mgd) during several winter (wet) periods in the East (Santee Basin) and up to 390 cfs (252 mgd) in the West (Mission Valley) section. Running average ADF values, trending downward in WY12-WY14 began a slight increase in WY15, tempered by slight declines in WY18 and again in WY21&22. WY23&WY24 streamflow increased significantly to where running average values were considerably above norms. WY25 witnessed well below normal rainfall and runoff/streamflow.

**Table B.1 - Lower SDR Average Daily Streamflow (WY25/WY24 and 21-yr Norms)**

Location Season	West - Mission Valley		East - Santee Basin		LSDR (a)	
	WY25/24	21yr	WY25/24	21yr	WY25/24	21yr
Fall (Oct-Nov) ADF, cfs	27.1	7.4	18.4	4.2	22.0	5.0
Winter (Dec-Mar) ADF, cfs	33.3	68.7	17.0	39.2	21.5	47.1
Spring (April-May) ADF, cfs	31.1	28.0	22.1	17.4	25.9	19.8
Summer (June-Sept) ADF, cfs	19.7	3.9	9.6	2.3	12.8	2.6
Annual ADF (b), cfs	16.5/47.5	30.1	8.0/29.3	17.6	10.7/33.5	20.7
(Annual ADF, mgd)	-/26.4	(17.4)	-/16.6	(9.8)	-/20.7	(12.9)
Wet Season (Nov-April)	37.9/100.6	68.7	13.8/53.3	31.4	18.7/61.1	37.6
Dry Season (May-Oct)	3.8/6.0	5.3	2.1/3.2	3.3	2.6/4.0	3.7
River Discharge, KAFY (c)	11.9/34.4	21.8	5.8/21.2	12.8	7.7/24.3	15.0

a) Lower San Diego River average daily flow represents mean hydrologic conditions based on averaging the two USGS gauging station streamflow values.

(b) ADF values are expressed in cubic feet per second (cfs) and million gallons per day (mgd); 1 cfs = 0.583 mgd.

(c) Total average annual discharge expressed in acre-feet (1 mgd = 1120 AFY).

**Table B.2 - Total Annual Rainfall (1914-2025) and Average Daily Streamflow**

Type	# of Years	Percent of Total Years	Total Annual Rainfall (a)			Average Daily Streamflow, cfs			
			inches	mm	Avg.,	East (b)	West (c)	LSDR	
Very Wet	3	3%	32%	>20"	>500	580/23"	68	113	92
Wet	11	10%		15-20	380-499	430/17"	48	81	66
Above Norm	22	20%		12-15	300-379	340/13"	26	44	35
Normal	40	36%	36%	8-12	200-299	250/10"	10	18	15
Dry	28	25%	32%	5-8	125-199	160/6"	7	12	10
Very Dry	8	7%		<5"	<125	100/4"	5	9	7
Total/ AAvg	112	100%			254	9.98"	14	23	17

a) Total annual rainfall accumulated from 1 October through September 31 of a water year.

b) Santee Basin USGS Stream Gauge Station 11022480 below West Hills Pkwy Bridge near Mast Blvd. in Santee.

c) Mission Valley USGS Stream Gauge Station 11023000 at Fashion Valley Mall; incomplete data prior to 1968.

Monthly and seasonal average daily flow (lines) and annual rainfall (bars/columns) over the monitoring period for both stations are shown in **Chart B.2**. As wet season flows are several hundred times greater than dry-season summer-time flows, the flow values are expressed on log scale, whereas the rainfall scale is arithmetic. Seasonal flow patterns express range, variance and a strong positive correlation between log ADF values and monthly rainfall over the past 21 years of record. w (lines) and total annual rainfall (columns) are also expressed in **Chart B.3** on a water-year basis. Highest flows during the monitoring period at both gauging stations were recorded in WY05 (very wet year); while the lowest were in WY14 (very dry year) following three years of well below normal rainfall. The multiple years of well below normal rainfall also

**Table B.3 - Annual Rainfall and Average Daily Flow (WY05-WY25)**

(Type of Year)	Annual Rainfall		Variance (a)	ADF, cfs (mgd)			Variance (d)
	mm	inches		East (b)	West (c)	LSDR	
WY05 (Very Wet)	574	22.60	137%	50.9 (33)	100 (65)	71.5 (46)	207%
WY06 (Dry)	152	6.00	-37%	10.7 (7)	17.5 (11)	13.6 (9)	-42%
WY07 (Very Dry)	98	3.85	-60%	7.2 (5)	12.8 (8)	9.5 (6)	-59%
WY08 (Dry)	183	7.20	-24%	13.3 (9)	25.0 (16)	18.2 (12)	-22%
WY09 (below normal)	232	9.15	-4%	15.0 (10)	27.2 (18)	20.1 (13)	-14%
WY10 (above normal)	282	10.6	11%	25.1 (16)	42.5 (27)	32.4 (21)	39%
WY11 (above normal)	323	12.70	33%	43.3 (28)	61.9 (40)	46.9 (30)	102%
WY12 (Dry)	201	7.90	-17%	11.9 (8)	19.1 (12)	14.9 (10)	-36%
WY13 (Dry)	165	6.56	-31%	8.1 (5)	10.6 (7)	9.1 (6)	-61%
WY14 (Dry)	129	5.09	-47%	4.3 (3)	6.1 (4)	5.1 (3)	-78%
WY15 (above normal)	302	11.91	25%	7.1 (5)	15.2 (10)	10.5 (7)	-55%
WY16 (Dry)	208	8.20	-14%	12.2 ( 8)	20.4 ( 16)	15.6 (10 )	-33%
WY17 (above normal)	323	12.73	31%	27.7 (18)	57.3 (37)	40.0 (26)	72%
WY18 (Very Dry)	85	3.34	-66%	5.5 (4)	7.2 (5)	5.9 (4)	-75%
WY19 (above normal)	326	12.83	34%	20.1 (13)	35.5 (24)	27.0 (17)	13%
WY20 (above normal)	342	13.48	43%	22.3 (14)	48.6(31)	33.1 (21)	46%
WY21 (Very Dry)	122	4.79	-50%	7.2 (5)	11.6 (9)	9.0 (6)	-62%
WY22 (Dry)	171	6.75	-29%	6.9 (5)	15.3(10)	10.3 (7)	-55%
WY23 (Very Wet)	400	15.76	66%	44.3 (27)	68.1 (39)	49.1 (32)	137%
WY24 (above normal)	316	12.43	31%	29.5 (16)	47.5 (26)	33.5 (20)	62%
<b>WY25 (Dry)</b>	<b>129</b>	<b>5.07</b>	<b>-47%</b>	<b>8.0 (5)</b>	<b>16.5 (11)</b>	<b>10.7 (7)</b>	<b>-49%</b>
21-yr Norm (05-25)	241	9.50	0%	17.6 (12)	30.1 (20)	21.2 (14)	0%
50-yr AAD	257	10.1	5%	20.9 (14)	35.5 (24)	29.7 (18)	22%




a) Percent difference from 21-yr average total annual rainfall (9.54 in/yr); black-above, red-below average.

b) Santee Basin USGS Stream Gauge Station 00067556 near Mast Rd., Santee (West Hills Pkwy.)

c) USGS Stream Gauge Station 00459999 at Fashion Valley Mall; incomplete data prior to 1965.

d) Percent difference from 21-yr LSDR average daily streamflow..

experienced well below normal streamflows while those years of greatest rainfall were all well above normal in terms of streamflow. WYs23&24 experienced well above normal rainfall and streamflows, whereas WY25 was considerably below normal in terms of both rainfall and flow. All three charts show the strong correlations in variance between rainfall and runoff on a monthly and annual

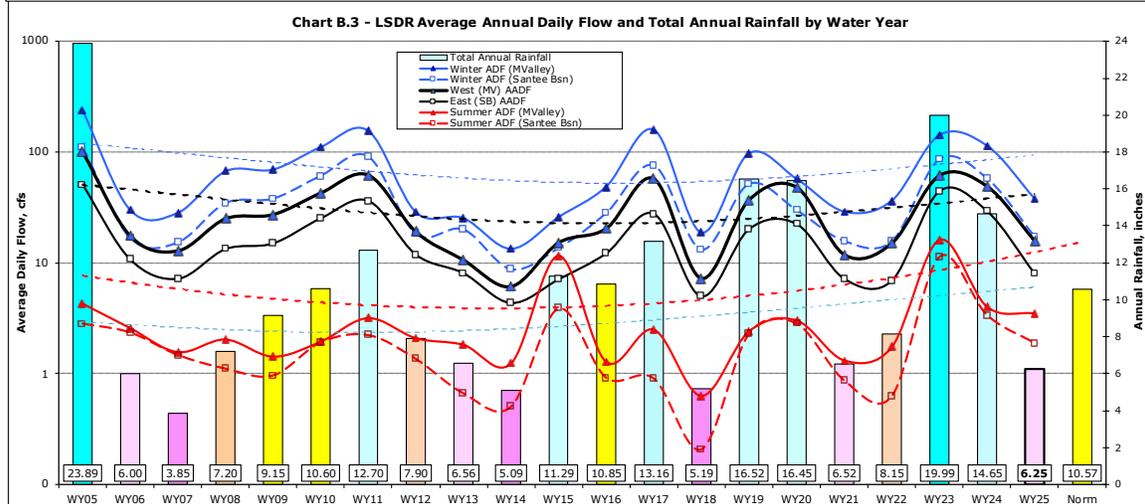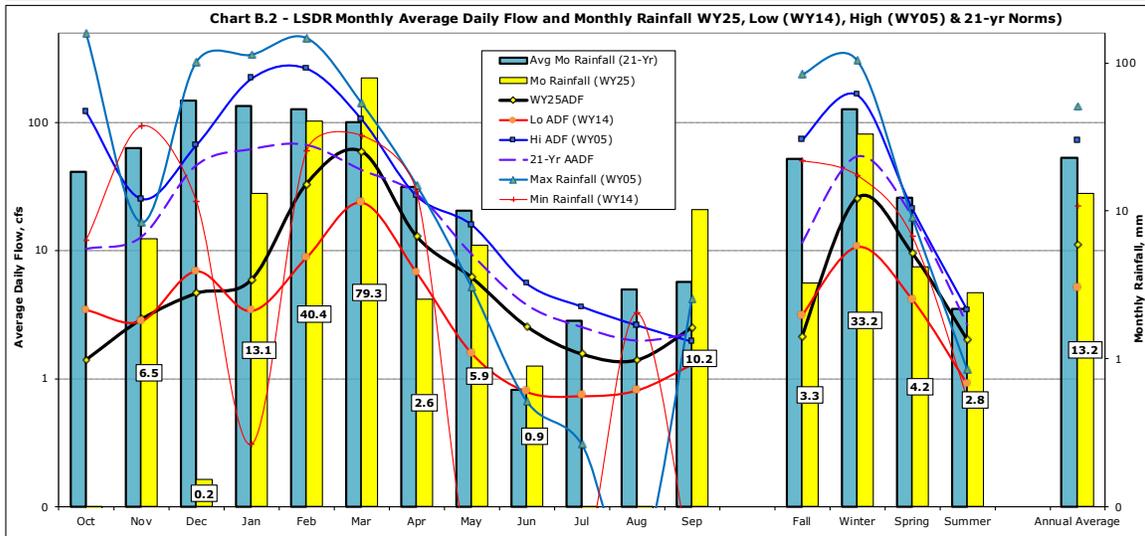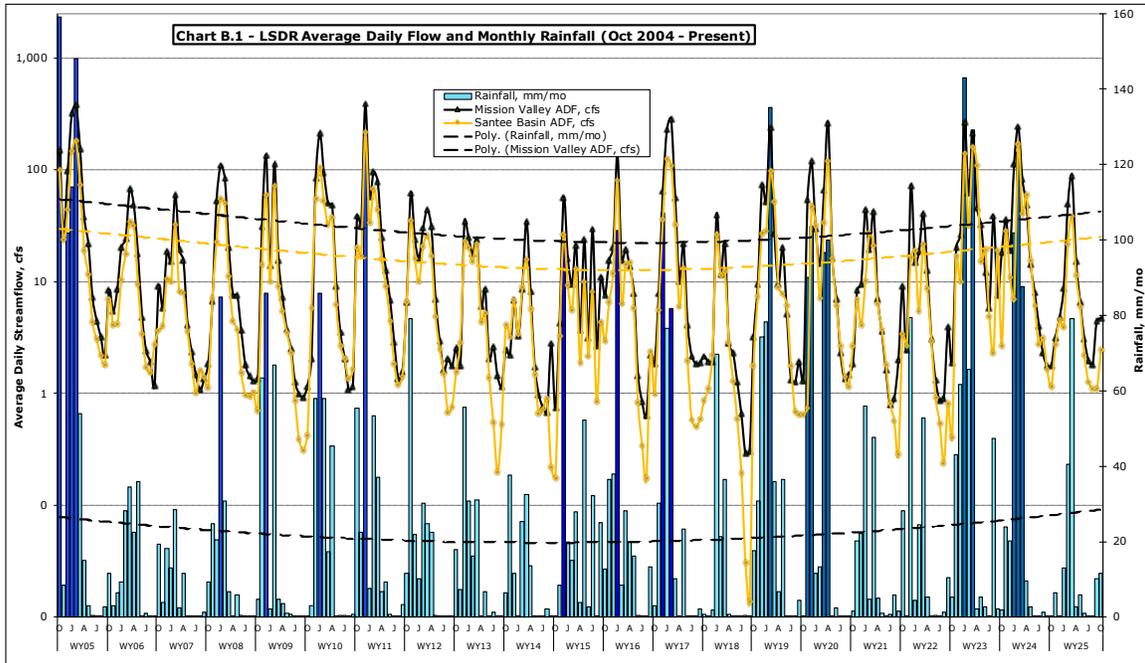

## Appendix C

### Monthly WQM Site Data for WY24 and WY25

Appendix C contains 12 tables incorporating last and this year’s (WY24/WY25) RiverWatch water quality monitoring data by month (down) and site (across). **Tables C.1(W&E)** list water temperature in degrees Celsius, **C.2(W&E)** - Specific Conductance in mS/cm, **C.3(W&E)** - pH, **C.4(W&E)** - Dissolved Oxygen concentrations in mg/L, **C.5(W&E)** - DO as Percent of Saturation and **C.6-Nutrient** (NO<sub>3</sub> & PO<sub>4</sub>) concentrations at selected west and eastern sites. All of these values are incorporated into SDRPF’s water quality data base.

**Table C.1(W) West Section Water Temperatures WY24/WY25 Data**

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley			Mid Mission Valley		Upper Mission Valley	
Oct	21.1/20.5	22.6/21.1	22.4/21.0	22.8/21.5	20.1/18.7	21.2/20.4	21.4/19.3
Nov	16.3/16.6	14.7/14.8	14.5/15.4	14.0/15.8	14.0/13.0	13.6/14.6	13.5/14.2
Dec	13.4/13.3	13.3/13.7	13.3/13.6	13.0/13.0	12.1/11.7	12.9/12.4	12.5/12.4
Jan	11.7/9.4	11.6/10.7	11.3/10.8	11.4/10.5	10.3/9.5	10.9/10.2	10.5/10.1
Feb	17.3/15.8	14.1/16.0	14.2/15.4	13.8/15.3	14.8/14.0	14.0/14.6	14.7/14.4
Mar	18.1/16.5	18.0/16.2	17.9/16.1	17.5/15.8	17.3/14.9	17.1/15.5	16.6/15.3
Apr	19.4/20.6	19.3/20.0	19.2/19.8	19.3/19.5	18.3/18.5	18.5/18.9	18.3/19.0
May	20.6/23.2	20.5/21.9	21.9/21.4	20.5/22.5	19.8/19.7	20.5/20.8	20.5/20.5
Jun	22.2/24.6	22.2/24.2	22.2/24.2	22.3/25.3	21.5/21.7	22.3/23.9	22.3/22.3
Jul	24.4/24.2	25.2/23.8	25.3/23.8	26.2/25.2	23.4/20.4	25.3/23.1	24.0/22.5
Aug	25.7/23.5	26.0/23.9	25.4/23.3	26.2/25.3	23.0/20.8	25.2/23.7	23.8/23.0
Sept	24.5/25.4	25.0/24.1	25.3/24.8	26.7/25.1	21.4/22.5	24.4/23.0	22.7/22.9
<b>AAvg</b>	<b>19.5/19.5</b>	<b>19.4/19.2</b>	<b>19.4/19.1</b>	<b>19.5/19.6</b>	<b>18.0/17.1</b>	<b>18.8/18.4</b>	<b>18.4/18.0</b>
Norm	(19.65)	(18.98)	(19.15)	(19.54)	(17.21) <sup>d</sup>	(18.28)	(18.10)

- a) Annual average water year values and 21-yr norms, expressed in degrees Celcius, are based on unweighted averaging of monthly data (Oct-Sept); values below norms are in blue; values above in red.
- b) Mast Rd Bridge (Site 5) monthly water temperatures are typically several degrees below other west section readings due to groundwater exfiltration (springs) situated immediatly upstream.

**Table C.1(M/E) Middle and East Section Water Temperature WY24/WY25 Data**

Site	8	9T	10	11	15T	12T	13W	13E	14
Reach	Mission Gorge			Lower Santee Basin			Upper Santee Basin		
Oct	18.7/18.6	15.7/20.6	18.6/18.4	18.7/18.4	19.4/18.7	21.5/—	17.2/17.9	19.1/18.7	22.0/21.5
Nov	14.4/12.8	14.8/8.3	14.3/12.2	14.2/14.3	17.0/13.1	15.0/14.6	14.3/13.1	16.6/13.1	14.7/16.2
Dec	9.6/10.2	8.0/8.5	9.5/9.3	10.5/11.0	10.6/10.8	11.4/12.1	9.8/9.8	12.0/11.1	12.8/13.1
Jan	8.9/7.7	7.3/13.0	9.0/6.9	9.6/9.1	11.5/7.7	10.6/8.9	5.2/8.4	11.0/9.4	11.7/11.2
Feb	12.9/13.4	13.4/8.6	12.8/14.4	12.8/14.0	13.0/14.9	12.8/15.4	12.9/13.3	14.5/14.7	13.4/15.6
Mar	15.7/13.7	13.2/13.8	15.9/14.3	15.3/13.9	17.2/16.2	16.4/15.8	14.6/13.4	17.8/15.1	15.4/15.9
Apr	17.5/16.2	18.4/13.5	17.9/16.1	17.4/16.0	17.2/16.6	18.6/17.7	17.4/16.1	17.5/16.9	17.0/19.1
May	19.1/18.9	16.6/16.2	19.0/18.6	18.4/18.0	20.0/18.9	17.4/—	18.5/17.3	19.6/19.2	21.7/21.8
Jun	21.3/21.9	18.4/18.2	22.2/22.4	19.9/20.8	22.7/21.9	18.3/—	20.0/19.7	21.9/22.8	24.9/25.5
Jul	22.9/21.4	19.8/17.9	23.3/22.3	22.3/20.7	23.6/22.0	-/—	21.3/20.1	23.0/22.6	26.5/25.4
Aug	23.6/22.0	20.9/20.5	23.8/22.7	23.1/20.6	24.0/21.5	-/—	22.4/20.2	23.7/22.8	27.2/25.9
Sep	22.3/23.0	19.3/19.1	21.9/22.1	21.1/22.4	21.9/24.3	-/—	21.0/20.5	22.6/22.9	26.0/25.7
AAvg	17.2/16.7	15.5/14.7	17.4/16.6	16.9/16.6	18.2/17.2	15.8/14.1	16.2/15.8	18.3/17.4	19.4/19.7
Norm	(17.07)	(15.58) <sup>e</sup>	(17.49)	(16.67)	(17.78)	(17.35)	(15.79)	(18.15)	(17.96)

*www)Forester Creek (15T) discharges within the Lower Santee Basin is below Carlton Hills Golfcourse just upstream of SR52.*

*xxxx)Birchcreek Outfall (Site 9T) water temperture values are typically lower than found at other sites as the source is local groundwater seeps draining from a small upstream catchment.*

**Table C.2(W) West Section WY24/WY25 Specific Conductance Data**

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	7.56/28.0	2.92/3.45	2.77/3.31	2.63/3.27	2.74/3.43	2.54/3.50	2.59/2.71
Nov <sup>c</sup>	1.45/23.3	1.28/3.49	1.25/3.40	1.21/3.29	1.07/3.61	1.03/3.58	0.99/3.01
Dec	19.5/34.2	2.01/3.51	1.99/3.40	2.00/3.24	1.89/3.13	1.77/2.96	1.77/2.66
Jan	10.9/30.3	1.86/3.49	1.77/3.26	1.85/3.11	1.63/3.02	1.54/2.84	1.51/2.63
Feb	5.53/1.43	1.10/1.33	1.07/1.36	1.09/1.46	0.99/1.59	1.00/1.49	1.04/1.71
Mar	1.80/1.28	1.62/1.24	1.54/1.23	1.50/1.31	1.35/1.33	1.35/1.28	1.40/1.37
Apr	1.60/2.96	1.58/2.46	1.49/2.38	1.51/2.32	1.40/2.26	1.39/2.04	1.37/2.03
May	2.20/5.57	2.08/2.75	2.03/2.64	1.97/2.57	1.87/2.61	1.76/2.38	1.74/2.34
Jun	3.34/6.54	2.42/3.04	2.32/2.87	2.26/2.93	2.18/3.00	2.05/2.67	2.01/2.52
Jul	5.72/11.9	2.83/3.44	2.71/3.25	2.66/3.30	2.58/3.50	2.43/3.05	2.34/2.66
Aug	9.97/15.4	3.32/3.78	3.16/2.81	3.04/3.29	3.05/3.60	2.94/3.29	2.64/2.63
Sep	6.06/9.16	3.41/3.52	3.33/3.81	3.31/3.13	3.26/1.55	3.25/2.57	3.63/1.78
<b>AAvg</b>	<b>6.30/14.3</b>	<b>2.20/2.96</b>	<b>2.12/2.81</b>	<b>2.09/2.77</b>	<b>2.00/2.72</b>	<b>1.92/2.64</b>	<b>1.92/2.34</b>
Norm	9.498	2.650	2.534	2.448	2.578	2.556	2.409

a) All values expressed in milli-Siemens/cm; SpC values >4.0 mS/cm are shown in blue, values < 2.0 mS/cm are in green.

b) Average annual SpC values are less than 21-yr norms at all west section sites (1-7).

**Table C.2(M-E) Middle and East Section WY24/WY25 Specific Conductance Data**

Site	8	9T	10	11	12T	15T	13W	13E	14
Reach	Mission Gorge			Lower Santee Basin		LSB <sup>c</sup>	LSB	Upper Santee Basin	
Oct	2.20/2.42	2.83/4.81	2.20/2.38	2.08/2.30	1.71/—	2.20/2.45	0.83/1.70	1.09/1.92	0.83/1.70
Nov	0.87/2.31	2.31/4.89	0.87/2.31	0.86/2.38	1.78/1.97	1.56/2.71	0.55/1.75	0.74/1.93	0.55/1.75
Dec	1.64/2.25	4.40/4.61	1.64/2.23	1.62/2.19	1.73/2.00	2.61/2.23	0.91/1.79	1.10/1.89	0.91/1.78
Jan	1.13/2.28	3.46/4.72	1.52/2.29	1.38/2.25	1.47/2.03	0.97/2.71	1.09/1.87	1.16/2.01	1.09/1.87
Feb	0.98/1.89	2.30/4.25	1.01/1.85	1.03/1.85	0.58/1.73	2.50/2.38	0.73/1.33	0.86/1.53	0.73/1.33
Mar	1.26 /1.53	3.63/3.78	1.30/1.41	1.36/1.56	0.73/1.53	2.45/2.52	0.73/0.90	1.19/1.15	0.73/0.90
Apr	1.28/1.85	3.67/4.27	1.31/1.85	1.38/1.98	0.76/1.38	1.61/1.71	1.13/1.26	1.15/1.43	1.13/1.26
May	1.56/1.99	3.90/4.36	1.59/2.06	1.65/2.04	0.56/—	2.55/2.57	1.34/1.50	1.43/1.64	1.34/1.50
Jun	1.79/2.16	3.90/4.50	1.81/2.19	1.83/2.21	0.58/—	2.56/2.87	1.45/1.60	1.56/1.76	1.45/1.60
Jul	2.00/2.38	4.28/4.74	1.32/2.42	2.08/2.44	dry	2.66/ /2.97	1.49/1.68	1.71/1.95	1.49/1.68
Aug	1.44/2.38	4.71/3.85	1.82/2.50	2.27/2.45	dry	2.80/2.81	1.66/1.68	1.86/1.98	1.66/1.68
Sep	2.37/3.00	4.72/2.99	2.40/2.68	2.34/1.73	dry	2.86/1.44	1.67/1.78	1.91/2.09	1.67/1.78
<b>AAvg</b>	<b>1.54/2.20</b>	<b>3.68/4.46</b>	<b>1.56/2.18</b>	<b>1.66/2.11</b>	<b>1.10/1.77</b>	<b>2.25/2.45</b>	<b>1.13/1.57</b>	<b>1.31/1.77</b>	<b>1.13/1.57</b>
<i>Norm</i>	<i>2.258</i>	<i>4.605</i>	<i>2.200</i>	<i>2.193</i>	<i>1.591</i>	<i>2.635</i>	<i>1.572</i>	<i>1.857</i>	<i>1.496</i>

- a) All values expressed in milli-Siemens/cm; values < 2.0 mS/cm are in green; > 4.0 mS/cm are in blue.
- b) WY24/WY23 annual averages and 20-yr norms (in italics) are based on averaging of monthly data (Oct-Sept).
- c) Forester Creek discharges within the Lower Santee Basin enter just upstream from W Hills Pkwy Bridge.
- d) Average annual WY25 SpC values are greater than last year's (WY24) values at all Mid and East sites (8-15T).

**Table C.3(W) West Section WY24/WY25 pH Data**

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	7.62/7.48	8.00/7.48	7.44/7.69	7.99/7.81	7.56/7.68	7.46/7.58	7.69/7.44
Nov	7.67/7.61	7.62/7.69	7.67/7.82	7.61/7.75	7.65/7.73	7.60/7.61	7.74/7.59
Dec	7.49/7.49	7.40/7.89	7.31/7.86	7.40/7.85	7.31/7.71	7.22/7.65	7.63/7.77
Jan	7.85/7.58	7.94/7.84	8.03/7.88	7.85/7.90	7.94/7.85	7.76/7.73	7.77/7.90
Feb	7.81/7.43	7.66/7.40	7.79/7.47	7.72/7.49	7.87/7.50	7.73/7.56	7.83/7.78
Mar	7.90/7.61	7.89/7.54	7.93/7.56	7.80/7.59	7.89/7.65	7.78/7.62	7.91/7.76
Apr	7.81/7.74	7.79/7.64	7.93/7.59	8.10/7.68	8.00/7.16	8.12/7.55	8.32/7.63
May	7.75/7.87	7.75/7.61	7.72/7.66	7.70/7.82	7.70/7.60	7.64/7.51	7.81/7.58
Jun	7.86/7.92	7.88/7.61	7.80/7.79	7.87/7.96	7.78/7.62	7.73/7.50	7.86/7.40
Jul	7.85/7.95	7.67/7.56	7.71/7.71	7.84/7.98	7.65/7.48	7.54/7.51	7.62/7.15
Aug	8.02/7.85	7.67/7.56	7.95/7.60	7.93/7.87	7.80/7.55	7.63/7.49	7.47/7.24
Sep	7.98/7.76	7.64/7.73	7.73/7.84	7.90/7.64	7.59/7.44	7.59/7.31	7.20/7.12
<b>AAvg</b>	<b>7.80/7.69</b>	<b>7.74/7.63</b>	<b>7.75/7.71</b>	<b>7.81/7.78</b>	<b>7.73/7.58</b>	<b>7.65/7.55</b>	<b>7.74/7.53</b>
<i>Norm</i>	(7.75)	(7.68)	(7.75)	(7.78)	(7.63)	(7.61)	(7.58)

- a) All pH values are unit-less; values of 8.0 or greater are listed in red and 7.5 or below are in green.  
 b) WY24 and WY25 pH values and 21-yr norms are based on averaging of all monthly data (Oct-Sept).

**Table C.3(M-E) Middle and East Section WY24/WY25 pH Data**

Site	8	9T	10	11	12T	13E	14	15T	13W
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB <sup>c</sup>	LSB
Oct	8.00/ 7.97	8.37/8.18	7.90/7.75	7.56/7.78	7.73/-	7.13/7.36	7.76/7.82	7.79/7.74	7.42/ 7.49
Nov	8.01/ 8.08	8.29/8.23	7.74/7.83	7.62/7.69	7.57/7.45	7.49/7.35	7.67/7.80	7.66/8.07	7.41/ 7.51
Dec	8.01/ 8.20	8.21/8.34	7.58/7.82	7.67/7.71	7.40/8.15	7.85/7.67	7.58/8.02	7.53/7.86	7.40/ 7.58
Jan	8.21/ 8.16	8.30/8.32	7.76/7.85	7.67/7.72	8.03/7.90	7.30/7.77	7.49/7.85	7.76/8.05	7.94/ 7.56
Feb	8.21/ 8.12	8.55/8.29	7.66/7.85	7.69/7.64	7.99/8.41	7.71/7.61	7.59/8.20	8.27/8.31	7.57/ 7.43
Mar	8.31/ 8.11	8.30/8.29	7.70/7.69	7.74/7.55	7.77/8.04	7.33/7.63	8.67/7.96	8.13/8.22	7.60/ 7.25
Apr	8.44/ 8.08	8.35/8.17	7.71/7.72	7.73/7.68	7.76/7.77	7.40/7.50	7.10/7.65	8.32/8.20	7.48/ 7.32
May	8.26/ 8.04	8.21/8.21	7.77/7.58	7.78/7.61	7.63/-	7.34/7.34	7.87/7.76	8.03/8.04	7.59/ 7.35
Jun	8.30/ 7.93	8.26/8.17	8.02/8.02	7.84/7.76	7.68/-	7.39/7.55	8.11/8.10	8.14/8.09	7.62/ 7.41
Jul	8.08/ 7.36	8.20/8.09	7.78/7.66	7.76/7.64	dry	7.38/7.40	8.07/7.89	7.97/7.76	7.54/ 7.55
Aug	7.94/ 7.33	8.21/8.20	7.92/7.58	7.77/7.65	dry	7.32/7.34	7.93/7.91	7.74/7.82	7.57/ 7.54
Sep	7.59/ 7.29	8.10/8.28	7.61/7.57	7.68/7.43	dry	7.35/7.54	8.00/7.91	7.78/7.98	7.68/ 7.44
<b>AAvg</b>	<b>8.11/7.89</b>	<b>8.27/8.23</b>	<b>7.76/7.74</b>	<b>7.71/7.66</b>	<b>7.73/7.95</b>	<b>7.42/7.51</b>	<b>7.82/7.91</b>	<b>7.93/7.83</b>	<b>7.57/7.45</b>
Norm	7.72	7.94	7.81	7.59	7.92	7.64	7.84	8.02	7.58

- a) All pH values are unit-less; monthly values of 8.0 or above are in red, while those at 7.5 or below are in green.
- b) WY25/WY24 and 21-yr pH norms are based on averaging monthly results (Oct-Sept).
- c) Forester Creek discharges within the Lower Santee Basin section of the river upstream of Site 11 east of W Hills Pkwy. Bridge.

**Table C.4(W) West Section WY24/WY25 Dissolved Oxygen Concentration Data**

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	4.90/3.47	5.07/3.42	4.54//2.98	6.39/4.36	4.06/5.42	1.27/0.32	4.36/1.20
Nov	4.54/5.98	6.48/6.67	6.07/6.08	6.72/7.32	6.62/6.38	6.37/3.71	7.44/3.55
Dec	4.90/6.40	6.37/8.30	7.55/7.55	6.22/9.64	7.61/6.93	6.34/6.18	6.42/6.92
Jan	6.84/7.51	8.17/9.05	7.36/7.94	7.53/9.12	7.45/8.10	6.71/7.63	9.68/7.79
Feb	6.44/6.26	7.94/5.94	7.73/5.60	7.88/6.48	7.80/6.38	8.37/5.50	8.46/8.18
Mar	6.50/7.50	6.72/7.23	6.56/7.09	6.91/7.50	6.79/7.52	6.17/7.37	7.64/8.38
Apr	7.40/8.17	6.98/6.82	7.09/3.89	7.77/6.80	6.77/5.25	7.28/4.27	7.36/5.18
May	7.27/10.53	5.35/5.38	4.34/3.57	5.34/6.71	4.16/4.75	3.22/3.09	5.74/4.17
Jun	5.47/9.14	6.53/4.40	4.17/3.16	5.74/6.24	4.92/4.05	4.56/1.02	5.57/2.92
Jul	6.79/9.56	5.84/3.78	3.61/2.32	4.49/5.50	4.20/4.10	1.02/0.44	3.17/2.20
Aug	7.88/7.47	5.29/3.40	3.15/2.84	4.19/3.41	3.57/4.00	0.37/1.18	2.41/1.81
Sep	9.33/5.60	3.40/5.78	0.85/3.18	3.71/3.69	3.60/3.58	0.37/0.44	1.80/3.60
<b>AAvg</b>	<b>6.52/7.30</b>	<b>6.18/5.85</b>	<b>5.25/4.68</b>	<b>6.07/6.40</b>	<b>5.63/5.54</b>	<b>4.33/3.43</b>	<b>5.84/4.66</b>
<i>Norm</i>	(6.17)	(4.60)	(4.57)	(5.99)	(4.88)	(3.52)	(5.14)

d) a) All values expressed in milligrams/liter.

e) b) DO levels of 7.0 mg/L or greater are shown in blue; below 5 mg/L in red.

**Table C.4(E) Mid and East Section WY24/25 DO Concentration Data**

Site	8	9T	10	11	12T	13E	14	15T	13W
Reach	Mission Gorge			Lower Santee Basin		Upper Santee Basin		LSB <sup>c</sup>	LSB
Oct	5.51/1.05	8.20/5.48	4.25/0.66	4.48/0.66	4.74/2.88	1.33/0.37	3.79/1.59	4.23/4.07	2.32/1.93
Nov	8.64/10.4	8.74/11.9	6.07/9.14	6.73/9.14	6.44/6.99	6.16/1.21	6.41/2.14	3.93/6.92	5.60/4.36
Dec	9.10/9.77	11.5/10.3	7.99/7.86	7.39/7.86	5.65/6.49	3.01/2.08	6.14/4.53	8.50/7.29	3.50/5.59
Jan	11.4/11.7	13.7/11.1	8.36/7.36	9.26/7.36	9.32/8.06	3.63/3.56	4.71/5.96	7.99/9.46	8.61/4.22
Feb	8.97/13.3	8.58/13.9	7.77/10.3	8.89/10.3	8.70/9.37	8.24/3.56	6.42/8.01	8.43/12.2	7.70/6.54
Mar	9.03/9.95	10.7/10.3	7.47/8.06	7.02/8.06	6.73/9.61	1.54/3.8	11.3/5.9	7.48/9.18	6.57/3.82
Apr	8.74/10.3	8.40/11.4	5.95/6.71	5.90/6.70	5.96/6.56	2.45/2.14	5.78/7.55	7.12/9.15	5.12/1.93
May	7.77/6.83	10.3/8.48	5.89/5.06	6.35/5.06	6.10/9.63	1.01/1.55	3.86/6.21	6.07/4.90	4.87/2.57
Jun	7.09/8.22	9.61/7.86	6.44/7.32	6.20/7.32	6.42/6.62	0.76/2.11	5.84/4.11	7.08/7.61	3.11/2.04
Jul	6.96/6.21	7.67/9.33	5.48/5.31	5.82/5.31	dry	1.03/.04	4.13/1.95	5.88/5.30	2.37/1.94
Aug	6.88/3.47	8.94/5.88	6.33/3.53	5.53/3.53	dry	1.01/0.44	2.87/1.17	6.10/4.63	1.65/dry
Sep	4.18/5.54	9.27/8.55	2.43/4.81	5.13/4.81	dry	1.09/1.15	3.47/2.37	5.84/4.73	1.25/2.26
<b>WY24/25</b>	<b>7.86/8.06</b>	<b>9.62/9.55</b>	<b>6.20/6.34</b>	<b>6.56/6.41</b>	<b>6.67/7.36</b>	<b>2.61/1.92</b>	<b>5.39/4.29</b>	<b>6.55/7.12</b>	<b>4.39/3.38</b>
Norm	(7.27)	(9.28)	(6.86)	(6.13)	(7.07)	(2.72)	(3.65)	(7.21)	(3.77)

a) All values expressed in milligrams/liter; values less than 5 mg/L (DO depletion threshold) are expressed in red, < 2.5 mg/L (hypoxic level) cells highlighted in yellow and <1 mg/L (exaerobic zone) in pink. DO levels of 7.0 mg/L or greater are shown in blue.

b) Tributary discharges within the Lower Santee Basin reach enter the main stream below the west end of Carlton Oaks Golf Course and just upstream of SR 67.

**Table C.5(W) West Section WY24/WY25 DO Percent Saturation Data**

Site #	1	2	3	4	5	6	7
Reach	Lower Mission Valley				Upper Mission Valley		
Oct	55/ <b>38</b>	61/ <b>39</b>	<b>53/34</b>	<b>75/50</b>	<b>45/59</b>	<b>14/4</b>	<b>50/13</b>
Nov	<b>47/61</b>	66/67	60/62	66/75	65/61	61/ <b>37</b>	<b>72/35</b>
Dec	<b>47/60</b>	61/ <b>81</b>	<b>74/74</b>	60/92	<b>72/65</b>	61/58	61/65
Jan	63/65	<b>76/82</b>	68/72	69/83	<b>67/72</b>	61/69	<b>87/70</b>
Feb	67/64	<b>78/61</b>	<b>77/56</b>	<b>78/65</b>	<b>78/62</b>	<b>82/54</b>	<b>84/81</b>
Mar	<b>70/78</b>	<b>72/74</b>	<b>70/73</b>	<b>73/76</b>	<b>72/75</b>	64/74	<b>79/85</b>
Apr	<b>82/92</b>	<b>76/76</b>	<b>78/43</b>	<b>85/75</b>	<b>73/57</b>	<b>79/47</b>	<b>79/57</b>
May	<b>82/124</b>	60/62	<b>49/41</b>	56/78	<b>46/52</b>	<b>36/35</b>	<b>64/47</b>
Jun	63/ <b>111</b>	<b>77/53</b>	<b>49/38</b>	68/77	<b>57/47</b>	<b>54/12</b>	<b>65/34</b>
Jul	<b>78/115</b>	<b>70/45</b>	<b>44/28</b>	57/68	<b>49/46</b>	<b>12/5</b>	<b>38/26</b>
Aug	<b>97/88</b>	63/ <b>41</b>	<b>39/34</b>	52/ <b>42</b>	<b>42/45</b>	<b>5/14</b>	<b>29/21</b>
Sept	<b>113/69</b>	<b>42/70</b>	<b>11/39</b>	<b>47/45</b>	<b>41/42</b>	<b>4/5</b>	<b>21/42</b>
<b>WY24/25</b>	<b>72/80</b>	<b>67/63</b>	<b>56/49</b>	<b>66/69</b>	<b>59/57</b>	<b>44/35</b>	<b>61/48</b>
Norm	67.5	<b>48.4</b>	<b>48.1</b>	64.4	<b>49.9</b>	<b>35.9</b>	53.2

- a) All values expressed as percent of saturation; results are listed in bold red; otherwise in bold black.
- b) WYs 24/25 values < DO depletion threshold (55%) are expressed in red; DO% Sat values of 70% or greater are shown in blue..
- c) WY24/25 annual average and 21-yr norms are based on averaging of monthly data (Oct-Sept).

**Table C.5(M-E) Mid and East Section WY24/WY25 DO Percent Saturation Data**

Site	8	9T	10	11	12T	13W	13E	14	15T
Reach	Mission Gorge			Lower Santee Basin			Upper Santee Basin		LSB <sup>c</sup>
Oct	60/84	84/107	46/61	49/74	54/-	24/25	15/6	43/12	47/77
Nov	85/90	82/98	60/67	66/66	64/53	55/39	60/8	67/35	42/70
Dec	81/95	98/103	74/79	68/71	53/88	47/56	28/24	59/74	79/72
Jan	99/95	115/103	73/83	82/74	85/78	70/56	34/40	44/54	75/77
Feb	86/99	83/101	76/83	85/74	82/85	70/47	82/43	67/121	81/79
Mar	92/99	103/104	77/76	71/72	69/85	66/45	16/28	117/105	79/79
Apr	93/100	89/101	63/68	63/75	64/76	55/23	27/11	62/49	76/72
May	85/90	107/106	64/55	68/57	64/-	43/32	12/6	44/37	67/59
Jun	80/73	104/103	76/81	69/59	64/-	35/20	9/14	68/81	83/76
Jul	81/44	85/97	66/61	67/51	-	27/25	13/5	52/42	70/69
Aug	82/30	101/98	76/42	66/54	-	19/26	12/5	37/57	73/63
Sep	48/16	102/99	28/55	58/21	-	14/11	13/6	43/41	67/32
<b>WY24/25</b>	<b>81/76</b>	<b>96/102</b>	<b>65/64</b>	<b>68/62</b>	<b>67/77</b>	<b>45/34</b>	<b>27/16</b>	<b>59/59</b>	<b>70/69</b>
<i>Norm</i>	74.0	94.0	70.5	60.6	72.5	37.1	27.6	38.2	69.9

a) All values expressed as percent of saturation; values < 55% (DO depletion threshold) are expressed in red; < 25% (hypoxic level) cells highlighted in yellow and <10% (exaerobic zone) in dark yellow.. DO% Sat values of 70% or greater are shown in blue.

b) All WY24/WY25 annual averages (bold print) are based on averaging of monthly data (Oct-Sept).

c) Forester Ck (Site 15T) discharges within the Lower Santee Basin reach just u/s of Site 11.

**Table C.6 WY24/WY25 Nutrient (NO<sub>3</sub> and PO<sub>4</sub>) Data**

Site# Name	2 YMCA	7 ABF	11 WHP	13W MPW	14 MAG AV.	15T FSTR CK
Section	Mission Valley Sites		Santee Basin (Eastern Sites)			
Oct	0.1n 0.1p 0.2p	0.2n 0.2p 0.6 p	0.1n 0.5p	0.0n 0.4p 0.1n 0.3p	0.0n 0.5p	0.6n 0.3p >3.4n 1.0p
Nov	0.1n 0.2p	0.1n 0.6p		>0.3n 0.4p 0.1n 0.4p		0.8n 0.1p 2.6n 0.0p
Dec	0.0n 0.3p			0.0n 1.0p 0.1n -p	>3.4n 0.0p	1.3n 0.0p 1.3n -p
Jan	-n 0.2p	-n 0.2p		0.0n 0.5p		0.6n 0.3p
Feb	0.0n 0.2p	0.0n 0.2p		0.2n 0.4p -n 0.4p		>3.4n 0.1p
Mar	0.0n 0.1p 0.3n 0.0-p	0.3n 0.0p		0.1n 0.4p 0.0n 0.6p		>3.4n 0.2p 3.4n 0.1p
Apr	0.1n 0.2n 0.1p	0.3n 0.2p		0.1n 0.2p 0.0n -p		1.3n 0.1p
May	0.0n -p	0.3n -p		0.1n 1.0p -n 0.4p		
Jun	0.0n 0.6p		0.0n 0.0p	0.0n 0.4p 0.0n -p		1.3n 0.1p
Jul				0.0n 0.4p 0.0n 0.4p		2.8n 0.1p
Aug	0.0n 0.6p			0.1n 0.3p		
Sept	0.0n 0.3p	0.0n 0.1p		0.0n 0.2p -n 0.4p	0.0n 0.2p	2.7n 0.1p
Max.	0.1n 0.6p 0.3n 0.2p	0.2n 0.6p 0.3n 0.6p	0.1n 0.5p	0.3n 1.0p 0.1n 0.6p	>3.4n 0.5p	>3.4n 0.3p >3.4n 1.0p

a) Nutrient values for nitrate (NO<sub>3</sub>, as nitrogen) are in black and phosphate (PO<sub>4</sub>, as phosphorous) in red; both are expressed in mg/L. Comparable site values have been measured in previous years. The natural background level of nitrate in surface water is typically less than 1.0 mg/L, while natural levels of phosphate range from 0.005 to 0.05 mg/L.

## Appendix D



### Water Quality Index Values

The Lower San Diego River (LSDR) Water Quality Index (WQI) has been developed to present a simple and concise expression of monitored physical-chemical and bacteriological water quality data compiled by the SDRPF RiverWatch Team on a monthly basis. The index is intended to aid in assessment of the lower river, primarily for multiple non-body contact recreational uses and overall environmental enhancement within the watershed. As designed, the metrics constitute a means to compare averages, variances and trends in normalized values over time (temporally) and by relative location (spatially) within the watershed. The index allows individuals to interpret large amounts of aggregated data and relate overall water quality variations to changes, be they from natural causes or anthropogenic impairments. The WQI has been used to identify basic water quality trends over the past 20 years of monitoring and single out potential problem areas within the lower watershed. Such patterns and specific locations can then be screened and evaluated in greater detail through direct observation of pertinent site-specific data by various public agencies and organizations entrusted with protection and enhancement of river water quality. Used in this manner, the index provides a further metric for evaluating effectiveness of many of the San Diego River improvement programs and may also be of support to agencies and organizations responsible in reformulating priorities or updating specific policies.

Running average WQI values from WY05 through WY24 are expressed by river section and reach on **Charts D.1 and D.2**, respectively. The overall variance in *temporal* WQI values and streamflow are expressed on **Chart D.3**. The variances in *spacial* index values for all lower river monitoring sites are presented on **Chart D.4**.

**Chart D.1** provides the range (max.-green, min.-red) in monthly values, the running averages by river section as well as monthly streamflow (blue bars) over the 20-yr period (WY05-WY24) of water quality monitoring. The positive correlation in seasonal fluctuation between streamflow and water quality values is apparent. Poorer water quality at all sections occur during years of below average discharge. The overall change in the index over time are shown as a dashed lines. General declines experienced during the first decade were countered by recovery during the second. The current running average index of 40 is 21% above the 20-yr norm of 33. The highest index of 41 in WY05 was 24% above norm. The lowest running average index value of 21 occurring in Nov. '04 was 37% below the current norm.



**Chart D.2** presents overall (LSDR) monthly running average WQI values (heavy black lines) over the past 20 years. Seasonal patterns expressed in monthly results and trends described by running averages in values are apparent for each reach of the river. The water quality fluctuations over time in individual reaches, sections and the overall LSDR flow-weighted values expressed on both a running average and seasonal cycle basis can be observed. The Upper Santee Basin (USB) reach (red line, sites 13&14) have presented the lowest index values since March of 2010. The Mission Gorge portion (blue line, mid-section of the lower river watershed) consistently presents the highest values. As shown on both charts, the greatest rate of decline in lower river water quality occurred over a 36 month period (WY12 through early WY15) during well-below normal streamflow brought about by prolonged drought conditions.

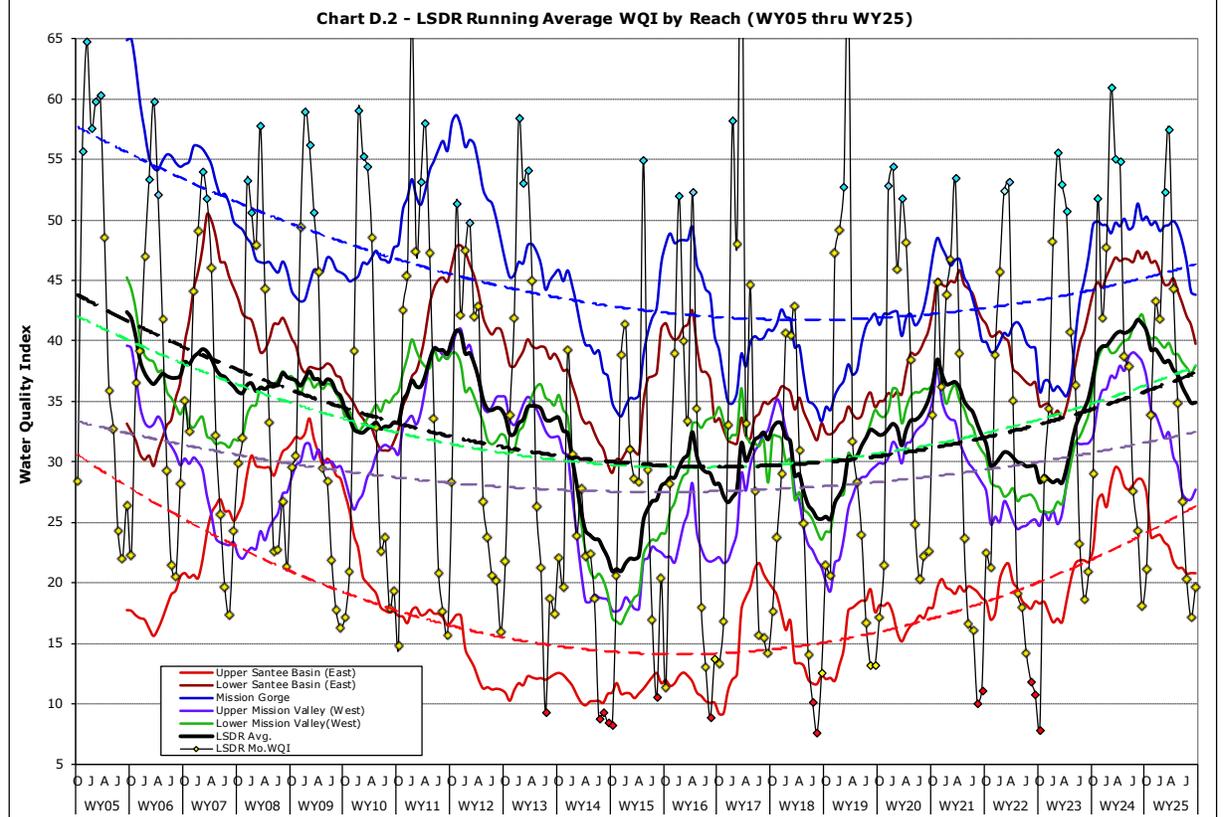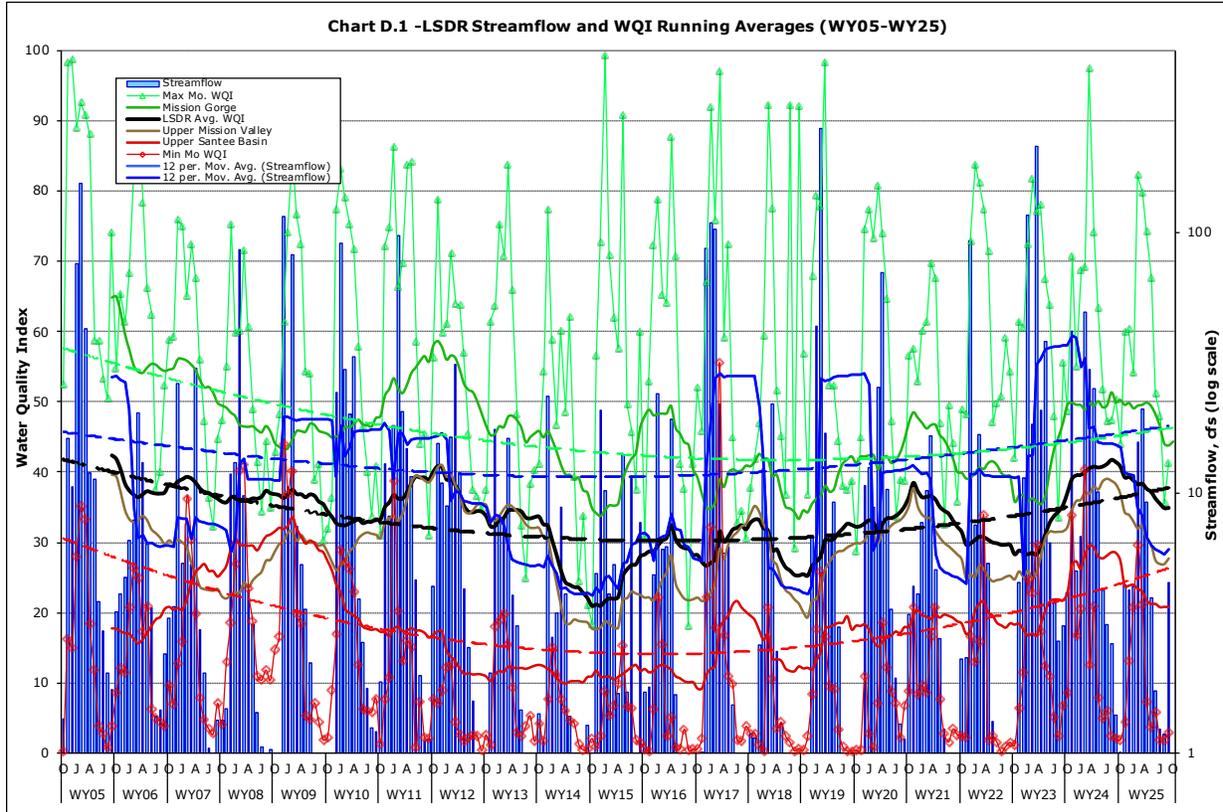

**Chart D.3** presents a *temporal* summary of variances in the water quality index values profiled on a monthly, seasonal and average annual water year basis for the five reaches of the river and overall. Variances in the index can be visually compared to changes in 3-day streamflow (blue bars) expressed on the same timelines. Positive correlations are evident, i.e., increased average daily flow and higher water quality values. Low-flows extending throughout the summer and early fall months result in significantly poorer water quality. In year's of above average dry-weather (base) flows, improvements in index values for each of the five reaches and overall (heavy black line) of the lower river system occur. Irrespective of water year, the Mission Gorge reach (blue curve) has presented the highest WQI values while the Upper Santee Basin reach (red curve) has (with exception of WY08/09) carried lowest values. The second poorest water quality reach is Upper Mission Valley (green curve). The second best reach is Lower Santee Basin (brown curve). On a seasonal basis autumn and summer values are consistently lower than winter (highest) and spring (second highest) values for all reaches and overall. August is typically the month of lowest water quality and lowest streamflow. January and March are typically the months of best water quality for all reaches. Larger flood flows, often occurring in February, typically depress WQI values by several points compared to the other three winter months.

**Chart D.4** provides a *spatial* profile of average annual WQI by river monitoring site, reach and section for this year (WY23), compared to last year (WY21), the best (WY05), the worst (WY14) and the 19-yr winter (Dec-Jan), summer (Jun-Sept) and annual (Oct-Sept) norms. The sites are shown from left-to-right in the order they occur ascending upstream. The current (WY24) average annual WQI values for each site, shown as both a heavy black line and as colored bars, are above norms (dashed color bars) at all but sites 13e/13w (Walmart Pond/Mast Park W). that present the poorest overall WQI values. Site 7 (Kaiser Pond Outfall) in Upper Mission Valley reach also continues to present poor index values. The Mission Gorge portion (sites 8-10) of the lower river continues to demonstrate best overall water quality. The 20-yr winter (dashed blue) and summer (dashed red) WQI norms are also shown in spacial profile in order to provide basic understanding of the range in index values occurring throughout the lower river system extending from Lakeside to the estuary in lower Mission Valley.

Monthly and running average WQI values for each reach of the lower river and overall are presented in Section 5 of the WY24 Annual WQM Report (Charts 5.1-5.6) together with a brief discussion of the individual trends associated with each. It is apparent that some reaches of the river experience water quality changes more rapidly than others and that several sites represent "hotspots" of continued poorer quality waters that are less susceptible to changes in ambient conditions. The general trends in variance from the overall LSDR norms for each of the water quality metrics by river reach are also presented in Appendix F (Charts F.1-F.6).

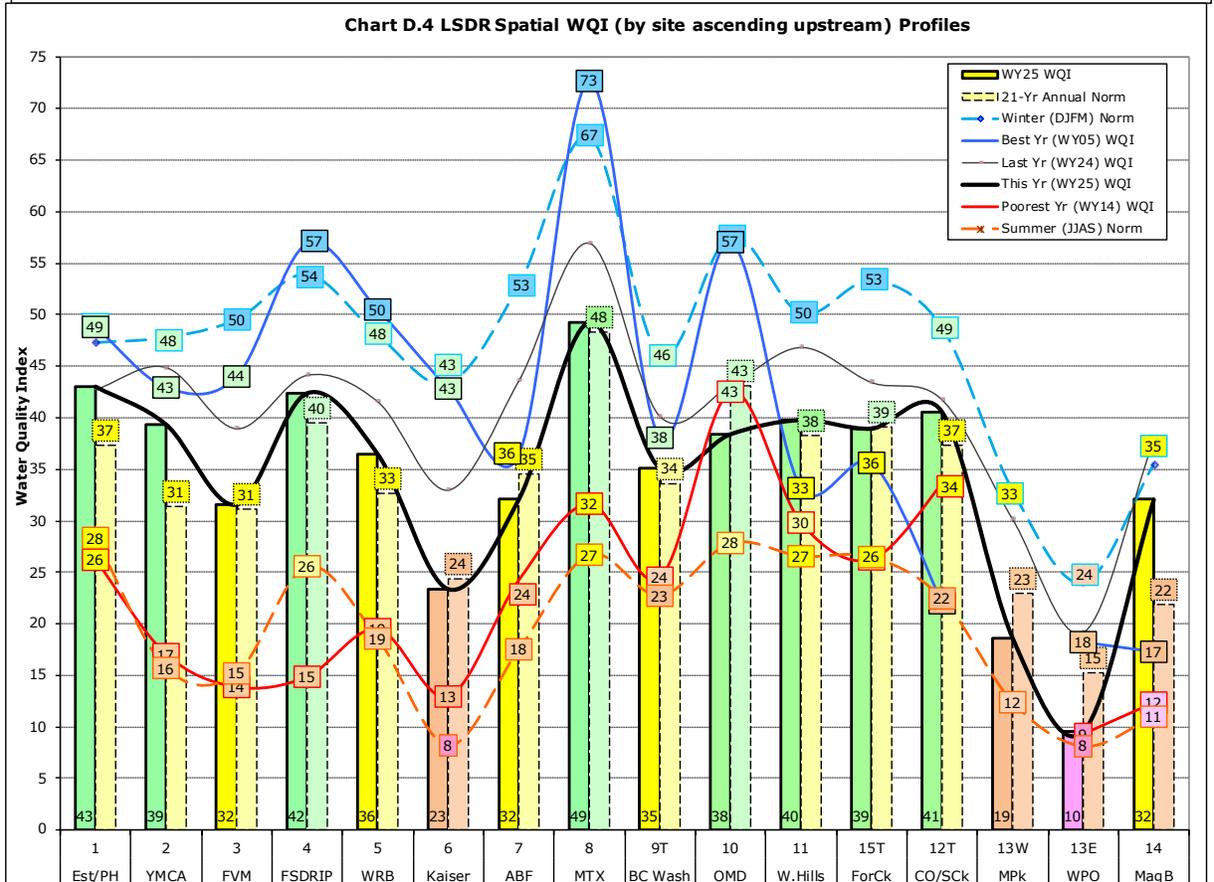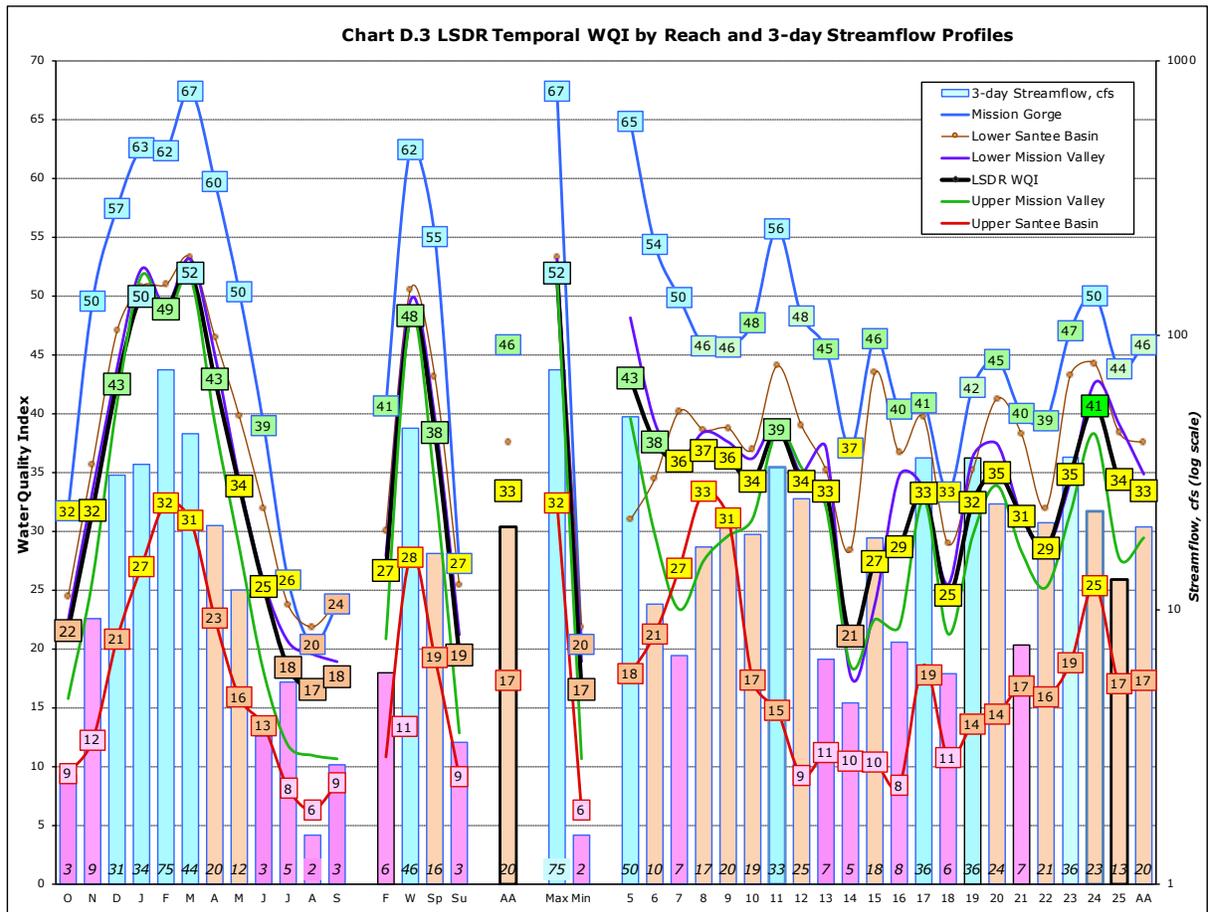

## Appendix F - Riverwatch Team Members (2004-2025)

Aidan Kennedy	Ehk'lu (Soltan)	Lesley Gallegos Stearns ^^	*Paul Hormick
Alan Ramirez	Emily Klein	Linda King	Paul Nguyen
Alexandra Shalosky	Erin Babich	Linda Tarke	Phillip Musegaas ^^
Alexia Longley	Fred Ward	Lindsey Dornes	Rachel Morales
Amethyst Cruspero	Gabriel M. Mercado	Lindsey Teunis	Randy Mitchell
Amy Cook	Gary Strawn ***	Lindy Harshberger	Raymond Ngo
Ang Nguyen	George Liddle ***	Liz Freisen	Reggie Agarma
Barbara Owen	Gina Martin	Lois Dorn	Renee Woodward
Bethany Carter	Graham Hoffman	Lucas Salazar	Russell Burnette
Bill Martin	Heidi Rodarmer	Madison McLaughlin	Sami Collins
Birgit Knorr	Jack Greco	Maesa Hanhan	Samantha Buck
Bob Smith	Jalil Ahmad	Marcus King	Samuel Martin
*Bob Stafford	Janae Fried	Marina Pak	Sandra Pentney
Brent Redd	Jasmin Augstin	Mark Carpenter	Sara Winter
*Calvin Vine	Jason Andres	*Mark Drieling	Shelia-Ann Jacques
Cameron Bradley	Jenny Liang	Mark Hammer	Silvana Procopio
Camila Ruiz	Jim Thornley	Marlene Baker	Star Soltan
Carl Abulencia	Joan Semler	*Martin Offenhauer	Tara Smith
Celena Cui	John Kennedy ***	Mary Hansen	Tasjanei Ballard
Chandler Hood	Joseph Ensberg	Matt Olson	Tim Toole
Chris Dooling	Joyce Nower	Melany Vina	Tina Davis
Chris Peter	Karrenton Fountain	Melissa Garret	Tom Younghusband
Chris (Soltan)	Katharyn Morgan	Melissa Maigler	Toni Nguyen
Christine Lavoine	Katherine Crosby	Michael Mikulak	Tony de Garate
Clint Williams	Kathryn Stanaway	Michael Sowadski	Trish Narwold
Cody Gallagher	Katy Robinson	*Mike Hanna	Valerie Rawlings
Conrad Brennen	Kayla Lohrli Hynes	Mike Hunter	Veronika Shevchenko
Craig McCartney	Kelly Brown	Mitchell Manners	Vidhya Nagarajan
Dani Tran	Kenneth Santos	Mitzi Quizon	*Vince Caldwell
Danielle Marshall	Kerry Ensberg	Monica Torres	Wade Caleca-Stevenson
David Lapota	Kevin Bernaldez	Mojisola Ogunleye	Wendy Kwong
Demitrio Duran	Krissy Lovering	Natlie Rodriguez	Yang Jiao
Dimple De Luna Sumajit	Kristofer Gonzalez	Nicole Beeler	Yvette Navarro
Donna Zoll	Krystal Tronbol	Noah Potts	
Doug Taylor	Laqueta Strawn	Nolan Dautremont	
Duncan Miller	Laura Fuller ^^	Norrie Robbins	*** Team Leaders
Ebony Quilteret			^^ SD Coastkeepers
Edward Garritty			

## Appendix G - Glossary

### Abbreviations:

AADF - Average Annual Daily Flow  
 ACC - Average Coliform Count (arithmetic mean of fecal coliform, e-Coli & total coliform in MPN/100mL)  
 ADWF – Average Daily (stream) Dry-Weather Flow  
 AFY - acre-feet per year  
 Avg– Average  
 cfs - cubic feet per second (stream flow/discharge)  
 Ck – Creek  
 CY - Calendar Year (Jan 1 - Dec 31)  
 DO – Dissolved Oxygen  
 DOD- Dissolved Oxygen Depletion (level below minimum required)  
 DO%Sat – Dissolved Oxygen expressed as percentage of DO level at Saturation Point  
 d/s – downstream // {u/s – upstream}  
 E – East // {W – West}  
 FSDRIP – First San Diego River Improvement Project  
 ft. – feet // {mi. - mile}  
 gal – gallon  
 Ln(x) - natural logarithm of (x) to base-e (2.718)  
 log(x) - common logarithm of (x) to base-10  
 L//U – lower//upper (as in river reaches)  
 LSDR – Lower San Diego River  
 max//min – maximum//minimum  
 MCC - Mean Coliform Count (geometric mean of fecal coliform, e-Coli & total coliform in MPN/100mL)  
 mg/L – milligrams per litre  
 mS/cm – milliSeimens per centimetre  
 (1 mS/cm = 1,000 uS/cm)  
 MG – Mission Gorge (mid-section of LSDR)  
 MV – Mission Valley (West section of LSDR)  
 MPN - Most Probable Number (of coliform organisms)  
 SB – Santee Basin (East section of LSDR)  
 PDMWD – Padre Dam Municipal Water District  
 pH – measure of acidity or basicity (decimal logarithm of hydrogen ion activity)  
 ppm – parts per million  
 Q - stream flow or discharge  
 SB – Santee Basin  
 SpC – Specific Conductance (also Conductivity sometimes abbreviated SC)  
 SDRPF – San Diego River Park Foundation  
 TDS – Total Dissolved Solids  
 Temp. – Water Temperature  
 TN/TP – Total Nitrogen/ Total Phosphorus (nutrients)  
 USGS – U.S. Geological Survey  
 uS/cm –microSeimens per centimeter  
 (1 uS/cm = 0.001 mS/cm)  
 u/s - upstream // {d/s - downstream}  
 W - West // {E - East}  
 WQI – Water Quality Index (WQI<sub>a</sub>)  
 WQI<sub>(4)</sub> - WQI using 4 parameters (current)  
 WQI<sub>(6)</sub> - WQI using 6 parameters (early yrs)  
 WY – Water Year (Oct 1 – Sept 31)  
 % - percent  
 %Sat - percent of DO saturation value  
 C – degrees Celsius °C = (°F-32)\*5/9  
 °F – degrees Fahrenheit °F = (°C\*9/5) + 32  
 Flow (cfs) = Velocity (ft/sec)\*Cross-sectional area (sqft)

Constituent Load (lbs/day) = Q (mgd)\*Concentration (ppm)\*8.34; or Q (cfs)\*Concentration (mg/L)\*5.39 where Q is streamflow/river discharge.

Total Dissolved Solids (TDS in mg/L) = 670\*Specific Conductance, (where SpC is in mS/cm). An approximate relationship for LSDR watershed; other variables (e.g., temperature, pressure, specific ions) are considered negligible).

DO/DO%Sat relationship is defined by the following polynomial equation:  
 $DO(mg/L) = DO\%Sat * [0.004 * T^2 - 0.343 * T + 14.2] / 100$ ;  
 $DO\%Sat = DO(mg/L) * 100 / [0.004 * T^2 - 0.343 * T + 14.2]$ ,  
 where T = temperature is in °C.  
 Other variables, incl. barometric pressure, elevation and conductivity (SpC), have negligible impact on the DO-DO%Sat relationship within the LSDR watershed.

SDR Water Quality Index (WQI) is calculated using the following set of equations:

$WQI_4 = DO\%Sat * 2.5 * T \text{ factor} * Q \text{ factor} / \log(SpC)$ ;  
 where SpC is expressed in uS/cm;  
 the T factor =  $0.0055T^3 - 0.163T^2 + 1.37T - 2.5$ , and the Q factor =  
 $0.56 + 0.173LnQ - 0.002LnQ^2 - 0.0033LnQ^3$  (M Valley);  
 $0.72 + 0.15LnQ - 0.0051LnQ^2 - 0.004LnQ^3$  (M Gorge);  
 $0.87 + 0.107LnQ - 0.018LnQ^2 - 0.003LnQ^3$  (Santee);  
 $0.1 + 0.05LnQ - 0.042LnQ^2 - 0.0011LnQ^3$  (tributaries)

$WQI_6 = Avg. [DO\%f * wt_{(DO)}, SpC^f * wt_{(SC)}, pH^f * wt_{(pH)}, MCC^f * wt_{(MCC)}, Q^f * wt_{(Q)}, Temp^f * wt_{(T)}]^1.75$   
 where  $wt_{(DO)} = 3$ ,  $wt_{(SC)} = 2$ ,  $wt_{(pH)} = 1$ ,  $wt_{(MCC)} = 1$ ,  $wt_{(Q)} = 2$  and  $wt_{(T)} = 1$  (formula discontinued in WY08)

The LSDR WQI was specifically developed for the RiverWatch Monitoring Program, however, the equations can also be applied to water quality and hydrologic data for other inland watercourses where metrics are available.

### Water Equivalents:

1 cf = 7.48 gal = 62.4 lbs of water  
 1 AF = 43,560 cf = 325,900 gal  
 1 psi = 2.31 ft of water (head)  
 1 mg/L = 1 ppm (in water)  
 1 cfs = 450 gpm = 0.646 mgd = 1.98 AF/day = 724 AFY  
 1 mgd = 694 gpm = 1.547 cfs = 3.06 AF/day = 1,120 AFY  
 1,000 gpm = 1.436 mgd = 2.23 cfs = 4.42 AF/d = 1,614 AFY  
 1 inch (rainfall) = 25.4 mm

### Formulas:

## Appendix H - References

1. *The Role of the San Diego River in Development of Mission Valley*, Nan Papageorge, The Journal of San Diego History (Vol. 17, No. 2), Spring 1971
2. *Evaluation of the Mission, Santee, and Tijuana Hydrologic Subareas for Reclaimed-Water Use*, San Diego County, CA, John Izbicki, USGS Water Resources Investigations Report 85-4032, 1985
3. *Water Quality Control Plan for the San Diego Basin*, San Diego RWQCB, 1994
4. *Waste Discharge and Water Recycling Requirements for the Production and Purveyance of Recycled Water*, Padre Dam Municipal Water District (PDMWD), San Diego County, San Diego RWQCB, 1997
5. *Groundwater Report*, San Diego County Water Authority (SDCWA), 1997
6. *Waste Discharge Requirements for PDMWD Padre Dam Water Recycling Facility, Discharge to Sycamore Creek and the San Diego River*, San Diego County, San Diego RWQCB Order No. 98-60 (NPDES No. CA010749), 1998
7. *Modification of Water Quality Order 99-08-DWQ State Water Resources Control Board (SWRCB) National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction Activity*, San Diego RWQCB Resolution No. 2001-046, 2001
8. *General Waste Discharge Requirements for Groundwater Extraction Waste Discharges from Construction, Remediation, and Permanent Groundwater Extraction Projects to Surface Water within the San Diego Region except for San Diego Bay*. San Diego RWQCB, Order No 2001-96 (NPDES No. CAG919002), 2001
9. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego in conjunction with Cities of El Cajon, La Mesa, Santee, Poway and County of San Diego, 2001
10. *Waste Discharge Requirements for Discharge of Urban Runoff from Municipal Separate Storm Sewer Systems (MS4) Draining the Watersheds of the County of San Diego, the Incorporated Cities of San Diego County, and the San Diego Unified Port District*, San Diego Regional Water Quality Control Board (RWQCB) Order No 2001-01 (NPDES No. CAS0108758), 2001
11. *General Waste Discharge Requirements for Discharges of Hydrostatic Test Water and Potable Water to Surface Waters and Storm Drains or Other Conveyance Systems*, San Diego Region, San Diego RWQCB, 2002
12. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego Lead Agency, City of Santee, City of Poway, County of San Diego, Jan 2003
13. *Watershed Sanitary Survey*, City of San Diego Water Department, Jan 2001, rev. May 2003
14. *Clean Water Action Plan and Status Report*, County San Diego Project Clean Water, June 2003
15. *San Diego River Watershed Water Quality Report*, Anchor Environmental & others, Oct 2003
16. *San Diego River Watershed Management Plan Final Water Management Plan*, Anchor Environmental and others, SDR Watershed Work Group, March 2005
17. *2005 Watershed Sanitary Survey - Volume 2 San Diego River System*, City of San Diego Water Department, Water Quality Laboratory, Aug 2005

## Appendix H (continued) References

18. *San Diego River Baseline Sediment Investigation Final Report*, City of San Diego, Weston Solutions, Oct. 2005
19. *Monitoring Workplan for the Assessment of Trash in San Diego County Watersheds*, (Weston Solutions Brown & Caldwell), County of San Diego, Aug 2007
20. *San Diego Integrated Regional Water Management Plan*, San Diego County Water Authority, City of San Diego and County of San Diego, Oct 2007
21. *Allopathic potential of two invasive alien Ludwig spp*, Dandelot et. al., Elsevier Aquatic Botany 88 (4):311-316, Dec 8, 2007
22. *Surface Water Ambient Monitoring Program (SWAMP) Report on the San Diego Hydrologic Unit, Final Technical Report 2007*, Southern California Coastal Water Research Project, San Diego RWQCB, Jan 2008
23. *San Diego River Watershed Urban Runoff Management Plan*, City of San Diego, Storm Water Pollution Prevention Division, TRC, March 2008
24. *There is No San Diego River*, Bill Manson, San Diego Weekly Reader, Oct 22, 2008
25. *The Ecological and Hydrological Significance of Ephemeral and Intermittent Streams in the Arid and Semi-arid American Southwest*, EPA/660/R-08/134, Nov. 2008
26. *Water, The Epic Struggle for Wealth, Power, and Civilization*, Steven Solomon, Harper, 2010
27. *San Diego River FY 2008-2009 WURMP Annual Report*, TRC, January 2010
28. *San Diego River Tributary Canyons Project Final Feasibility Report*, April 2010
29. *The invasive water primrose Ludwigia grandiflora in Germany: First record and ecological risk assessment*, Nehring & Kolthoff, Agency for Nature Conservation, Germany, Aquatic Invasions 2011 REABIC (Vol 6, i1: 83-89) Dec 16, 2010
30. *Guidelines for Citizen Monitors, SWAMP Clean Water Team Citizen Monitoring Program Guidance Compendium*, SWRCB website (10/5/11 update)
31. *2011 Long-Term Effectiveness Assessment, San Diego Stormwater Co-permittees Urban Runoff Management Programs*, Final Report, Walker Assoc. Weston Solutions, June 2011
32. *San Diego River Conservancy 2012 Work Plan*, Governing Board, March, 2012
33. *The Day the San Diego River Was Saved: The History of Floods and Floodplain Planning in Mission Valley*, Philip R. Pryde, Journal of San Diego History, (Vol. 57, No. 3) 2012
34. *San Diego River Watershed Bioassessment and Fish Tissue Analysis*, RWQCB, Feb. 2013
35. *San Diego River Park Master Plan*, City of San Diego, April 18, 2013
36. *Watershed Asset Management Plan, Final Report*, Storm Water Division, Transportation and Storm Water Department, City of San Diego, July 19, 2013
37. *San Diego River Watershed Comprehensive Load Reduction Plan - Phase II*, Tetra Tech Inc, Final July 24, 2013
38. *Aquatic Conservation: Marine and Freshwater Ecosystems, A success story: water primroses, aquatic pests*, Thouvenot, Haury & Thiebaut, (Vol 23, i5: 790-803) Oct. 2013
39. *San Diego River Restoration Involves Clearing Homeless, And Their Trash*, Susan Murphy, KPBS,

## Appendix H (continued) References

40. *San Diego River Watershed Monitoring and Assessment Program*, B. Bernstein (SWAMP-MR-RB9-2014-0001), RWQCB, Jan. 20, 2014
41. *Nonstructural Non-Modeled Activity Pollutant Load Reduction Research - Addendum Final*, HDR, City of San Diego, Nov. 5, 2014
42. *San Diego River Causal Assessment Case Study, Appendix C , Causal Assessment Evaluation and Guidance for CA*, SCCWRP Tech Rpt. 750, April 2015
43. *Lower San Diego River Dissolved Oxygen Levels*, SDRPF RiverWatch TM. J.C. Kennedy,, June 19, 2015
44. *Lower San Diego River Streamflow and Water Quality Metrics*, J.C. Kennedy, SDR Coalition presentation, Aug. 21, 2015
45. *San Diego River Watershed Management Area Water Quality Improvement Plan*, Walker Assoc. & Walker Assoc. & AMEC, San Diego RWQCB, September 2015
46. *Analysis of Anionic Contribution to Total Dissolved Solids in the Lower San Diego River*, Janae Fried, SDSU Thesis (Geological Sciences), Fall 2015
47. *San Diego River Watershed Management Area Water Quality Improvement Plan*, L. Walker & Assoc., January 2016
48. *Water Quality Analysis for San Diego Trail Carlton Oaks Golf Course Segment*, Cities of San Diego and Santee CA, Nasland Eng. for SANDAG, Dec 21, 2016
49. *Application of regional flow-ecology relationships: ELOHA framework in the San Diego River watershed*. E.D Stein SCCWRP Research Article, DOI: Ecohydrology e1869, April 2017
50. *Regional Assessment of Human Fecal Contamination in Southern California Coastal Drainages*, SCCWRP #0999, International Journal Env.Research & Public Health, Aug. 2017
51. *San Diego Region Bacteria TMDL Cost-Benefit Analysis*, Final Report, RWQCB, Oct. 2017
52. *Increased Homeless Population Along San Diego River Hampers Water Quality*, KPBS, Erik Anderson, Nov. 28, 2017
53. *Interim Report, 2017 Field Season LSDR Aeration Project*, SDSU, Trent Biggs, Feb. 2018
53. *San Diego River Watershed Management Area Water Quality Improvement Plan (SDRWQIP)*, Project Clean Water, March 14, 2018
54. *Background WQ Analytics on the Upper FSRRIP Channel, Hydrology and Water Quality*, SDRPF, TSM1.18, J.C. Kennedy, Jan. 2018
55. *SDSU Mission Valley Campus Master Plan EIR, Chapter 4.9 Hydrology & Water Quality*, SDSU, Rick Eng./Geosyntec, Jan. 2020
56. *Lower San Diego River Exotic Weed Mapping Report*, SDRPF, 2020
57. *Dissolved Oxygen Levels at Mast Park East*. RiverWatch WQTM1.20, J. Kennedy & G. Strawn, May 2020
58. *Lower San Diego River Annual Water Quality Monitoring Reports: 2004-2022*, SDRPF RiverWatch, J. Kennedy and volunteer monitoring team members.
59. *Monthly Water Quality Monitoring Reports: Lower San Diego River*, SDRPF RiverWatch, Oct. 2004 through Sept. 2025.
60. *State of the San Diego River 2020 Report*, SDRPF, [www.sandiegoriver.org/SDR](http://www.sandiegoriver.org/SDR) Online Information Center

## Appendix E

### Trends in WQM Data Running Averages (WY05-WY25)

The variances in 12-mo running average values for selected sections of the lower river and overall, extending from Sept. '04 through Sept. '25, for each of the primary WQM metrics are presented in **Charts E.1-E.5** along with associated 21-yr trends (dashed lines/curves) for the three sections of the river (SB, MG & MV) as well as for the overall (LSDR) watershed.

Chart E.1 shows trends in variance in LSDR water temperatures by section over the past 21 years. The greatest variance above norms in all sections of the river occurred during the four years (WYs 15-18). Greatest variance below norms occurs in the Santee Basin

The final **Chart E.6** compares overall (LSDR) variances and trends for several key water quality metrics. Extended periods (cycles) of below average rainfall (red line) and streamflow (blue) result in below average DO (green), above average SpC (yellow) and below average WQI values (black line). The trends presented in the six charts are discussed in further detail in Section 5 of the WY25 Annual Report.

Lower San Diego River WY25 Water Quality Monitoring Report Appendices A-H

